

www.ishalighting.com

Customized

i.SHA
THE ULTIMATE LIGHTING SOLUTION



中山市依莎照明科技有限公司

ZHONGSHAN i.SHA LIGHTING TECHNOLOGY CO., LIMITED

④ 广东省中山市古镇镇曹三工业园同兴二路8号

Factory: NO.8 Tongxing Second Road, Caosan Industrial Park, Guzhen Town, Zhongshan City, Guangdong Province, China.

广东省中山市古镇镇中兴大道68号星光联盟9楼C区12卡

Exclusive Shop: Room 12, 9th Floor, Area C, Star Alliance, 68 Zhongxing Avenue, Guzhen Town, Zhongshan City, Guangdong Province

2026依莎系列产品目录

2026 CATALOGUE OF i.SHA SERIES

YOUR
EXCLUSIVE LIGHTING
DESIGNER

依莎，定制 懂你的光

Your Exclusive Lighting Designer

依莎·定制懂你的光



Light ensouls the building
Shadow creates space and atmosphere
i.SHA is born for the arts
We are specialized in lights, so that we can create light that most suited for you
i.SHA aims to customize masterpieces for you

Lighting
Design Customizes Arts
—
灯光设计定制艺术



BRAND IDEA

品牌理念

灯具不只是灯具
更是灯光艺术
灯光，赋予建筑灵魂
光影，营造空间氛围
光与空间
光与自然
光与情感
光与健康
光与生活
皆密不可分
——光，是感知空间的媒介

而如何对光进行精准控制
以极简的美学设计诠释光的艺术
便是依莎 灯光设计师们孜孜不倦的追求...

Lamps are not only lamps
But the arts of light
Light ensouls the building
Shadow creates space and atmosphere
Light and space
Light and nature
Light and emotion
Light and health
Light and life
They are all inextricably linked
——Light is a medium for perceiving space

How to precisely control the light
and interpret the art of light with minimalist aesthetic design
is tireless pursuit of i.SHA's light designers...

BRAND STORY

品牌故事

品牌溯源——源于光的美好馈赠

光，乃万物之源，是大自然赐予人类最美好的礼物。
世界著名建筑师贝聿铭曾说“让光线来做设计”，
伟大的建筑师路易斯康也认为“光是一个空间的神奇创造者”。

i.SHA依莎秉承最纯粹的初心，
以象征光明的i.SHA依莎灯光艺术，赋予建筑空间以灵魂。

Light is the source of all things, and it is the nature's best gift to human beings.
The world-renowned architect Ioh Ming Pei once said "Let the light to guide the design".
The great architect Louis Kahn also believed "Light is the magical creator of a space".

i.SHA adheres to its purest original intention
Use the i.SHA arts of light that symbolizes lighting to ensoul the building.

品牌创建——国际顶尖设计师工作室

2008年，i.SHA依莎创始人与国内多位顶尖的室内设计师，创建
“i.SHA依莎灯光设计定制工作室”，服务案例遍及欧洲、东南亚、南
美洲等世界各地，精准的控光技术和丰富的灯光灯光定制系统解决方案
经验，让i.SHA依莎成为顾客心中灯光艺术的最佳倾听者与设计师。

i.SHA依莎，为顶尖设计顶尖，为杰作定制杰作。
因为懂光，所以定制懂你的光。

In 2008, the founder of i.SHA and many top interior designers at home and abroad
together created "i.SHA Lighting Design and Customization Studio". With its service cases
in Europe, Southeast Asia, South America and other parts of the world, i.SHA has precise
light control technology and rich experience in lighting and lighting customized system
solutions, which makes i.SHA the best listener and designer of lighting arts in customers'
minds.

i.SHA aims to customize masterpieces for you with our top design
We are specialized in lights, so that we can create light that most suited for you

品牌价值——为空间赋予艺术生命力

建筑是凝固的音乐，而照明则是流动的天际线。
对于依莎来说，光不仅是建筑 and 空间价值的核心，光与空间，光与自然，光与
情感，光与健康，光与生活，皆密不可分。
光，是感知空间的媒介，更能改善生活，实现社会创新发展。

2020年，i.SHA依莎开启品牌战略升级，全面进军国内市场。
i.SHA依莎，以极简的美学设计诠释光的艺术，将不遗余力打造成为灯光定制
系统解决方案专家，从而实现“铸就百年依莎，缔造光影艺术价值”的宏伟品
牌愿景。

Architecture is the frozen music, while lighting is a floating skyline.
For i.SHA, light is not just the core of the building and space value. Light and space, light and
nature, light and emotion, light and health, light and life are all inextricably linked.
Light is a medium for perceiving space, which can improve life and realize social innovation
and development.

In 2020, i.SHA starts its brand strategy upgrade, fully entering the domestic market.
i.SHA interprets the arts of light with minimalist aesthetic design, sparing no effort to become
an expert in lighting customization system solutions, thereby realizing the grand brand vision
of "making i.Sha a time-tested brand and creating the value of light and shadow art".



Lighting design customization studio

灯光设计定制工作室



YOUR
EXCLUSIVE LIGHTING
DESIGNER

依莎，定制懂你的光

核心价值主张释义：

灯光，赋予建筑灵魂

光影，感知空间氛围

依莎，为艺术之光而生

因为懂光，所以定制更懂你的光

依莎，为杰作定制杰作

Interpretation of the core value:

Light ensouls the building

Shadow creates space and atmosphere

i.SHA is born for the arts

We are specialized in lights, so that we can create light that most suited for you

i.SHA aims to customize masterpieces for you

Lighting
Design Customizes Art

灯光设计定制艺术

BRAND Company profile

i.SHA依莎简介

中山市依莎照明科技有限公司成立于2008年，坐落于“中国灯饰之都”中山古镇，是一家集商业照明产品研发、设计、生产、销售、服务于一体的高科技企业。公司拥有成熟的生产供应链体系，完善的检测设备，数十台车床和压铸机，以及资深的光学工程师、电学工程师等专业技术人才。i.SHA依莎照明产品线涵盖商业照明和家居照明领域，全方位满足各类空间灯光应用解决方案的需求。

Zhongshan i.SHA Lighting Industrial Co., Ltd. was established in 2008, which is located in the ancient town of Zhongshan that is known as the "Capital of Decorative Lighting in China". It is a high-tech enterprise which integrates research and development, design, production, sales and service of commercial lighting products. The company has a mature production and supply chain system, complete testing equipment, dozens of lathes and die-casting machines, as well as senior optical engineers, electrical engineers and other professional and technical personnel. The i.SHA lighting product line covers the areas of commercial lighting and home lighting, which can fully meet the needs of various space lighting as your application solutions.

BRAND Culture

品牌文化

品牌广告语 依莎·定制懂你的光
品牌定位 灯光设计定制艺术
品牌使命 成为灯光定制系统 解决方案专家
品牌愿景 铸就百年依莎 缔造光影艺术价值



THE CASE OF i.SHA

i.SHA依莎照明应用场景

- 私人别墅
PRIVATE VILLA
- 家居照明
HOME LIGHTING
- 办公场所
WORKPLACES
- 艺术空间
ART SPACES
- 品牌商店
BRAND STORES
- 酒店会所
HOTELS AND CLUBS
- 购物中心
SHOPPING CENTERS
- 餐厅酒吧
RESTAURANTS AND BARS



level

依莎照明技术，具备专业成熟的生产技术和设计研发制造能力，严格把控设计和生产品质，提供国际品质的高端商照产品。

在“亮度与对比度、空间距离舒适度、照度均匀性与稳定度”上，达到“设计大师的照明定制标准”，为空间赋予视觉极度舒适的空间体验感和艺术感。

With professional and mature production technology and design R&D and manufacturing capabilities, iSHA lighting technology can strictly control the design and production quality, providing high-end commercial lighting products of international quality.

In terms of "brightness and contrast, space distance comfort, and illuminance uniformity and stability", iSHA has reached the "lighting customization standard of a design master", endowing the space with an extremely comfortable spatial experience and artistic sense.

master



设计大师级别的定制标准
Design master-level customization standards



KX 3168依晨系列 SPOTLIGHT

高流明 | 深防眩 | 高功率

ADC12铸铝一体化灯体
ADC12 cast aluminum integrated lamp body

IP 44 防水螺丝设计
IP 44 waterproof screw design

高透光率柔光透镜
High transmittance soft light lens

高透光率柔光透镜
High transmittance soft light lens

防眩罩
Anti-glare mask




**0°-30°三档定位珠设计
确保光斑位置一致性**
The three-position positioning bead
design from 0° to 30°
ensures the consistency
of the light spot position



基本参数/Parameters

产品型号/Model	KX 3168 55-圆/Round
产品尺寸/Size (mm)	Φ63*80H
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	5-9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX 3168 55-圆/Round
产品尺寸/Size (mm)	Φ63*109H
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	8-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38° ☒ 50°

产品尺寸图/Dimension (mm)






**KX 3168依晨系列
SPOTLIGHT**
高流明 | 深防眩 | 高功率



基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	φ82*78H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	8-10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	φ82*95H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	12-15W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	φ82*127H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	15-20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX 3168 95-圆/Round
产品尺寸/Size (mm)	φ103*130H
开孔尺寸/Cutout (mm)	φ95
功率/Power (W)	20-30W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°

产品尺寸图/Dimension (mm)






基本参数/Parameters

产品型号/Model	KX 3168 75-方/Square
产品尺寸/Size (mm)	82*82*78H
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	8-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX 3168 75-方/Square
产品尺寸/Size (mm)	82*82*95H
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	12-15W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX 3168 55-方/Square
产品尺寸/Size (mm)	63*63*80H
开孔尺寸/Cutout (mm)	55*55
功率/Power (W)	5-8W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX 3168 55-方/Square
产品尺寸/Size (mm)	63*63*110H
开孔尺寸/Cutout (mm)	55*55
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)



无边框翅膀可调节高度
不挑石膏板厚度
The frameless wings can be adjusted in height
and are not restricted by the
thickness of the gypsum board




基本参数/Parameters

产品型号/Model	KX 3168 75-方/Square
产品尺寸/Size (mm)	82*82*127H
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	18-25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°



产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	KX 3168 95-方/Square
产品尺寸/Size (mm)	103*103*110H
开孔尺寸/Cutout (mm)	95*95
功率/Power (W)	20-25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°



产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	KX 3168 55-方 双头/Square
产品尺寸/Size (mm)	63*114*85H
开孔尺寸/Cutout (mm)	55*105
功率/Power (W)	8-12W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°



产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	KX 3168 55-方 双头/Square
产品尺寸/Size (mm)	63*114*115H
开孔尺寸/Cutout (mm)	55*105
功率/Power (W)	12-15W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°



产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model KX 3168 75-方 双头/Square

产品尺寸/Size (mm) 84*155*86H

开孔尺寸/Cutout (mm) 75*125

功率/Power (W) 8-10W*2

光学配置/Holder 1304/1507/020


防水等级/IP Level IP 44

面环颜色/Color ☐ 砂白/Matte White
☒ 砂黑/Matte Black

光学角度/Beam Angle (°) ☒ 15° ☐ 24° ☐ 38° ☐ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
75*125



基本参数/Parameters

产品型号/Model KX 3168 75-方 双头/Square

产品尺寸/Size (mm) 84*155*105H

开孔尺寸/Cutout (mm) 75*125

功率/Power (W) 12-15W*2

光学配置/Holder 1507/020/030/1816


防水等级/IP Level IP 44

面环颜色/Color ☐ 砂白/Matte White
☒ 砂黑/Matte Black

光学角度/Beam Angle (°) ☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
75*125



基本参数/Parameters

产品型号/Model KX 3168 75-方 双头/Square

产品尺寸/Size (mm) 84*155*135H

开孔尺寸/Cutout (mm) 75*125

功率/Power (W) 8-12W

光学配置/Holder 1507/020/030/1816


防水等级/IP Level IP 44

面环颜色/Color ☐ 砂白/Matte White
☒ 砂黑/Matte Black

光学角度/Beam Angle (°) ☐ 15° ☐ 24° ☐ 38° ☒ 50°


产品尺寸图/Dimension (mm)

开孔/Cutout
75*125



产品尺寸图/Dimension (mm)

开孔/Cutout
Φ75



基本参数/Parameters

产品型号/Model KX 3168 75-圆/Round

产品尺寸/Size (mm) Φ82*80H

开孔尺寸/Cutout (mm) Φ75

功率/Power (W) 10-12W

光学配置/Holder 1304/1507/020

防水等级/IP Level IP 20


面环颜色/Color
□ 砂白/Matte White
■ 砂黑/Matte Black

光学角度/Beam Angle (°)
15° 24° 38° 50°



产品尺寸图/Dimension (mm)

开孔/Cutout
Φ75



基本参数/Parameters

产品型号/Model KX 3168 75-圆/Round

产品尺寸/Size (mm) Φ82*96H

开孔尺寸/Cutout (mm) Φ75

功率/Power (W) 12-15W

光学配置/Holder 1304/1507/020

防水等级/IP Level IP 44


面环颜色/Color
□ 砂白/Matte White
■ 砂黑/Matte Black

光学角度/Beam Angle (°)
15° 24° 38° 50°



产品尺寸图/Dimension (mm)

开孔/Cutout
Φ75



基本参数/Parameters

产品型号/Model KX 3168 75-圆/Round

产品尺寸/Size (mm) Φ82*80H

开孔尺寸/Cutout (mm) Φ75

功率/Power (W) 10-12W

光学配置/Holder 1304/1507/020

防水等级/IP Level IP 44


面环颜色/Color
□ 砂白/Matte White
■ 砂黑/Matte Black

光学角度/Beam Angle (°)
15° 24° 38° 50°



产品尺寸图/Dimension (mm)

开孔/Cutout
Φ75



基本参数/Parameters

产品型号/Model KX 3168 75-圆/Round

产品尺寸/Size (mm) Φ82*76H

开孔尺寸/Cutout (mm) Φ75

功率/Power (W) 12-15W

光学配置/Holder 1304/1507/020

防水等级/IP Level IP 44


面环颜色/Color
□ 砂白/Matte White
■ 砂黑/Matte Black

光学角度/Beam Angle (°)
15° 24° 38° 50°





**KX 3168依晨系列
SPOTLIGHT**
隐形无边 | 非预埋款射灯

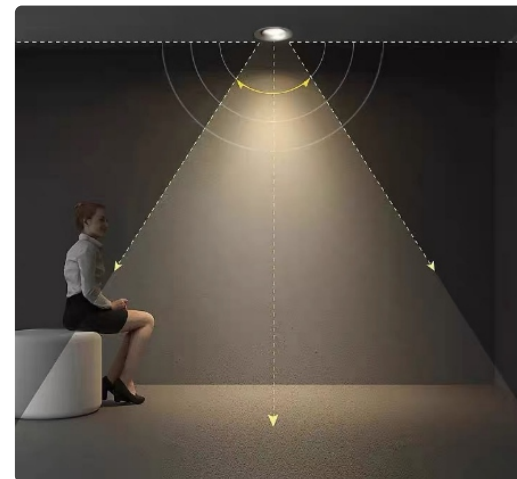


60° 大遮光角
有效过滤眩光, 深度防炫目

基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	Φ82*80H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	Φ82*80H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38° ☒ 50°

产品尺寸图/Dimension (mm)




无边安装后展示



**KX 3062依星系列
SPOTLIGHT**
高流明 | 深防眩 | 多模组




**Adjustment of the
Positioning point**
调整卡扣, 10-36°夹角

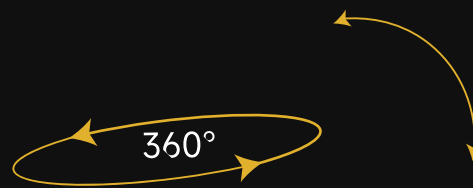

**Adjustable
Irradiation Angle**
灯具360°旋转调节




产品分解实物图
Product Breakdown Diagram

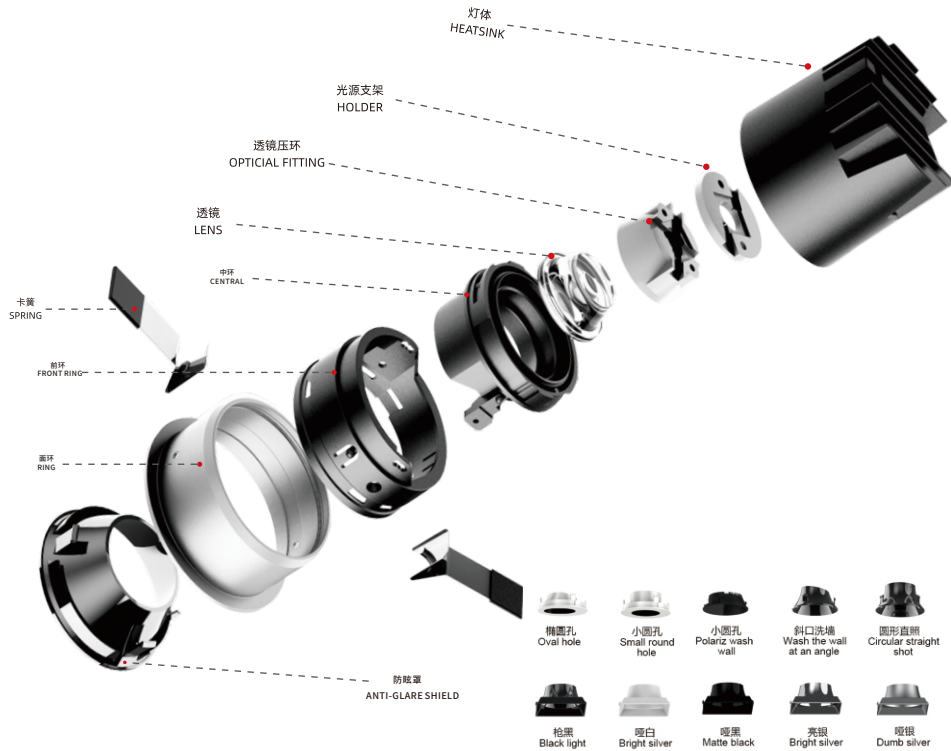

产品尺寸图/Dimension (mm)



开孔/Cutout
φ55



基本参数/Parameters

产品型号/Model	KX 3062 55-圆/Round
产品尺寸/Size (mm)	φ62*82H
开孔尺寸/Cutout (mm)	φ55
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°



基本参数/Parameters


产品型号/Model	KX 3062 75-圆/Round
产品尺寸/Size (mm)	φ82*95H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°



产品尺寸图/Dimension (mm)



开孔/Cutout
φ75



基本参数/Parameters


产品型号/Model	KX 3062 95-圆/Round
产品尺寸/Size (mm)	φ108*118H
开孔尺寸/Cutout (mm)	φ95
功率/Power (W)	15-20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°



产品尺寸图/Dimension (mm)



开孔/Cutout
φ95



基本参数/Parameters


产品型号/Model	KX 3062 120-150-圆/Round
产品尺寸/Size (mm)	φ135*142H φ165*152H
开孔尺寸/Cutout (mm)	φ120-150
功率/Power (W)	30-40W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°



产品尺寸图/Dimension (mm)




开孔/Cutout
φ120 φ150



产品尺寸图/Dimension (mm)

开孔/Cutout
55*55



基本参数/Parameters

产品型号/Model	KX 3062 55-方/Square
产品尺寸/Size (mm)	62*62*82H
开孔尺寸/Cutout (mm)	55*55
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°




基本参数/Parameters

产品型号/Model	KX 3062 75-方/Square
产品尺寸/Size (mm)	85*82*95H
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°



产品尺寸图/Dimension (mm)

开孔/Cutout
75*75




基本参数/Parameters

产品型号/Model	KX 3062 150*75-方/Square
产品尺寸/Size (mm)	157*82*118H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	10W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°



产品尺寸图/Dimension (mm)

开孔/Cutout
150*75




基本参数/Parameters

产品型号/Model	KX 3062 225*75-方/Square
产品尺寸/Size (mm)	230*84*95
开孔尺寸/Cutout (mm)	Φ120-150
功率/Power (W)	10W*3
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°



产品尺寸图/Dimension (mm)

开孔/Cutout
275*75



Versatile form,
flexible replacement



FIXED




ADJUSTABLE






**KX 3131落瑾系列
SPOTLIGHT**
高流明 | 深防眩 | 高功率

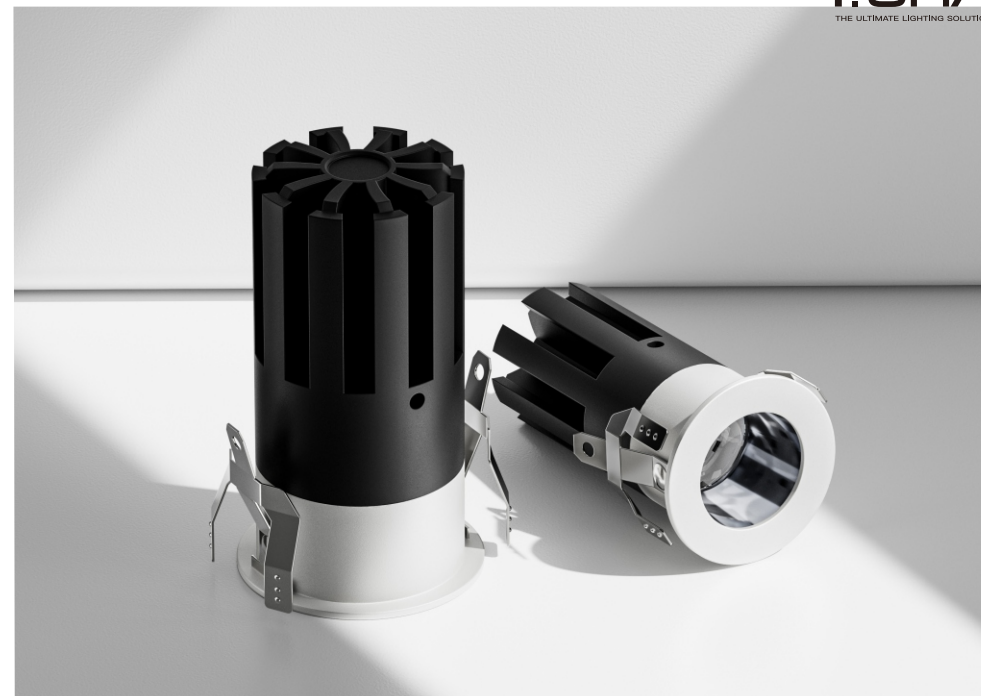

基本参数/Parameters

产品型号/Model	KX 3131 35-圆/Round
产品尺寸/Size (mm)	Φ40*76.5H
开孔尺寸/Cutout (mm)	Φ35
功率/Power (W)	7W
光学配置/Holder	1304
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters


产品型号/Model	KX 3131 45-圆/Round
产品尺寸/Size (mm)	Φ50*88.5H
开孔尺寸/Cutout (mm)	Φ45
功率/Power (W)	10W
光学配置/Holder	1304
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)






产品分解实物图
Product Breakdown Diagram

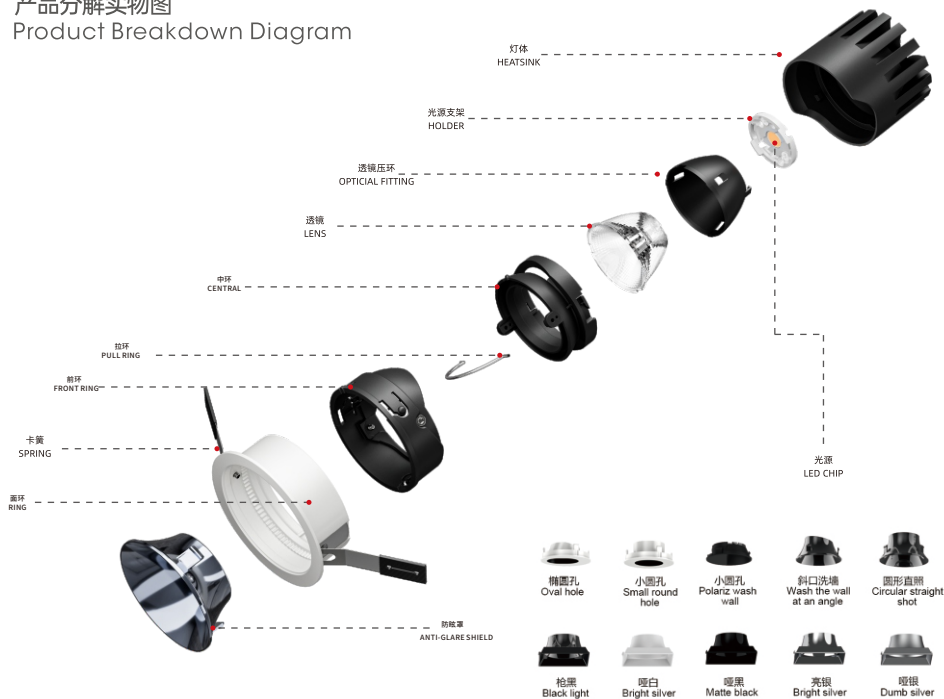

产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX 3131 55-圆/Round
产品尺寸/Size (mm)	φ62*106.5H
开孔尺寸/Cutout (mm)	φ55
功率/Power (W)	8-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°




基本参数/Parameters

产品型号/Model	KX 3131 75-圆/Round
产品尺寸/Size (mm)	φ82*88H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°



产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	KX 3131 75-圆/Round
产品尺寸/Size (mm)	φ82*115H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	15-20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°



产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX 3131 95-圆/Round
产品尺寸/Size (mm)	φ105*146H
开孔尺寸/Cutout (mm)	φ95
功率/Power (W)	20-30W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°



产品尺寸图/Dimension (mm)






基本参数/Parameters

产品型号/Model	KX 3131 55-方/Square
产品尺寸/Size (mm)	62*62*106.5H
开孔尺寸/Cutout (mm)	55*55
功率/Power (W)	8-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX 3131 110*55-方/Square
产品尺寸/Size (mm)	62*115.5*106.5H
开孔尺寸/Cutout (mm)	110*55
功率/Power (W)	10-12W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX 3131 75-方/Square
产品尺寸/Size (mm)	82*82*88H
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX 3131 150*75-方/Square
产品尺寸/Size (mm)	158*82*88H
开孔尺寸/Cutout (mm)	150*75
功率/Power (W)	10-12W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°


**KX 3131落瑾系列
SPOTLIGHT**
高流明 | 深防眩 | 高功率



基本参数/Parameters

产品型号/Model	KX3131 75-方/Square
产品尺寸/Size (mm)	82*82*115H
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	15-20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX3131 150*75-方/Square
产品尺寸/Size (mm)	82*158*115H
开孔尺寸/Cutout (mm)	150*75
功率/Power (W)	15-20W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX3131 95-方/Square
产品尺寸/Size (mm)	102.5*102.5*146H
开孔尺寸/Cutout (mm)	95*95
功率/Power (W)	20-30W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38° ☒ 50°


产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	KX3131 190*95-方/Square
产品尺寸/Size (mm)	197*5*102.5*146H
开孔尺寸/Cutout (mm)	190*95
功率/Power (W)	20-30W*2
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38° ☒ 50°

产品尺寸图/Dimension (mm)



安 装 效 果 图

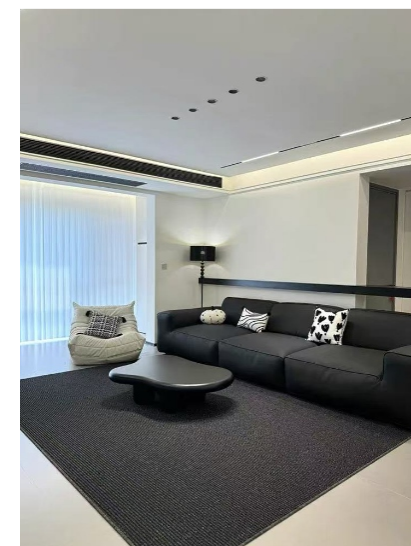

IP 54

AC 9292 依萌模组系列 SPOTLIGHT

圆窄边/Round Narrow Edge

圆宽边/Round Wide Edge

圆无边/Round Boundless

圆飞机翼无边/ Round Aircraft Wing Circle Without Edges

IP65防水模组/IP65 Waterproof Module



55防水模组
55 Waterproof Module

65防水模组
65 Waterproof Module

75防水模组
75 Waterproof Module

95防水模组
95 Waterproof Module

30°可调中环/30° Adjustable Front Ring



压铸铝/
Aluminium



PC



内设调节刻度/
Internally adjustable scale

面环款式/Face Ring Style



窄边弹夹款
Narrow Edge FMagazine style



宽边弹夹款
Wide Ring Magazine style



沉台款无边框
Sink style without borders



窄边弹片款
Narrow Edge Shrapnel style



宽边弹片款
Wide Ring Shrapnel style



飞机翼圆无边
Aircraft wing circle without edges

可选防眩反光杯/Anti-glare Cup Color Options

PC散防眩杯/ PC Anti Glare Cup



枪黑
Gun Black



亮银
Bright Silver



亚黑
Matte Black



亚白
Matte White



金色
Golden

铝合金款直面防眩杯/ Aluminum Alloy Straight Anti Glare Cup



枪黑
Gun Black



亮银
Bright Silver



亚黑
Matte Black



亚白
Matte White



金色
Golden

铝合金款弧面防眩杯/ Aluminum Alloy Curved Anti Glare Cup



枪黑
Gun Black



亮银
Bright Silver



亚黑
Matte Black



亚白
Matte White



金色
Golden

AC 9292 依萌系列 SPOTLIGHT


圆窄边/Round Narrow Edge

圆宽边/Round Wide Edge

圆无边/Round Boundless

圆飞机翼无边/Round Aircraft Wing Circle Without Edges

产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9292 55-圆/Round
产品尺寸/Size (mm)	Φ62*85H L92.5*85H
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	6-9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°



基本参数/Parameters

产品型号/Model	AC 9292 65-圆/Round
产品尺寸/Size (mm)	Φ72*89H L108*89H
开孔尺寸/Cutout (mm)	Φ65
功率/Power (W)	7-10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°



基本参数/Parameters

产品型号/Model	AC 9292 75-圆/Round
产品尺寸/Size (mm)	Φ82*98H L120*98H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°




基本参数/Parameters

产品型号/Model	AC 9292 95-圆/Round
产品尺寸/Size (mm)	Φ108*123H L160*123H
开孔尺寸/Cutout (mm)	Φ95
功率/Power (W)	20-25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°



产品尺寸图/Dimension (mm)



POLARIZED WALL WASH LAMP

偏光洗墙灯系列

AC 9293 光辉系列





面环款式 FACE RING STYLE



窄边弹夹款
Narrow Edge F Magazine style



窄边弹片款
Narrow Edge Shrapnel style



宽边弹夹款
Wide Ring Magazine style



宽边弹片款
Wide Ring Shrapnel style



沉台款无边框
Sink style without borders



飞机翼圆无边
Aircraft wing circle without edges



Ø55mm



Ø75mm



Ø95mm

POLARIZED WALL WASH LAMP


偏光洗墙灯系列

AC 9293 光辉系列

多样规格Diverse sizes:

天花开孔: 55/75/95mm

Ceiling openings cover 55/75/95mm



产品优势

PRODUCT ADVANTAGES

低眩光高光效:

Low glare and high luminous efficiency:

特殊设计自由曲面反光杯加防眩罩, 精准光路主动防眩, 出光效率高

Specially designed free-form curved surface reflector cup with anti-glare cover, precise light path active anti-glare, high light output efficiency

超强混旋光性能:

Super strong mixing and optical rotation performance:

独特微鳞甲格纹, 单色和双色温混光均匀

Unique micro-scale armor checkered pattern ensures uniform mixing of both single-color and dual-color temperatures

无暗区洗墙光斑:

No dark area wall cleaning light spot:

洗墙起始光斑与天花板顶端切齐, 全广角无暗区

The starting light spot for wall cleaning is aligned with the top of the ceiling

多盏拼接洗墙佳:

Multi-lamp spliced wall cleaning excellent:

可无缝拼接洗墙, 光斑均匀过渡, 无亮暗条纹

It can be seamlessly spliced for wall cleaning, with uniform light spot transition and no bright or dark stripes

材料更优:

Superior materials:

高耐温材料, 反光杯最高耐温140°C

High-temperature resistant materials, the reflector cup can withstand a maximum temperature of 140°C




基本参数/Parameters

产品型号/Model	AC 9293 55-圆/Round
产品尺寸/Size (mm)	Φ62*78H L92.5*78H Φ80*78H
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	6-9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白 /Matte White ■ 砂黑 /Matte Black



产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	AC 9293 75-圆/Round
产品尺寸/Size (mm)	Φ82*91H L130*91H Φ100*91H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	12-15W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白 /Matte White ■ 砂黑 /Matte Black



产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	AC 9292 95-圆/Round
产品尺寸/Size (mm)	Φ108*103H L160*103H Φ120*103H
开孔尺寸/Cutout (mm)	Φ95
功率/Power (W)	20-25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白 /Matte White ■ 砂黑 /Matte Black



产品尺寸图/Dimension (mm)



AC 9294 维影系列 SPOTLIGHT

圆窄边/Round Narrow Edge

圆宽边/Round Wide Edge

圆无边/Round Boundless

圆飞机翼无边/ Round Aircraft Wing Circle Without Edges



AC 9294 雉影系列 SPOTLIGHT

可选防眩反光杯/Anti-glare Cup Color Options

PC款防眩杯/PC Anti Glare Cup




铝合金款直面防眩杯
Aluminum Alloy Straight Anti Glare Cup



铝合金款弧面防眩杯
Aluminum Alloy Curved Anti Glare Cup



铝合金款弧面防眩杯/Aluminum Alloy Curved Anti Glare Cup

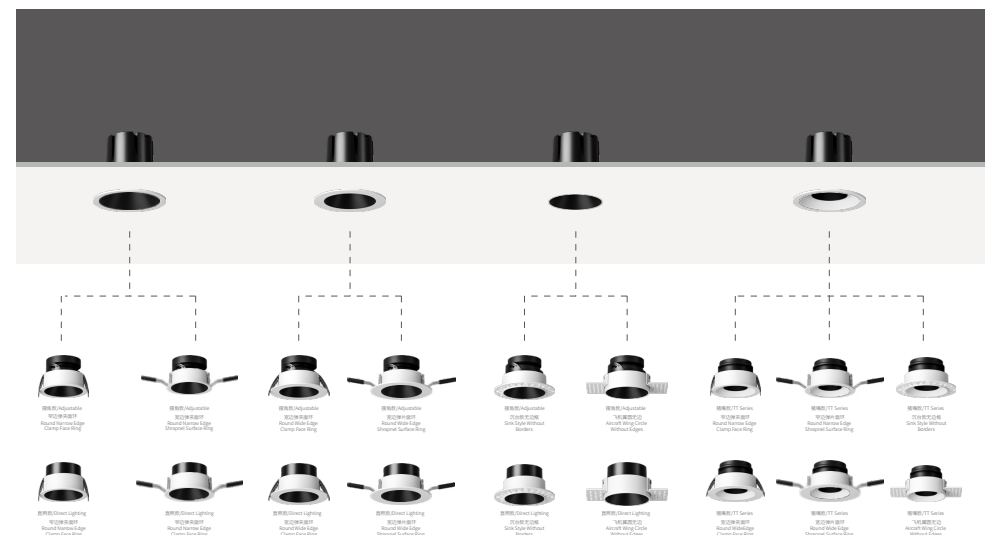



多层光学控光技术, UGR<5
Multi-layer optical light control technology, UGR < 5

品牌大透镜, 角度精准, 出光效率高
Brand large lens, precise angle, high light output efficiency.


旋转式榫卯连接设计, 安装便捷
Rotary tenon and mortise connection design, easy to install

最大30度摆角355度旋转灯体无阻碍, 自由控制出光角度
Maximum 30 degrees swing angle 355 degrees rotating lamp body unobstructed

PC/金属中环、金属防眩杯可选, 整灯工艺细腻
PC/metal front ring and anti-glare cup is optional

多种规格面环可选, 覆盖旧改场景
A variety of specifications are available, covering the old scene

产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9294 55- Round
产品尺寸/Size (mm)	ø62*85H L92.5*85H
开孔尺寸/Cutout (mm)	ø55
功率/Power (W)	6-9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°




基本参数/Parameters

产品型号/Model	AC 9294 55- Round
产品尺寸/Size (mm)	ø62*100H L92.5*100H
开孔尺寸/Cutout (mm)	ø55
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°



产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	AC 9292 65- Round
产品尺寸/Size (mm)	ø72*89H L108*89H
开孔尺寸/Cutout (mm)	ø65
功率/Power (W)	7-10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°



产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	AC 9292 75- Round
产品尺寸/Size (mm)	ø82*90H L130*90H
开孔尺寸/Cutout (mm)	ø75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°



产品尺寸图/Dimension (mm)






内外设有调节刻度/
Internally And Externally Equipped With Adjustable Scales



基本参数/Parameters

产品型号/Model	AC 9294 75-圆/Round
产品尺寸/Size (mm)	Φ82*120H L130*120H Φ100*120H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	15-20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°



产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9294 95-圆/Round
产品尺寸/Size (mm)	Φ82*122H L130*122H Φ100*122H
开孔尺寸/Cutout (mm)	Φ95
功率/Power (W)	20-25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°


产品尺寸图/Dimension (mm)

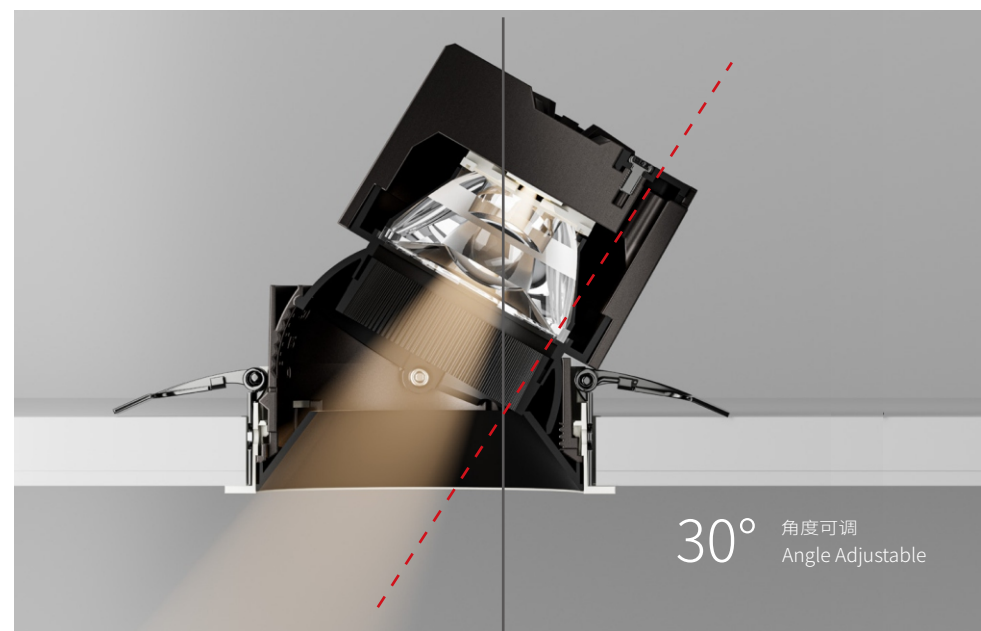

AC 9294 雒影系列 直照款/Direct Lighting

产品结构分析图

Product Structure Analysis Diagram

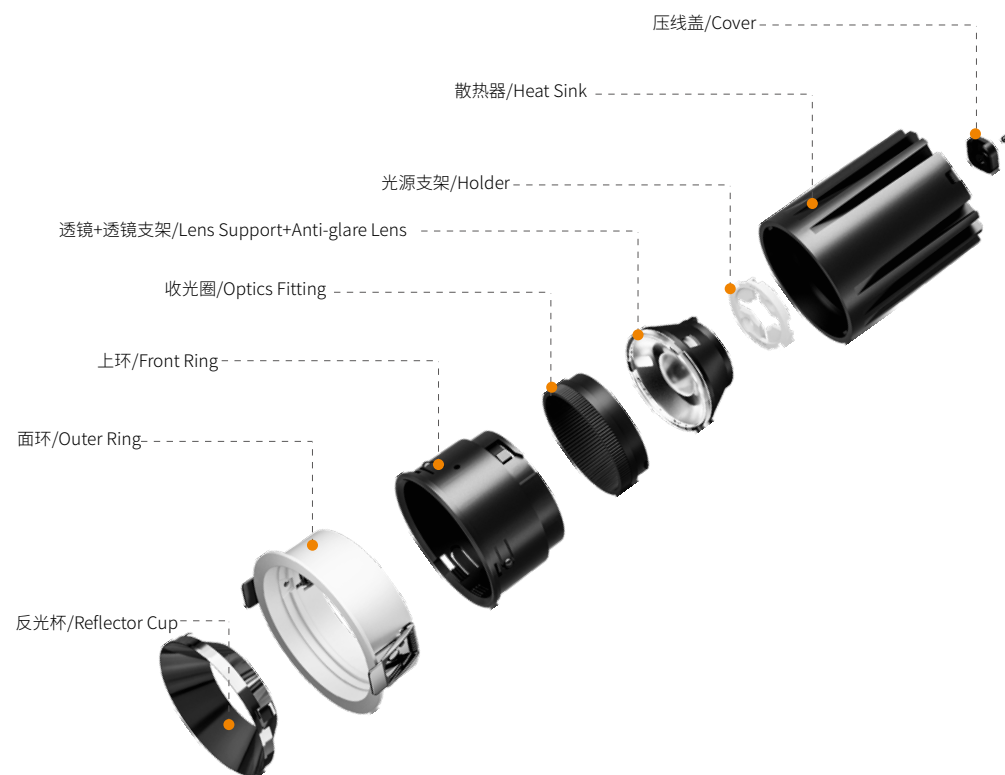

直照款/Direct Lighting

低眩光高光效:

Low glare and high luminous efficiency:

筒灯直照设计增加防眩罩, 精准光路主动防眩, 出光效率高

Sdirect illumination design of the downlight is enhanced with a glare shield.

The precise light path features active glare prevention, resulting in high light output efficiency






基本参数/Parameters

产品型号/Model	AC 9294 55-圓/Round	
产品尺寸/Size (mm)	ø62*81H L92.5*81H	ø75*81H ø80*81H
开孔尺寸/Cutout (mm)	ø55	
功率/Power (W)	6-9W	
光学配置/Holder	1304/1507/020	
防水等级/IP Level	IP 20	
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black	
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°	


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9294 55-圓/Round	
产品尺寸/Size (mm)	ø62*96H L92.5*96H	ø75*96H ø80*96H
开孔尺寸/Cutout (mm)	ø55	
功率/Power (W)	10-12W	
光学配置/Holder	1304/1507/020	
防水等级/IP Level	IP 20	
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black	
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°	


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9292 65-圓/Round	
产品尺寸/Size (mm)	ø72*82H L108*82H	ø85*82H ø90*82H
开孔尺寸/Cutout (mm)	ø65	
功率/Power (W)	7-10W	
光学配置/Holder	1304/1507/020	
防水等级/IP Level	IP 20	
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black	
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°	


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9292 75-圓/Round	
产品尺寸/Size (mm)	ø82*90H L130*90H	ø95*90H ø100*90H
开孔尺寸/Cutout (mm)	ø75	
功率/Power (W)	10-12W	
光学配置/Holder	1304/1507/020	
防水等级/IP Level	IP 20	
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black	
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°	


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9294 75-圓/Round	
产品尺寸/Size (mm)	ø82*114H L130*114H	ø95*114H ø100*114H
开孔尺寸/Cutout (mm)	ø75	
功率/Power (W)	15-20W	
光学配置/Holder	1304/1507/020	
防水等级/IP Level	IP 20	
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black	
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°	


产品尺寸图/Dimension (mm)



基本参数/Parameters


产品型号/Model	AC 9294 95-圓/Round	
产品尺寸/Size (mm)	ø82*112H L130*112H	ø95*112H ø100*112H
开孔尺寸/Cutout (mm)	ø95	
功率/Power (W)	20-25W	
光学配置/Holder	1507/020/030/1816	
防水等级/IP Level	IP 20	
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black	
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°	

产品尺寸图/Dimension (mm)



AC 9294 维影系列


镜前灯/小孔出光
Mirror Headlights / Small Hole Light Output

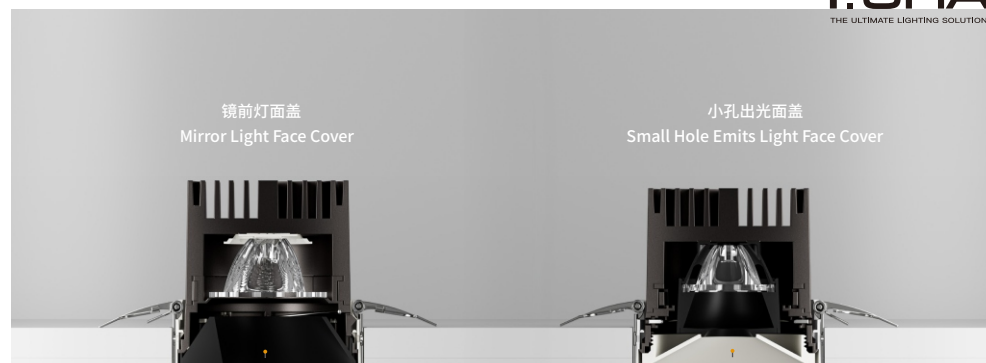

基本参数/Parameters

产品型号/Model	AC 9294 75-圆/Round
产品尺寸/Size (mm)	Φ82*68H Φ95*68H L130*87H Φ100*87H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	8-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° (朝人/At People) 35° (朝镜子/At Mirror)


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9294 75-圆/Round
产品尺寸/Size (mm)	Φ82*84H Φ95*84H L130*84H Φ100*84H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 36°

产品尺寸图/Dimension (mm)



AC 9294 雒影系列

猪嘴射灯/Pig Mouth Spotlight

产品结构分析图

Product Structure Analysis Diagram



猪嘴射灯/Pig Mouth Spotlight

光到之处 尽是焦点:

Wherever the light reaches, it creates a focal point:

猪嘴设计更加聚焦, 精准光束, 收口防眩, 出光效率高

The design of the pig's Mouth is more focused, with precise beams, a narrowing opening to prevent glare, and high light output efficiency





AC 9294 锥影系列
猪嘴射灯/Pig Mouth Spotlight



基本参数/Parameters

产品型号/Model	AC 9294 75-圆/Round	
产品尺寸/Size (mm)	Φ82*87H L130*90H	Φ95*87H Φ100*90H
开孔尺寸/Cutout (mm)	Φ75	
功率/Power (W)	8-12W	
光学配置/Holder	1304/1507/020	
防水等级/IP Level	IP 20	
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black	
光学角度/Beam Angle (°)	 15°  24°	



产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9294 75-圆/Round	
产品尺寸/Size (mm)	Φ82*117H L130*117H	Φ95*117H Φ100*117H
开孔尺寸/Cutout (mm)	Φ75	
功率/Power (W)	15-20W	
光学配置/Holder	1507/020/030/1816	
防水等级/IP Level	IP 20	
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black	
光学角度/Beam Angle (°)	 15°  24°	

产品尺寸图/Dimension (mm)



KX 3106 悦系列 SPOTLIGHT

高流明 | 深防眩 | 全角度 | 小灯体大瓦数 | DIY安装



贴面设计



极窄边框



深防眩高光效



超宽散热面积



超大功率



面环颜色 / Color



反射器可选颜色 / Reflector color optional



PC ELECTROPLATED VERSION

PC电镀款

**KX 3106 悦系列
SPOTLIGHT**

PC电镀45

功率(Power):	8W/12W
角度(beam angle):	10°/15°/24°/36°/55° (10°为光源贴片)
支架(Stents):	1304/020
备注(Remarks):	

PC电镀55

功率(Power):	10W/15W
角度(beam angle):	3°/5°/8°/15°/24°/36°/55° (3°/5°为光源贴片)
支架(Stents):	1304/1507
备注(Remarks):	

PC电镀65

功率(Power):	15W/20W
角度(beam angle):	10°/15°/24°/36°/55°
支架(Stents):	1304/1507
备注(Remarks):	

PC电镀75







功率(Power):	18W/28W
角度(beam angle):	3°/5°/8°/15°/24°/36°/55° (3°/5°为光源贴片)
支架(Stents):	1304/1507
备注(Remarks):	


PC电镀95

功率(Power):	30W/45W
角度(beam angle):	15°/24°/36°/55°
支架(Stents):	1507/1816/1919
备注(Remarks):	

PC电镀115

功率(Power):	60W/70W
角度(beam angle):	15°/24°/36°/55°
支架(Stents):	1507/1816/1919
备注(Remarks):	



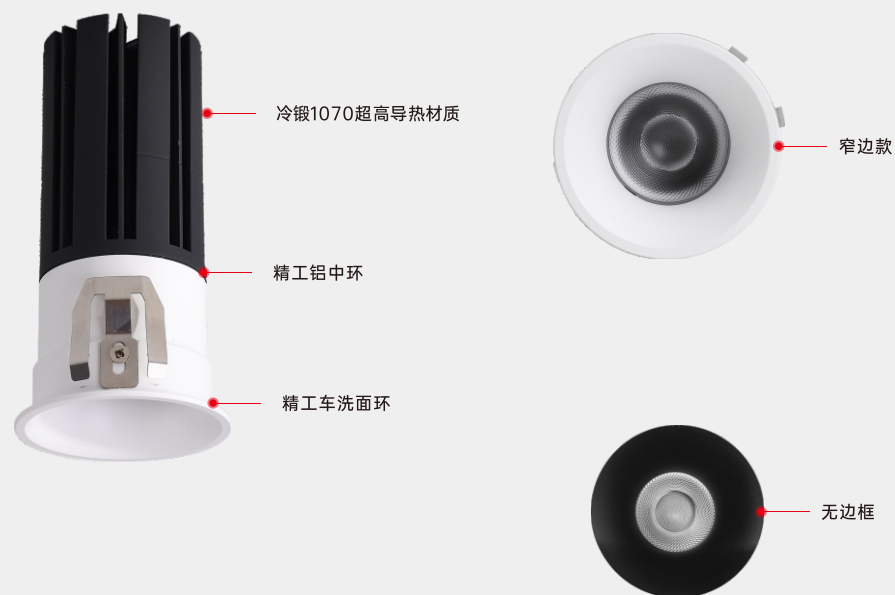

面环颜色 / Color



DIRECT LIGHTING MODEL

直照款

KX 3106 悦系列 SPOTLIGHT


直照35

功率(Power):	5W/9W
角度(beam angle):	15°/24°/36°
支架(Stents):	1304
备注(Remarks):	




直照40

功率(Power):	8W/12W
角度(beam angle):	10°/15°/24°/36°
支架(Stents):	1304
备注(Remarks):	




直照45

功率(Power):	8W/12W
角度(beam angle):	10°/15°/24°/36°
支架(Stents):	1304
备注(Remarks):	




直照50

功率(Power):	10W/15W
角度(beam angle):	3°/5°/8°/10°/15°/24°/36° (3°/5°为贴片光源)
支架(Stents):	1304/1507
备注(Remarks):	




直照55

功率(Power):	10W/15W
角度(beam angle):	3°/5°/8°/10°/15°/24°/36° (3°/5°为贴片光源)
支架(Stents):	1304/1507
备注(Remarks):	




直照60



功率(Power):	15W/20W
角度(beam angle):	10°/15°/24°/36°
支架(Stents):	1304/1507
备注(Remarks):	



直照65

功率(Power):	15W/20W
角度(beam angle):	10°/15°/24°/36°
支架(Stents):	1304/1507
备注(Remarks):	



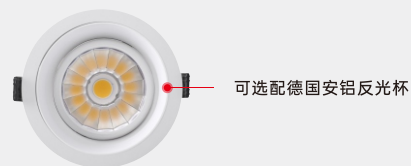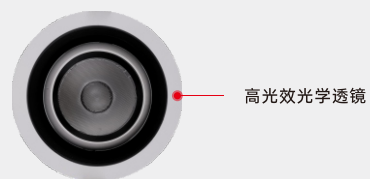

面环颜色 / Color




BULL EYED CEILING LAMP

牛眼天花灯

KX 3122 悦系列
SPOTLIGHT


牛眼天花75

功率(Power):	18W / 28W
角度(beam angle):	3°/5°/8°/10°/15°/24°/36°/55°(3°/5°为光源贴片)
支架(Stents):	1507/010
备注(Remarks):	





牛眼天花95

功率(Power):	35W / 45W
角度(beam angle):	15°/24°/36°/55°
支架(Stents):	1507 / 1816 / 1919
备注(Remarks):	



牛眼天花115

功率(Power):	60W / 70W
角度(beam angle):	15°/24°/36°/55°
支架(Stents):	1507 / 1816 / 1919
备注(Remarks):	

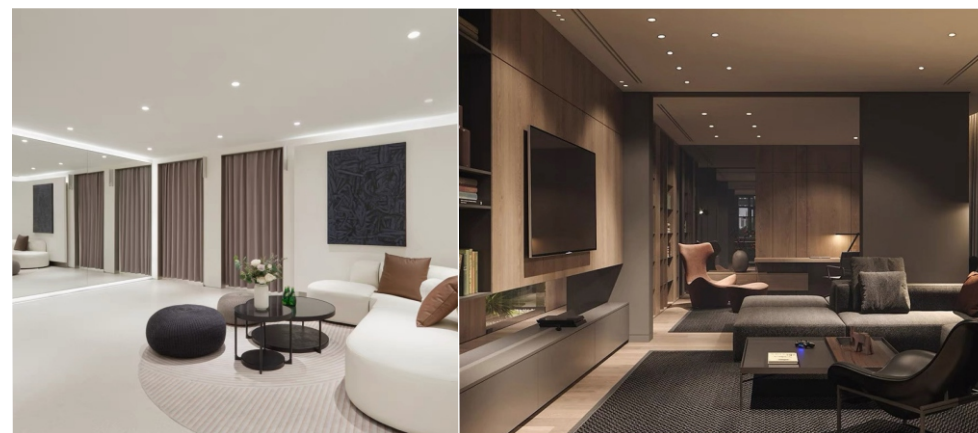



AC 9268 洛伊系列

深防眩 | 高功率 | 防水防雾
Deep anti-glare | High power

UGR<9 IP 44




基本参数/Parameters

产品型号/Model	AC 9268 55-圆/Round
产品尺寸/Size (mm)	Φ65*94H
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	7-8W
光学配置/Holder	1304
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°



产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	AC 9268 75-圆/Round
产品尺寸/Size (mm)	Φ85*98H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°



产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	AC 9268 75-圆/Round
产品尺寸/Size (mm)	Φ85*98H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	15W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°



产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	AC 9268 95-圆/Round
产品尺寸/Size (mm)	Φ1105*113H
开孔尺寸/Cutout (mm)	Φ95
功率/Power (W)	15-18W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°



产品尺寸图/Dimension (mm)



AC 9268 洛伊系列

深防眩 | 高功率 | 防水防雾
Deep anti-glare | High power

UGR<9 **IP 44**



Face ring 面环



圆形
round face
ring



圆形预埋
round trimless
face ring



方形
Square single
head face ring



方形预埋
square single head
trimless face ring



方形双头
square double
head face ring



方形双头预埋
Square double head
trimless face ring

Reflective cup 光杯



玫瑰金
Rose-gold



铬色
Chrome



枪黑
Chrome-black



雾银
Fog-silver



哑白
Matt-white



哑黑
Matt-black



椭圆
Oval Matte white



小圆孔
Round Matte white



偏光杯
Polarizing Cup

Optical Accessories 光学配件



A-蜂窝网
Honeycomb filter



B-拉伸片
Linear



C-单偏片
Single asymmetric



D-双偏片
Double asymmetric

AC 9351 SPOTLIGHT

深防眩 | 高功率 | 小灯体大瓦数

Deep anti-glare | High power | Small lamp body with large wattage


UGR<9



基本参数/Parameters

产品型号/Model	AC 9351 55-圆/Round
产品尺寸/Size (mm)	Φ62*100H
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	12W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9351 75-圆/Round
产品尺寸/Size (mm)	Φ83*105H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	18W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9351 95-圆/Round
产品尺寸/Size (mm)	Φ105*120H
开孔尺寸/Cutout (mm)	Φ95
功率/Power (W)	25W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°

产品尺寸图/Dimension (mm)



Φ55



Φ75





Φ95

光束角 Beam angle :



产品尺寸图/Dimension (mm)

开孔/Cutout
RD:φ75 SQ:75*75





基本参数/Parameters

产品型号/Model	KX 3132 75-圆/Round & 方/Square
产品尺寸/Size (mm)	φ85*59H 85*85*59
开孔尺寸/Cutout (mm)	φ75 75*75
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
150*75





基本参数/Parameters

产品型号/Model	KX 3132 75*150-方/Square
产品尺寸/Size (mm)	L162.5*85*59H
开孔尺寸/Cutout (mm)	L150*75
功率/Power (W)	12W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD:φ55 SQ:55*55





基本参数/Parameters

产品型号/Model	KX 3132 55-圆/Round & 方/Square
产品尺寸/Size (mm)	φ62.5*51H 62.5*62.5*51H
开孔尺寸/Cutout (mm)	φ55 55*55
功率/Power (W)	8W
光学配置/Holder	1304/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ95





基本参数/Parameters

产品型号/Model	KX 3132 95-圆/Round & 方/Square
产品尺寸/Size (mm)	φ105*73H 105*105*73H
开孔尺寸/Cutout (mm)	φ95
功率/Power (W)	20W
光学配置/Holder	1507/020/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L110*55





基本参数/Parameters

产品型号/Model	KX 3132 55*110-方/Square
产品尺寸/Size (mm)	L118.5*62.5*51H
开孔尺寸/Cutout (mm)	L110*55
功率/Power (W)	8W*2
光学配置/Holder	1304/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°


产品尺寸图/Dimension (mm)

开孔/Cutout
L190*95



基本参数/Parameters

产品型号/Model	KX 3132 95*190-方/Square
产品尺寸/Size (mm)	L201.2*105*73H
开孔尺寸/Cutout (mm)	L190*95
功率/Power (W)	20W*2
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

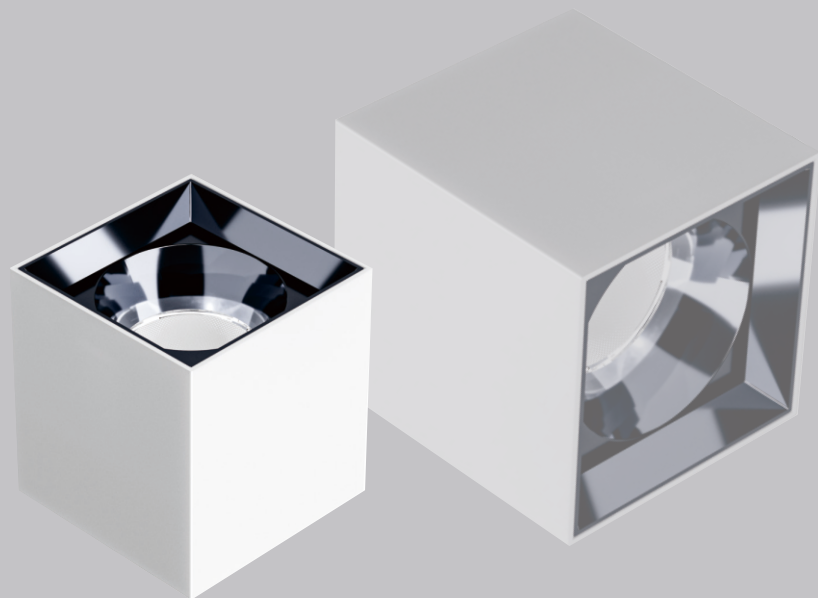

卡扣的弹片固定 高效拆装方便维修
免去拧螺丝刮伤天花板
The snap-on spring clips are fixed, which enables efficient disassembly and assembly and convenient maintenance, eliminating the need to screw in screws and scratch the ceiling.

多种不同颜色的防眩罩，根据不同场景需求匹配
Anti-glare covers of various colors, matched according to the requirements of different scenarios.

防眩罩颜色/Anti-glare hood color:



明装筒灯 金属保险绳 多重防护 安全有保障
Surface-mounted downlight with metal safety rope, multiple protections, and guaranteed safety



基本参数/Parameters

产品型号/Model	KX 3132 圆/Round Surface
产品尺寸/Size (mm)	Φ72*78H
开孔尺寸/Cutout (mm)	Surface
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38° ☒ 50°

产品尺寸图/Dimension (mm)

Surface



基本参数/Parameters

产品型号/Model	KX 3132 圆/Round Surface
产品尺寸/Size (mm)	Φ94*95H
开孔尺寸/Cutout (mm)	Surface
功率/Power (W)	20W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38° ☒ 50°

产品尺寸图/Dimension (mm)

Surface




基本参数/Parameters

产品型号/Model	KX 3132 方/Square Surface
产品尺寸/Size (mm)	72*72*78H
开孔尺寸/Cutout (mm)	Surface
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38° ☒ 50°

产品尺寸图/Dimension (mm)

Surface




基本参数/Parameters

产品型号/Model	KX 3132 91*91-方/Square Surface
产品尺寸/Size (mm)	91*91*95H
开孔尺寸/Cutout (mm)	Surface
功率/Power (W)	20W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38° ☒ 50°

产品尺寸图/Dimension (mm)

Surface





KX 3050 i.BEI 筒灯系列

KX 3050 i.BEI Downlight Series

多种面环设计，满足不同场所应用需求

Multiple face ring designs are available to meet the application requirements of different places


基本参数/Parameters

产品型号/Model	KX 3050-A 75-圆/Round
产品尺寸/Size (mm)	Φ88*55H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°




产品尺寸图/Dimension (mm)

开孔/Cutout
Φ75




基本参数/Parameters

产品型号/Model	KX 3050-B 75-圆/Round
产品尺寸/Size (mm)	Φ88*55H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☒ 38° ☐ 50°



产品尺寸图/Dimension (mm)

开孔/Cutout
Φ55




基本参数/Parameters

产品型号/Model	KX 3050-C 75-圆/Round
产品尺寸/Size (mm)	Φ88*55H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☒ 38° ☐ 50°



产品尺寸图/Dimension (mm)

开孔/Cutout
Φ75




基本参数/Parameters

产品型号/Model	KX 3050-D 75-圆/Round
产品尺寸/Size (mm)	Φ88*55H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☒ 38° ☐ 50°



产品尺寸图/Dimension (mm)


开孔/Cutout
Φ75





KX 3062 高光效筒灯系列

KX 3062 High-Efficiency Downlight Series

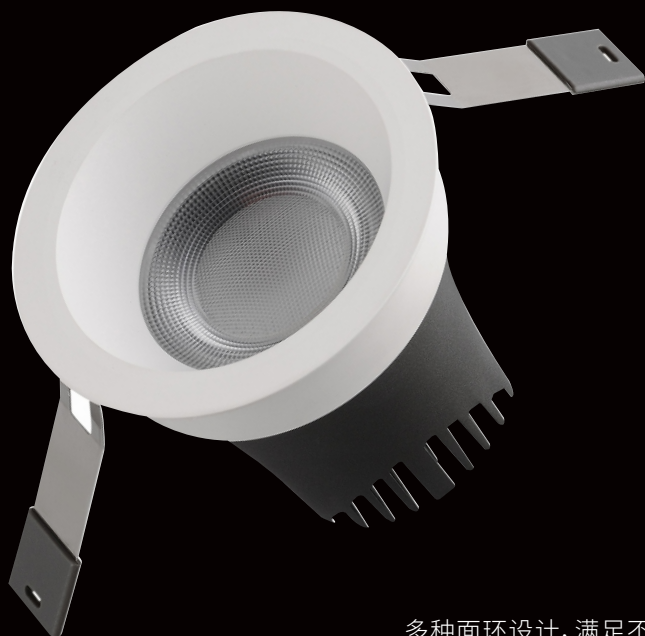

多种面环设计，满足不同场所应用需求
Multiple face ring designs are available to meet the application requirements of different places




基本参数/Parameters

产品型号/Model	KX 3062 75-圆/Round
产品尺寸/Size (mm)	Φ82*72H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black

光学角度/Beam Angle (°)  50°

产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	KX 3062 55-圆/Round
产品尺寸/Size (mm)	Φ61*50H
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black

光学角度/Beam Angle (°)  15° 24° 38° 50°

产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	KX 3062 75-圆/Round
产品尺寸/Size (mm)	Φ81*70H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black

光学角度/Beam Angle (°)  15° 24° 38° 50°

产品尺寸图/Dimension (mm)






基本参数/Parameters

产品型号/Model	KX 3062 55-圆/Round
产品尺寸/Size (mm)	Φ61*50H
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD: Φ55




基本参数/Parameters

产品型号/Model	KX 3062 75-圆/Round
产品尺寸/Size (mm)	Φ81*71H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD: Φ75



KX 3062 高光效筒灯系列 KX 3062 High-Efficiency Downlight Series




I.SHA
THE ULTIMATE LIGHTING SOLUTION

I.SHA
THE ULTIMATE LIGHTING SOLUTION

产品尺寸图/Dimension (mm)

开孔/Cutout
φ55



基本参数/Parameters

产品型号/Model KX 3062 55-圆/Round

产品尺寸/Size (mm) φ61*50H

开孔尺寸/Cutout (mm) φ55

功率/Power (W) 5W

光学配置/Holder 1304/1507/020

防水等级/IP Level IP 20

面环颜色/Color
□ 砂白/Matte White
■ 砂黑/Matte Black

光学角度/Beam Angle (°)
24° 38°

基本参数/Parameters

产品型号/Model KX 3062 75-圆/Round

产品尺寸/Size (mm) φ81*71H

开孔尺寸/Cutout (mm) φ75

功率/Power (W) 10W

光学配置/Holder 1304/1507/020

防水等级/IP Level IP 20

面环颜色/Color
□ 砂白/Matte White
■ 砂黑/Matte Black

光学角度/Beam Angle (°)
24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ55



基本参数/Parameters

产品型号/Model KX 3062 55-圆/Round

产品尺寸/Size (mm) φ61*50H

开孔尺寸/Cutout (mm) φ55

功率/Power (W) 5W

光学配置/Holder 1304/1507/020


防水等级/IP Level IP 20

面环颜色/Color
□ 砂白/Matte White
■ 砂黑/Matte Black

光学角度/Beam Angle (°)
15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD: φ55



基本参数/Parameters

产品型号/Model KX 3062 75-圆/Round

产品尺寸/Size (mm) φ81*71H

开孔尺寸/Cutout (mm) φ75

功率/Power (W) 10W

光学配置/Holder 1304/1507/020


防水等级/IP Level IP 20

面环颜色/Color
□ 砂白/Matte White
■ 砂黑/Matte Black

光学角度/Beam Angle (°)
15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD: φ75



Related Products

Recessed



西郎德 小圆孔透镜

Syllande Small circular hole lens

小圆孔交叉出光, 光束更聚光, 更有层次感

The small round holes cross out light, making the beam more focused and giving it a more layered effect



KX 3036-C series



KX 3036-A series

Related Products

Recessed



西郎德 小圆孔透镜 Syllande Small circular hole lens

小圆孔交叉出光, 光束更聚光, 更有层次感

The small round holes cross out light, making the beam more focused and giving it a more layered effect



基本参数/Parameters

产品型号/Model	KX 3036 45-圆/Round
产品尺寸/Size (mm)	φ52*40H φ52*52H
开孔尺寸/Cutout (mm)	φ45
功率/Power (W)	5W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 24° ☒ 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ45



基本参数/Parameters

产品型号/Model	KX 3036 55-圆/Round
产品尺寸/Size (mm)	φ62*54H φ62*62H
开孔尺寸/Cutout (mm)	φ55
功率/Power (W)	9W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 24° ☒ 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ55



基本参数/Parameters

产品型号/Model	KX 3036 65-圆/Round
产品尺寸/Size (mm)	φ73*60H φ73*80H
开孔尺寸/Cutout (mm)	φ65
功率/Power (W)	12W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 24° ☒ 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ65



基本参数/Parameters

产品型号/Model	KX 3036 75-圆/Round
产品尺寸/Size (mm)	φ83*65H φ83*90H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	18W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 24° ☒ 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ75





携手格锐光学 深筒防眩杯

Collaborate with Grei Optics for Deep Tube Anti-glare Cup



基本参数/Parameters

产品型号/Model	KX 3036-D 45-圆/Round
产品尺寸/Size (mm)	φ52*40H
开孔尺寸/Cutout (mm)	φ45
功率/Power (W)	5W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ45



基本参数/Parameters

产品型号/Model	KX 3036-D 55-圆/Round
产品尺寸/Size (mm)	φ62*54H
开孔尺寸/Cutout (mm)	φ55
功率/Power (W)	9W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ55



基本参数/Parameters

产品型号/Model	KX 3036-D 65-圆/Round
产品尺寸/Size (mm)	φ73*60H
开孔尺寸/Cutout (mm)	φ65
功率/Power (W)	12W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ65



基本参数/Parameters

产品型号/Model	KX 3036-D 75-圆/Round
产品尺寸/Size (mm)	φ83*65H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	18W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ75





KX 3036 D Series



产品尺寸图/Dimension (mm)

开孔/Cutout
φ45



基本参数/Parameters

产品型号/Model	KX 3036-B 45-圆/Round
产品尺寸/Size (mm)	φ52*52H
开孔尺寸/Cutout (mm)	φ45
功率/Power (W)	5W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°



基本参数/Parameters

产品型号/Model	KX 3036-B 55-圆/Round
产品尺寸/Size (mm)	φ62*62H
开孔尺寸/Cutout (mm)	φ55
功率/Power (W)	9W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ55



基本参数/Parameters

产品型号/Model	KX 3036-B 65-圆/Round
产品尺寸/Size (mm)	φ73*80H
开孔尺寸/Cutout (mm)	φ65
功率/Power (W)	12W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ65



基本参数/Parameters

产品型号/Model	KX 3036-B 75-圆/Round
产品尺寸/Size (mm)	φ83*90H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	18W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ75






AC 9345-A 系列

AC 9345 Downlight Series

基本参数/Parameters

产品型号/Model	AC 9345-A 35-圆/Round
产品尺寸/Size (mm)	Φ40*47H
开孔尺寸/Cutout (mm)	Φ35
功率/Power (W)	3W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38°

产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9345-A 45-圆/Round
产品尺寸/Size (mm)	Φ50*55H
开孔尺寸/Cutout (mm)	Φ45
功率/Power (W)	6W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38°


产品尺寸图/Dimension (mm)




基本参数/Parameters


产品型号/Model	AC 9345-A 55-圆/Round
产品尺寸/Size (mm)	Φ60*60H
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38°

产品尺寸图/Dimension (mm)






φ35



φ45




φ55



基本参数/Parameters

产品型号/Model	AC 9345-B 35-圆/Round
产品尺寸/Size (mm)	Φ40*47H
开孔尺寸/Cutout (mm)	Φ35
功率/Power (W)	3W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	 15°  24°  38°

产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9345-B 45-圆/Round
产品尺寸/Size (mm)	Φ50*55H
开孔尺寸/Cutout (mm)	Φ45
功率/Power (W)	6W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	 15°  24°  38°

产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9345-B 55-圆/Round
产品尺寸/Size (mm)	Φ60*57H
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	 15°  24°  38°

产品尺寸图/Dimension (mm)



AC 9345-C 系列

AC 9345-C Downlight Series



基本参数/Parameters

产品型号/Model	AC 9345-C 35-圆/Round
产品尺寸/Size (mm)	Φ40*47H
开孔尺寸/Cutout (mm)	Φ35
功率/Power (W)	3W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	  24° 38°

产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9345-C 45-圆/Round
产品尺寸/Size (mm)	Φ50*55H
开孔尺寸/Cutout (mm)	Φ35
功率/Power (W)	6W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	  24° 38°

产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9345-C 55-圆/Round
产品尺寸/Size (mm)	Φ60*57H
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	  24° 38°

产品尺寸图/Dimension (mm)





Cut-Size(mm): 45*45 45*90 45*125
AC 9345-D Series




基本参数/Parameters

产品型号/Model	AC 9345-D 方/Square
产品尺寸/Size (mm)	54*49*52H
开孔尺寸/Cutout (mm)	45*45
功率/Power (W)	3W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☐ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
45*45




基本参数/Parameters

产品型号/Model	AC 9345-D 方/Square
产品尺寸/Size (mm)	94*49*52H
开孔尺寸/Cutout (mm)	45*90
功率/Power (W)	6W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☐ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
45*90




基本参数/Parameters

产品型号/Model	AC 9345-D 方/Square
产品尺寸/Size (mm)	134*49*52H
开孔尺寸/Cutout (mm)	45*125
功率/Power (W)	9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☐ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°


产品尺寸图/Dimension (mm)

开孔/Cutout
45*125



AC 9346 系列

AC 9346 Downlight Series

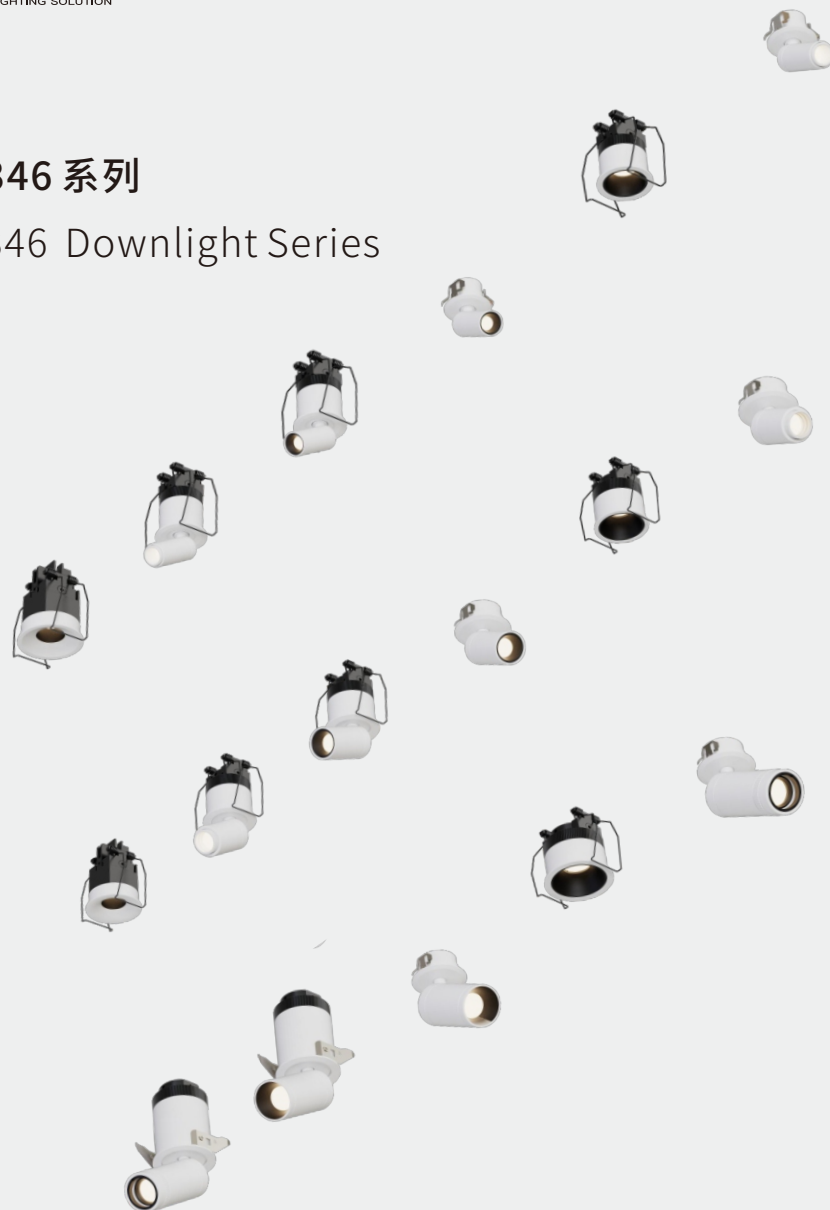


迷你小射灯设计, 固定直照/嵌入式/半嵌入/调焦等, 满足不同场景需求

Mini spotlight design, with fixed direct lighting, embedded, semi-embedded, and adjustable focus options, to meet the needs of various scenarios.

基本参数/Parameters

产品型号/Model	AC 9346 35-圆/Round
产品尺寸/Size (mm)	Φ38*61H
开孔尺寸/Cutout (mm)	Φ35
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9346 25-圆/Round
产品尺寸/Size (mm)	Φ29*48H
开孔尺寸/Cutout (mm)	Φ25
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9346 30-圆/Round
产品尺寸/Size (mm)	Φ33*51H
开孔尺寸/Cutout (mm)	Φ30
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9346 40-圆/Round
产品尺寸/Size (mm)	Φ43*53H
开孔尺寸/Cutout (mm)	Φ40
功率/Power (W)	5W
光学配置/Holder	SMD 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)






基本参数/Parameters

产品型号/Model	AC 9346 25-圆/Round
产品尺寸/Size (mm)	Φ29*60H Φ25*H48
开孔尺寸/Cutout (mm)	Φ25 Φ20
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9346 25-圆/Round
产品尺寸/Size (mm)	Φ29*60H Φ25*H48
开孔尺寸/Cutout (mm)	Φ25 Φ20
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 40° Focus:15°-40°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9346 30-圆/Round
产品尺寸/Size (mm)	Φ35*70H Φ35*56
开孔尺寸/Cutout (mm)	Φ30 Φ30
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38° ☒ 50°


产品尺寸图/Dimension (mm)

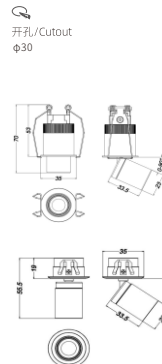

基本参数/Parameters

产品型号/Model	AC 9346 30-圆/Round
产品尺寸/Size (mm)	Φ35*70H Φ35*56
开孔尺寸/Cutout (mm)	Φ30 Φ30
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 40° Focus:15°-40°


产品尺寸图/Dimension (mm)

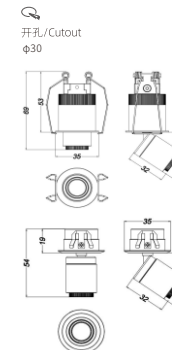

基本参数/Parameters

产品型号/Model	AC 9346 40-圆/Round
产品尺寸/Size (mm)	Φ43*78H Φ35*H74
开孔尺寸/Cutout (mm)	Φ40 Φ30
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9346 40-圆/Round
产品尺寸/Size (mm)	Φ43*78H Φ35*H74
开孔尺寸/Cutout (mm)	Φ40 Φ30
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 40° Focus:15°-40°

产品尺寸图/Dimension (mm)



光束角变化15°-40°

The beam angle changes by 15°-40° degrees.

自由变焦, 既可聚光也可散光, 拉长, 光斑变小, 缩短光斑变大


Free zooming, it can both focus and defocus. When zooming in, the light spot becomes smaller; when zooming out, the light spot becomes larger



基本参数/Parameters

产品型号/Model	AC 9346 35-圆/Round
产品尺寸/Size (mm)	Φ38*40H
开孔尺寸/Cutout (mm)	Φ35
功率/Power (W)	3W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9346 45-圆/Round
产品尺寸/Size (mm)	Φ48*47H
开孔尺寸/Cutout (mm)	Φ45
功率/Power (W)	3W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°

产品尺寸图/Dimension (mm)




多重防眩-专业级光学设计,让光环境更舒适

Multiple anti-glare

Professional optical design makes the light environment more comfortable



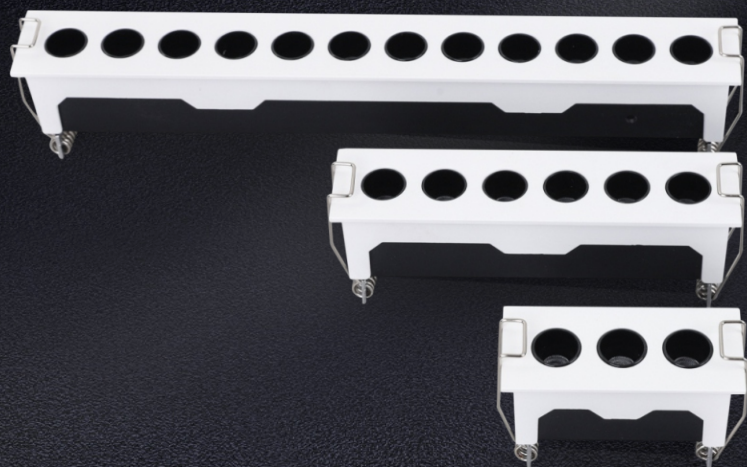

Embedded grid spotlights (linear spotlights)

Die-cast aluminum radiator 2-hole, 6-hole, 12-hole


The lamp cup is usually paired with a deep anti-glare optical structure, providing soft and non-dazzling light to enhance the comfort of the space. It can be flexibly selected according to the size of the space and the lighting requirements



基本参数/Parameters

产品型号/Model	IS 3302 方/square
产品尺寸/Size (mm)	L73*32*50H
开孔尺寸/Cutout (mm)	L68*25
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 30° ☐ 45°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	IS 3302 方/square
产品尺寸/Size (mm)	L133*32*50H
开孔尺寸/Cutout (mm)	L128*25
功率/Power (W)	2W*6
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 30° ☐ 45°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	IS 3302 方/square
产品尺寸/Size (mm)	L253*32*50H
开孔尺寸/Cutout (mm)	L248*25
功率/Power (W)	2W*12
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°

产品尺寸图/Dimension (mm)





光源深藏设计避免光源刺眼
The design of the light source is concealed to prevent it from being too bright and causing discomfort


光学透镜-透光均匀, 无光斑
Optical lens - Uniform light transmission, no light spots

黑光防眩罩-有效的吸收杂光深藏防眩
Black light anti-glare hood - Effectively absorbs stray light and deeply conceals the anti-glare feature

采用格锐反光杯-出光均匀, 光线柔和
Use the GR reflective cup - the light is evenly distributed and the illumination is soft

产品尺寸图/Dimension (mm)

开孔/Cutout
L38*38



基本参数/Parameters


产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L45*45*50H
开孔尺寸/Cutout (mm)	L38*38
功率/Power (W)	2W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☒ 30° ☐ 45°

基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L75*45*50H
开孔尺寸/Cutout (mm)	L68*38
功率/Power (W)	2W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☒ 30° ☐ 45°

产品尺寸图/Dimension (mm)

开孔/Cutout
L68*38




基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L94*45*40H
开孔尺寸/Cutout (mm)	L86*38
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☒ 24° ☐ 38° ☐ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L86*38




基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L148*45*50H
开孔尺寸/Cutout (mm)	L138*38
功率/Power (W)	2W*5
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☒ 24° ☐ 38° ☐ 50°

产品尺寸图/Dimension (mm)


开孔/Cutout
L138*38





产品尺寸图/Dimension (mm)

开孔/Cutout
L162*38



基本参数/Parameters

产品型号/Model IS 3300 方/square
产品尺寸/Size (mm) L173*45*40H
开孔尺寸/Cutout (mm) L162*38
功率/Power (W) 2W*6
光学配置/Holder CREE XPE
防水等级/IP Level IP 20
面环颜色/Color ☐ 砂白/Matte White
☒ 砂黑/Matte Black

光学角度/Beam Angle (°) 15° 30° 45°


基本参数/Parameters

产品型号/Model IS 3300 方/square
产品尺寸/Size (mm) L279*45*50H
开孔尺寸/Cutout (mm) L128*25
功率/Power (W) 2W*10
光学配置/Holder CREE XPE
防水等级/IP Level IP 20
面环颜色/Color ☐ 砂白/Matte White
☒ 砂黑/Matte Black

光学角度/Beam Angle (°) 15° 30° 45°

产品尺寸图/Dimension (mm)

开孔/Cutout
L272*38




基本参数/Parameters

产品型号/Model IS 3300 方/square
产品尺寸/Size (mm) L332*45*40H
开孔尺寸/Cutout (mm) L325*38
功率/Power (W) 2W*12
光学配置/Holder CREE XPE
防水等级/IP Level IP 20
面环颜色/Color ☐ 砂白/Matte White
☒ 砂黑/Matte Black

光学角度/Beam Angle (°) 15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L325*38






基本参数/Parameters


产品型号/Model IS 3300 方/square
产品尺寸/Size (mm) L411*45*50H
开孔尺寸/Cutout (mm) L403*38
功率/Power (W) 2W*15
光学配置/Holder CREE XPE
防水等级/IP Level IP 20
面环颜色/Color ☐ 砂白/Matte White
☒ 砂黑/Matte Black

光学角度/Beam Angle (°) 15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L403*38

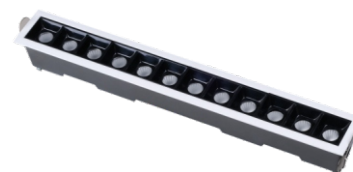

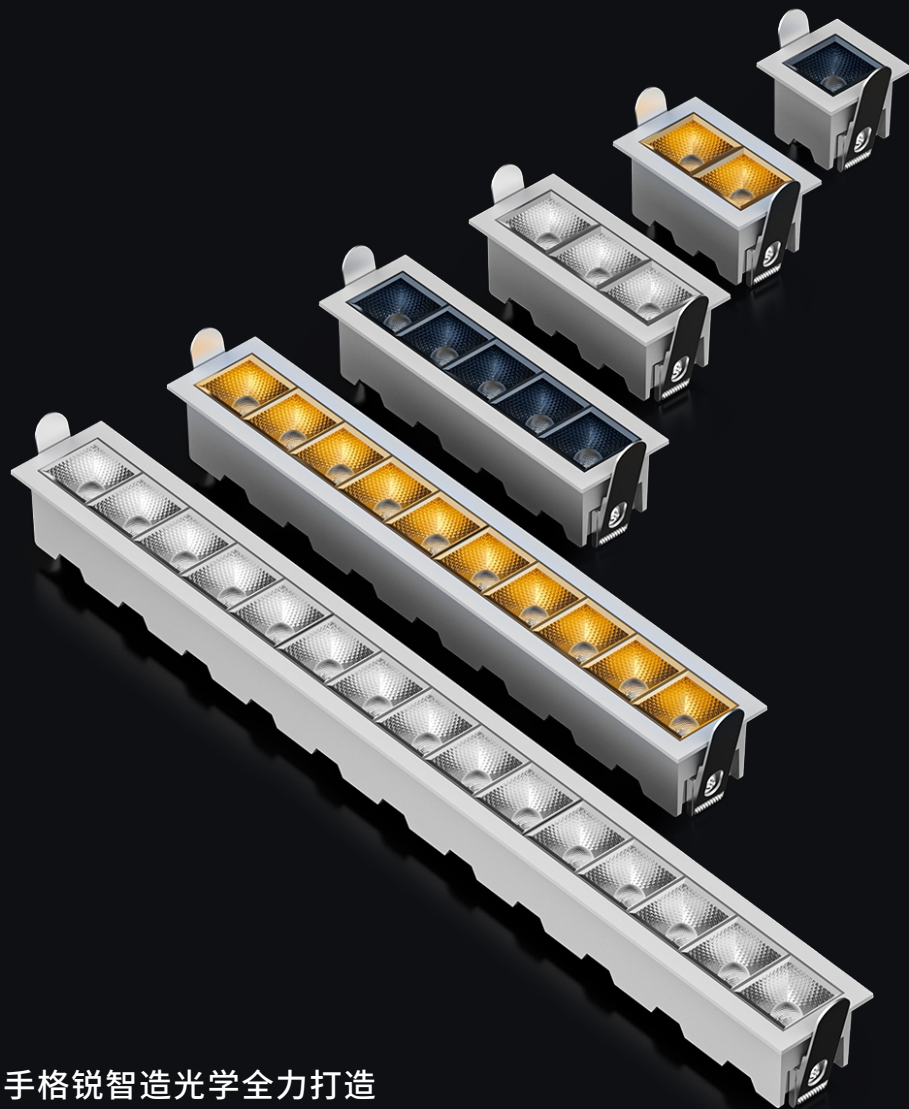

携手格锐智造光学全力打造


Jointly build with GR Intelligent Optics

50°80°大发光角度-发光效率高,每瓦可达160流明

50°, 80° - Wide viewing angle, High luminous efficiency,
with up to 160 lumens per watt

产品尺寸图/Dimension (mm)

开孔/Cutout
L35*36



基本参数/Parameters


产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L45*46*53H
开孔尺寸/Cutout (mm)	L35*36
功率/Power (W)	2W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 50° ☒ 80°

基本参数/Parameters

产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L75*46*53H
开孔尺寸/Cutout (mm)	L65*36
功率/Power (W)	2W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 50° ☒ 80°

产品尺寸图/Dimension (mm)

开孔/Cutout
L65*36




基本参数/Parameters

产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L105*46*53H
开孔尺寸/Cutout (mm)	L95*36
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 50° ☒ 80°

产品尺寸图/Dimension (mm)

开孔/Cutout
L96*36




基本参数/Parameters

产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L155*46*53H
开孔尺寸/Cutout (mm)	L145*36
功率/Power (W)	2W*5
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 50° ☒ 80°

产品尺寸图/Dimension (mm)

开孔/Cutout
L145*36



携手格锐智造光学全力打造
Jointly build with GR Intelligent Optics

50°80°大发光角度
50°, 80° - Wide viewing angle

发光效率高, 每瓦可达160流明
High luminous efficiency, with up to 160 lumens per watt

IP 54

基本参数/Parameters

产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L295*46*53H
开孔尺寸/Cutout (mm)	L128*25
功率/Power (W)	2W*10
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 50° ☒ 80°

产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L435*46*53H
开孔尺寸/Cutout (mm)	L425*36
功率/Power (W)	2W*15
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 50° ☒ 80°


产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L147*45*50H
开孔尺寸/Cutout (mm)	L138*38
功率/Power (W)	2W*5
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 54
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 38°

产品尺寸图/Dimension (mm)



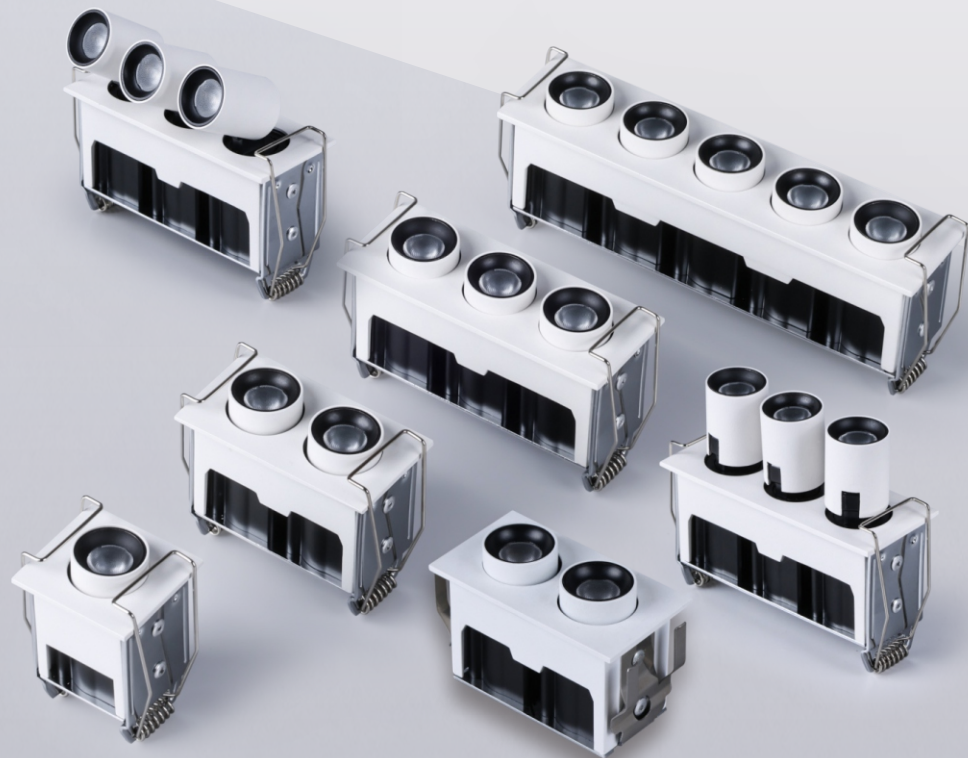


基本参数/Parameters

产品型号/Model	IS 3306 方/square
产品尺寸/Size (mm)	L43*40*43H
开孔尺寸/Cutout (mm)	L40*35
功率/Power (W)	2W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L40*35




基本参数/Parameters

产品型号/Model	IS 3306 方/square
产品尺寸/Size (mm)	L72*40*43H
开孔尺寸/Cutout (mm)	L68*35
功率/Power (W)	2W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L68*35




基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L100*40*43H
开孔尺寸/Cutout (mm)	L96*35
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L96*35





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L162*40*43H
开孔尺寸/Cutout (mm)	L156*35
功率/Power (W)	2W*5
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°


产品尺寸图/Dimension (mm)

开孔/Cutout
L156*35



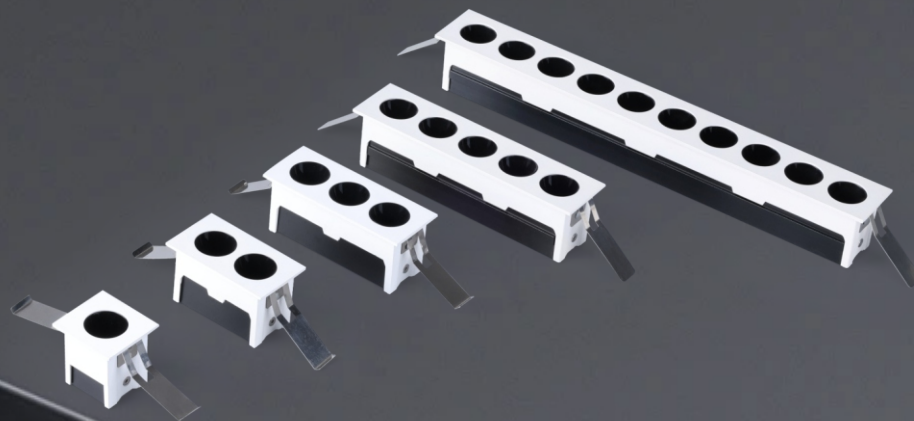

2种弹片安装
Installation of two types of shrapnel




基本参数/Parameters

产品型号/Model	AC9178 方/square
产品尺寸/Size (mm)	L40*43*42H
开孔尺寸/Cutout (mm)	L40*35
功率/Power (W)	2W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☒ 30° ☐ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L40*35




基本参数/Parameters

产品型号/Model	AC9178 方/square
产品尺寸/Size (mm)	L72*40*42H
开孔尺寸/Cutout (mm)	L70*35
功率/Power (W)	2W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☒ 30° ☐ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L72*35




基本参数/Parameters

产品型号/Model	AC9178 方/square
产品尺寸/Size (mm)	L100*40*42H
开孔尺寸/Cutout (mm)	L98*35
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☒ 30° ☐ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L98*35




基本参数/Parameters

产品型号/Model	IS3300 方/square
产品尺寸/Size (mm)	L162*40*42H
开孔尺寸/Cutout (mm)	L158*35
功率/Power (W)	2W*5
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☒ 30° ☐ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L158*35





基本参数/Parameters

产品型号/Model	AC9178 方/square
产品尺寸/Size (mm)	L312*40*42H
开孔尺寸/Cutout (mm)	L308*35
功率/Power (W)	2W*10
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☒ 30° ☐ 50°

产品尺寸图/Dimension (mm)


开孔/Cutout
L308*35



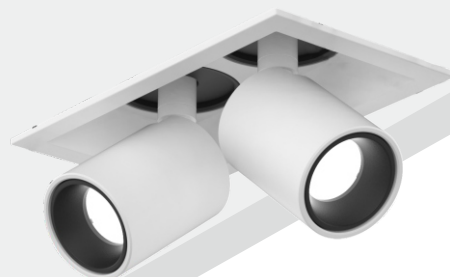

AC 9348 Grille series


Multiple combination designs, adjustable to 350° rotation and 90° irradiation



基本参数/Parameters

产品型号/Model	AC 9348 Line light 方/square
产品尺寸/Size (mm)	L70.5*32*48H
开孔尺寸/Cutout (mm)	L63*25
功率/Power (W)	2W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38° ☒ 50°



产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9348 Line light 方/square
产品尺寸/Size (mm)	L127.5*32*48H
开孔尺寸/Cutout (mm)	L120*25
功率/Power (W)	2W*4
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38° ☒ 50°


产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9348 Line light 方/square
产品尺寸/Size (mm)	L245*32*48H
开孔尺寸/Cutout (mm)	L240*25
功率/Power (W)	2W*8
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 38° ☒ 50°

产品尺寸图/Dimension (mm)




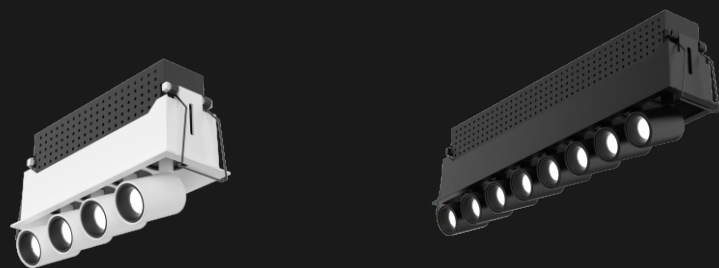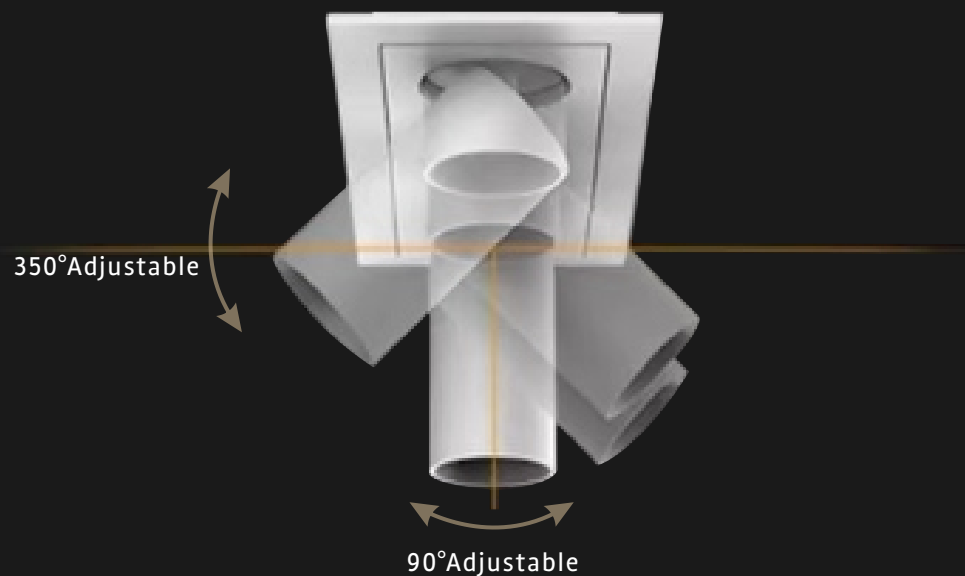

基本参数/Parameters

产品型号/Model	AC 9348 Line light 方/square
产品尺寸/Size (mm)	L85*46*63H
开孔尺寸/Cutout (mm)	L78*35
功率/Power (W)	3W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9348 Line light 方/square
产品尺寸/Size (mm)	L141.5*46*63H
开孔尺寸/Cutout (mm)	L135*38
功率/Power (W)	3W*4
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°


产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	AC 9348 Line light 方/square
产品尺寸/Size (mm)	L259*46*63H
开孔尺寸/Cutout (mm)	L252*38
功率/Power (W)	3W*8
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 50°

产品尺寸图/Dimension (mm)



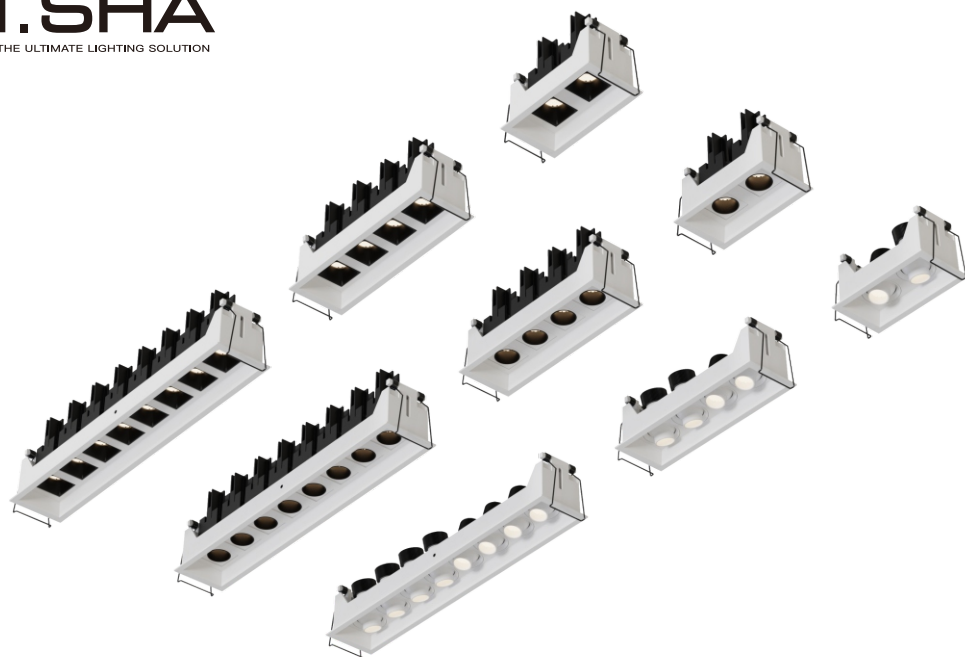


AC 9352 Grille series



square-Anti-glare cup

方形防眩光设计：黑色格栅与光学透镜组合，可大幅减少光线直射刺眼问题，提升视觉舒适度
Square anti-glare design: A combination of black grille and optical lens can significantly reduce the problem of direct light being too bright, thereby enhancing visual comfort.



Round-Anti-glare cup


圆形防眩杯设计：黑色防眩杯配合深杯结构，通过物理遮光和光学处理，能有效切断杂散光，防眩效果 (UGR 值) 通常可低于 16，适合对视觉舒适度要求高的空间
Circular anti-glare cup design: The black anti-glare cup is combined with a deep cup structure. Through physical shading and optical processing, it can effectively block stray light, and the anti-glare effect (UGR value) is usually below 16, suitable for spaces with high requirements for visual comfort



Round-Anti-glare bucket

360° 旋转灯头：采用深桶式遮光设计，灯头可实现水平 360° 旋转 + 垂直角度调节，能精准对准任意需要照明的区域，适配复杂空间的照明需求

360° Rotating Lamp Cap: With a deep bucket-shaped light-shielding design, the lamp cap can achieve 360° horizontal rotation + vertical angle adjustment. It can precisely target any area requiring lighting and meets the lighting needs of complex spaces.

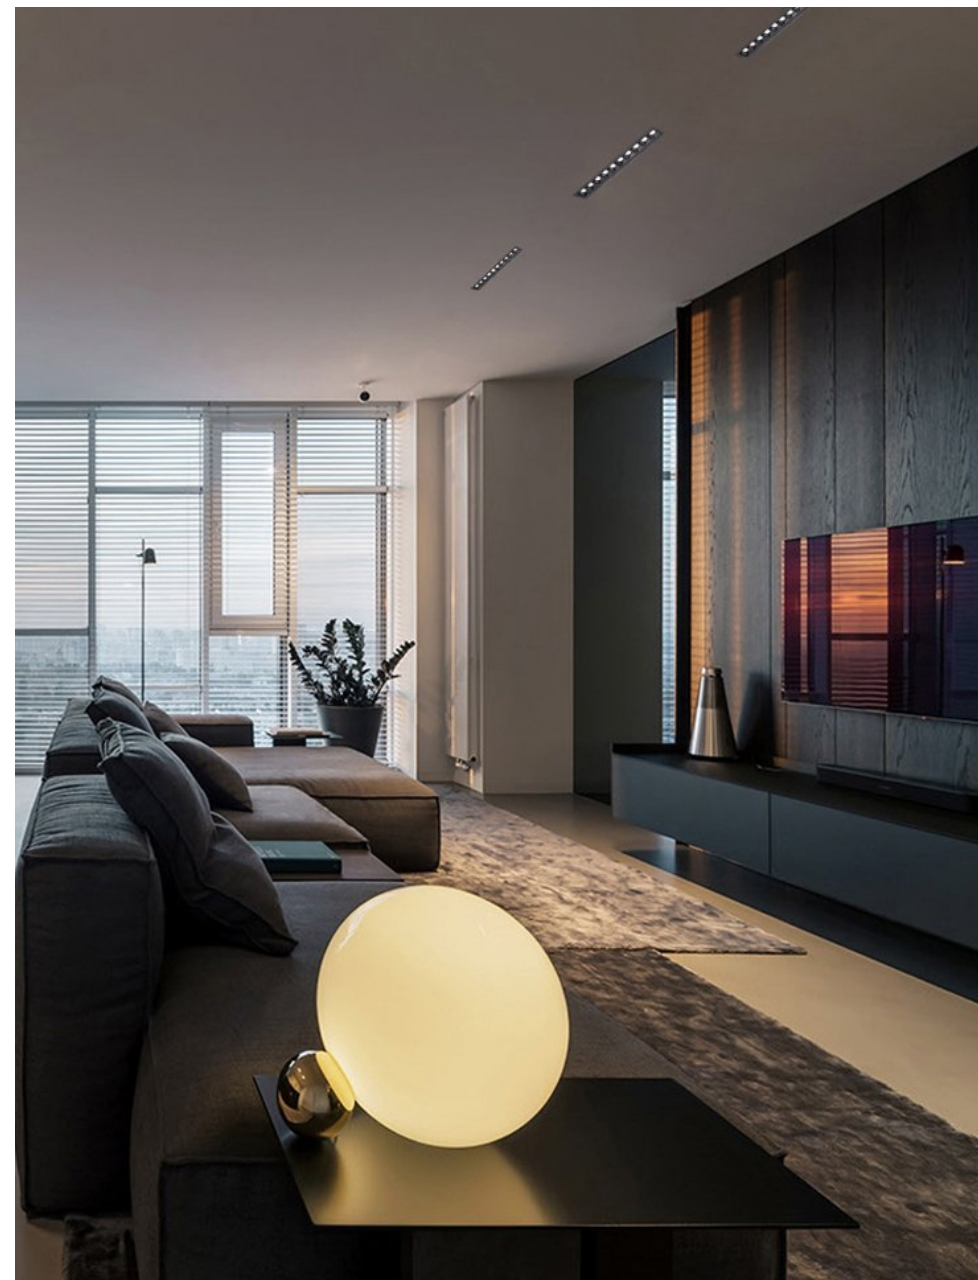




AC 9349 Grille series

AC 9352 Series

Round-Anti-glare cup

&

square-Anti-glare cup






基本参数/Parameters

产品型号/Model	AC 9352 Line light 方/square
产品尺寸/Size (mm)	L85*46*65H
开孔尺寸/Cutout (mm)	L78*38
功率/Power (W)	3W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L78*38





基本参数/Parameters

产品型号/Model	AC 9352 Line light 方/square
产品尺寸/Size (mm)	L142*46*65H
开孔尺寸/Cutout (mm)	L135*38
功率/Power (W)	3W*4
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L135*38



基本参数/Parameters

产品型号/Model	AC 9352 Line light 方/square
产品尺寸/Size (mm)	L259*46*66H
开孔尺寸/Cutout (mm)	L252*38
功率/Power (W)	3W*8
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L252*38





360°旋转灯头，灵活照明局部重点区域
360° rotatable lamp head, flexible lighting for local key areas

灯头可实现水平 360° 旋转 + 0-20° 左右调节，能精准对准任意需要照明的区域，适配复杂空间的照明需求


The lamp head can rotate horizontally 360° and adjust up and down by 0-20°, precisely targeting any area that requires illumination and meeting the lighting needs of complex spaces.



基本参数/Parameters

产品型号/Model	AC 9352 Line light 方/square
产品尺寸/Size (mm)	L85*46*46H
开孔尺寸/Cutout (mm)	L78*38
功率/Power (W)	3W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9352 Line light 方/square
产品尺寸/Size (mm)	L142*46*46H
开孔尺寸/Cutout (mm)	L135*38
功率/Power (W)	3W*4
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9352 Line light 方/square
产品尺寸/Size (mm)	L259*46*46H
开孔尺寸/Cutout (mm)	L252*38
功率/Power (W)	3W*8
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°


产品尺寸图/Dimension (mm)





A-圓孔光学款

A - Circular Hole Optical Style

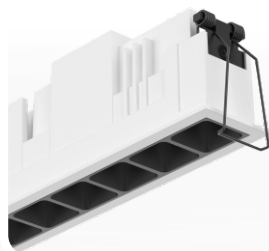

B-方孔光学款

B - Square Hole Optical Model



C-高光效光学款

C - High-efficiency Optical Model



基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L31.5*31.5*H55
开孔尺寸/Cutout (mm)	L25*25
功率/Power (W)	2W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L25*25




基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L53.5*31.5*H55
开孔尺寸/Cutout (mm)	L47*25
功率/Power (W)	2W*2
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L47*25




基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L75*31.5*H55
开孔尺寸/Cutout (mm)	L69*25
功率/Power (W)	2W*3
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L69*25





基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L96.5*31.5*H55
开孔尺寸/Cutout (mm)	L90*25
功率/Power (W)	2W*4
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L90*25



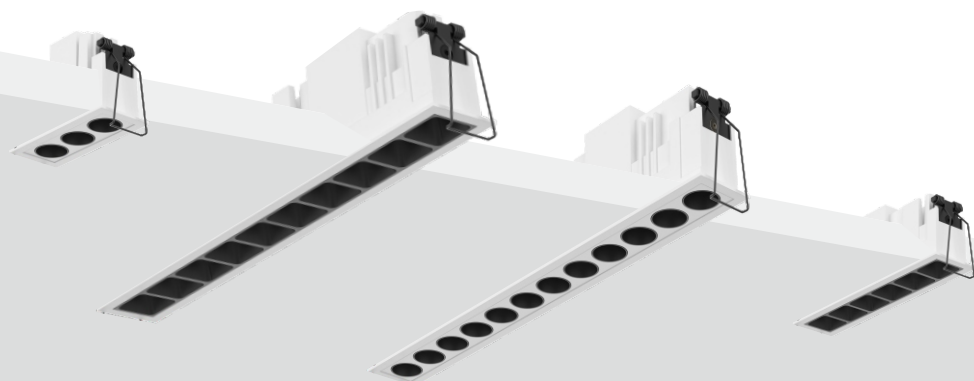

灯体外壳:采用高导热压铸铝,
承载内部组件并辅助散热,保障灯具寿命

Lamp body housing: Made of high thermal conductivity
die-cast aluminum, it supports the internal components and
assists in heat dissipation, ensuring the lifespan of the lamp

CREE 3535 芯片
LED Chip CREE 3535

光学模组:包含防眩光格栅 / 雷迪克透镜,
控制光线角度,将眩光值 (UGR) 控制在 19 以下,
提升视觉舒适度

Optical module: Includes anti-glare grille / Radic lens,
which controls the angle of light and keeps the glare
value (UGR) below 19, thereby enhancing visual comfort.




基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L118.5*31.5*H55
开孔尺寸/Cutout (mm)	L112*25
功率/Power (W)	2W*5
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L112*25





基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L140*31.5*H55
开孔尺寸/Cutout (mm)	L133*25
功率/Power (W)	2W*6
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L133*25





基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L226.5*31.5*H55
开孔尺寸/Cutout (mm)	L222*25
功率/Power (W)	2W*10
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L222*25




基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L269.5*31.5*H55
开孔尺寸/Cutout (mm)	L263*25
功率/Power (W)	2W*12
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L263*25





C-高光效光学款

C - High-efficiency Optical Model




基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	75*31.5*H55
开孔尺寸/Cutout (mm)	L69*25
功率/Power (W)	3W*3
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☐ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 30° ☐ 40°

产品尺寸图/Dimension (mm)

开孔/Cutout
L69*25





基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L118.5*31.5*H55
开孔尺寸/Cutout (mm)	L112*25
功率/Power (W)	3W*5
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☐ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 30° ☐ 40°

产品尺寸图/Dimension (mm)

开孔/Cutout
L112*25

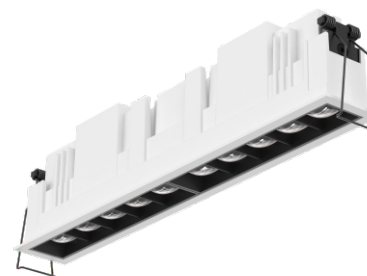



基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L226.5*31.5*H55
开孔尺寸/Cutout (mm)	L222*25
功率/Power (W)	3W*10
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☐ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 30° ☐ 40°


产品尺寸图/Dimension (mm)

开孔/Cutout
L222*25



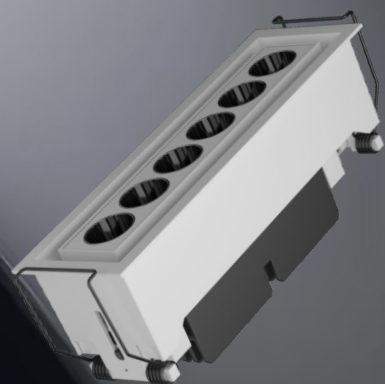


25°Adjustable

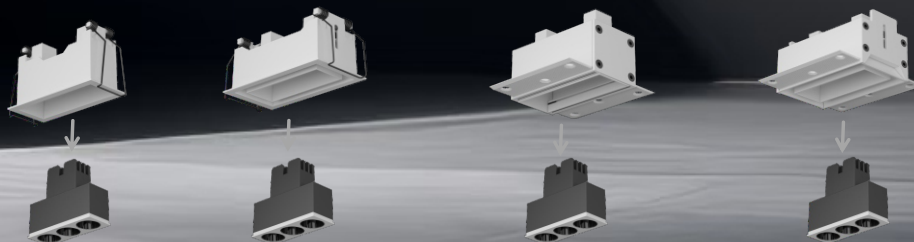

基本参数/Parameters

产品型号/Model	AC 9347 Line light 方/square
产品尺寸/Size (mm)	L85*46*H58 L76*80*H59
开孔尺寸/Cutout (mm)	L78*38 L78*45
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☐ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°



产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9347 Line light 方/square
产品尺寸/Size (mm)	L142*46*H58 L133*80*H59
开孔尺寸/Cutout (mm)	L135*38 L135*45
功率/Power (W)	2W*6
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☐ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°


产品尺寸图/Dimension (mm)

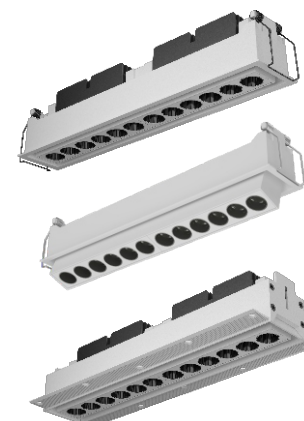

基本参数/Parameters

产品型号/Model	AC 9347 Line light 方/square
产品尺寸/Size (mm)	L259*46*H58 L251*80*H59
开孔尺寸/Cutout (mm)	L252*38 L253*45
功率/Power (W)	2W*12
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☐ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°


产品尺寸图/Dimension (mm)



AC 9347 Grille series

全面升级, 功能更强大

Comprehensive upgrade, with more powerful functions

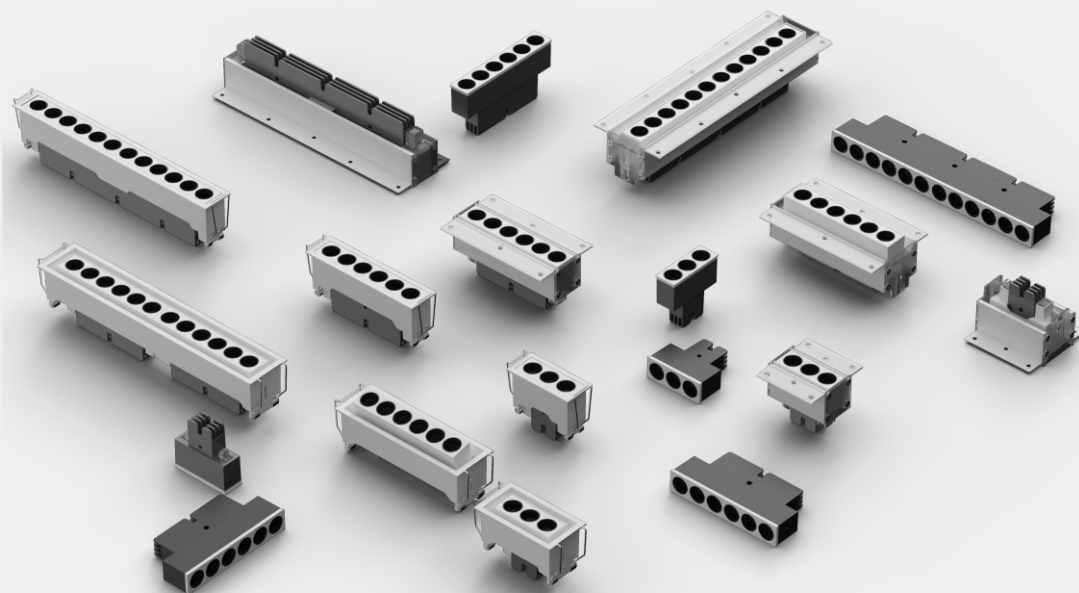

全面升级精巧体积与其灵活的模组设计与自由调节功能, 有边款, 无边框,
灯头调节, 精准满足多样化空间的照明需求



Comprehensive upgrade in terms of the exquisite size, its flexible module design
and adjustable functions. With bezels, without borders, lamp head adjustment,
precisely meeting the lighting needs of various spaces.



基本参数/Parameters

产品型号/Model	AC 9347 Line light 方/square
产品尺寸/Size (mm)	L70*32*H58 L65*70*H58
开孔尺寸/Cutout (mm)	L63*25 L67*35
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☐ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°



产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9347 Line light 方/square
产品尺寸/Size (mm)	L127*32*H58 L122*70*H58
开孔尺寸/Cutout (mm)	L120*25 L124*35
功率/Power (W)	2W*6
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☐ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°


产品尺寸图/Dimension (mm)

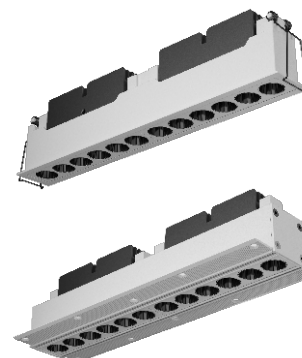

基本参数/Parameters

产品型号/Model	AC 9347 Line light 方/square
产品尺寸/Size (mm)	L245*32*H58 L239*70*H58
开孔尺寸/Cutout (mm)	L240*25 L241*35
功率/Power (W)	2W*12
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☐ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 50°

产品尺寸图/Dimension (mm)




KX 3140 系列防水筒灯


WATERPROFOF SERIES



一体式高效散热，前置式防水设计
INTEGRATED EFFICIENT HEAT DISSIPATION,
FRONT WATERPROOF DESIGN

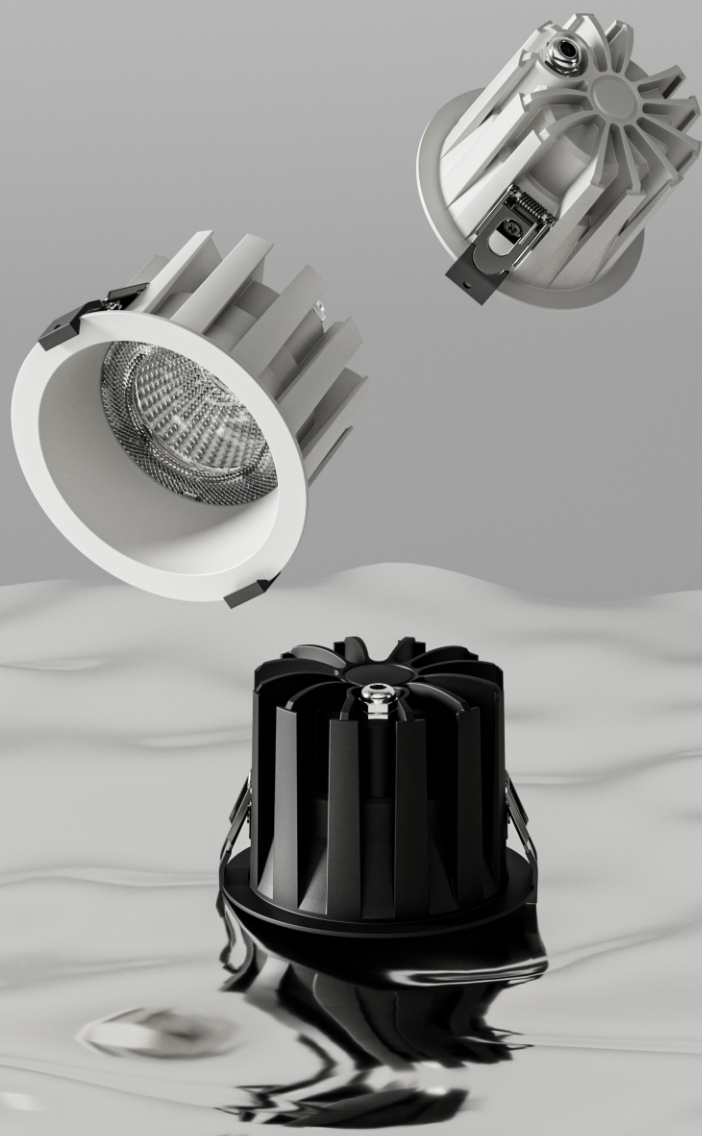

产品分解实物图
Product Breakdown Diagram

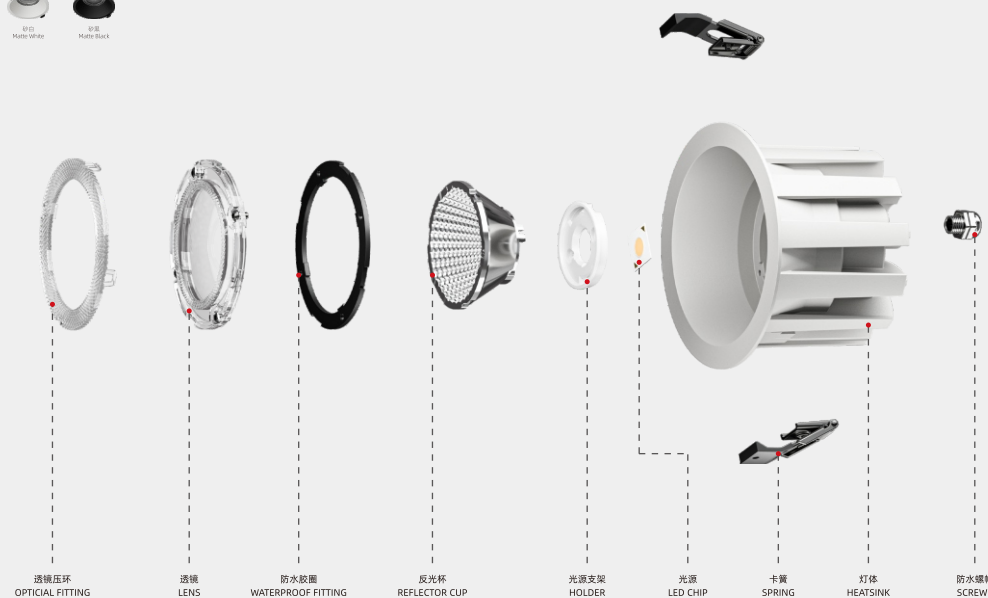


75mm



基本参数/Parameters

产品型号/Model	KX 3140 75-圆/Round
产品尺寸/Size (mm)	φ86*65H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	12W
光学配置/Holder	1304/1507/020 /030/1816
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	    15° 24° 38° 60°

产品尺寸图/Dimension (mm)




145mm




基本参数/Parameters

产品型号/Model	KX 3140 145-圆/Round
产品尺寸/Size (mm)	φ160*90H
开孔尺寸/Cutout (mm)	φ145
功率/Power (W)	35-40W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	    15° 24° 38° 60°

产品尺寸图/Dimension (mm)




95mm



基本参数/Parameters

产品型号/Model	KX 3140 95-圆/Round
产品尺寸/Size (mm)	φ108*77H
开孔尺寸/Cutout (mm)	φ95
功率/Power (W)	20W
光学配置/Holder	1304/1507/020 /030/1816
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	    15° 24° 38° 60°

产品尺寸图/Dimension (mm)




165mm



基本参数/Parameters

产品型号/Model	KX 3140 165-圆/Round
产品尺寸/Size (mm)	φ180*109H
开孔尺寸/Cutout (mm)	φ165
功率/Power (W)	40-45W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	    15° 24° 38° 60°

产品尺寸图/Dimension (mm)




125mm



基本参数/Parameters

产品型号/Model	KX 3140 125-圆/Round
产品尺寸/Size (mm)	φ140*88H
开孔尺寸/Cutout (mm)	φ125
功率/Power (W)	30W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	    15° 24° 38° 60°

产品尺寸图/Dimension (mm)




200mm



基本参数/Parameters

产品型号/Model	KX 3140 200-圆/Round
产品尺寸/Size (mm)	φ220*125.5H
开孔尺寸/Cutout (mm)	φ200
功率/Power (W)	50-55W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	    15° 24° 38° 60°

产品尺寸图/Dimension (mm)






哑白 哑黑 白+黑 白+银

AC 9161 悦系列 DOWNLIGHT

高流明 | 防眩目 | 防水防雾





基本参数/Parameters

产品型号/Model	AC 9161 75-圆/Round
产品尺寸/Size (mm)	Φ83*65H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ75




基本参数/Parameters

产品型号/Model	AC 9161 95-圆/Round
产品尺寸/Size (mm)	Φ103*70H
开孔尺寸/Cutout (mm)	Φ95
功率/Power (W)	20W
光学配置/Holder	1304/1507/020 /030/1816
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ95




基本参数/Parameters

产品型号/Model	AC 9161 125-圆/Round
产品尺寸/Size (mm)	Φ132*75H
开孔尺寸/Cutout (mm)	Φ125
功率/Power (W)	30W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ125




基本参数/Parameters

产品型号/Model	AC 9161 150-圆/Round
产品尺寸/Size (mm)	Φ160*80H
开孔尺寸/Cutout (mm)	Φ150
功率/Power (W)	40W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°



产品尺寸图/Dimension (mm)

开孔/Cutout
Φ150



AC 9161 悦系列 DOWNLIGHT


高流明 | 防眩目 | 防水防雾

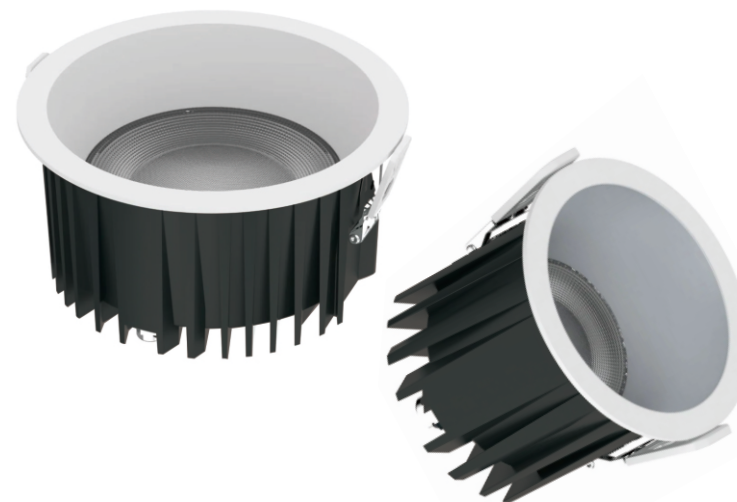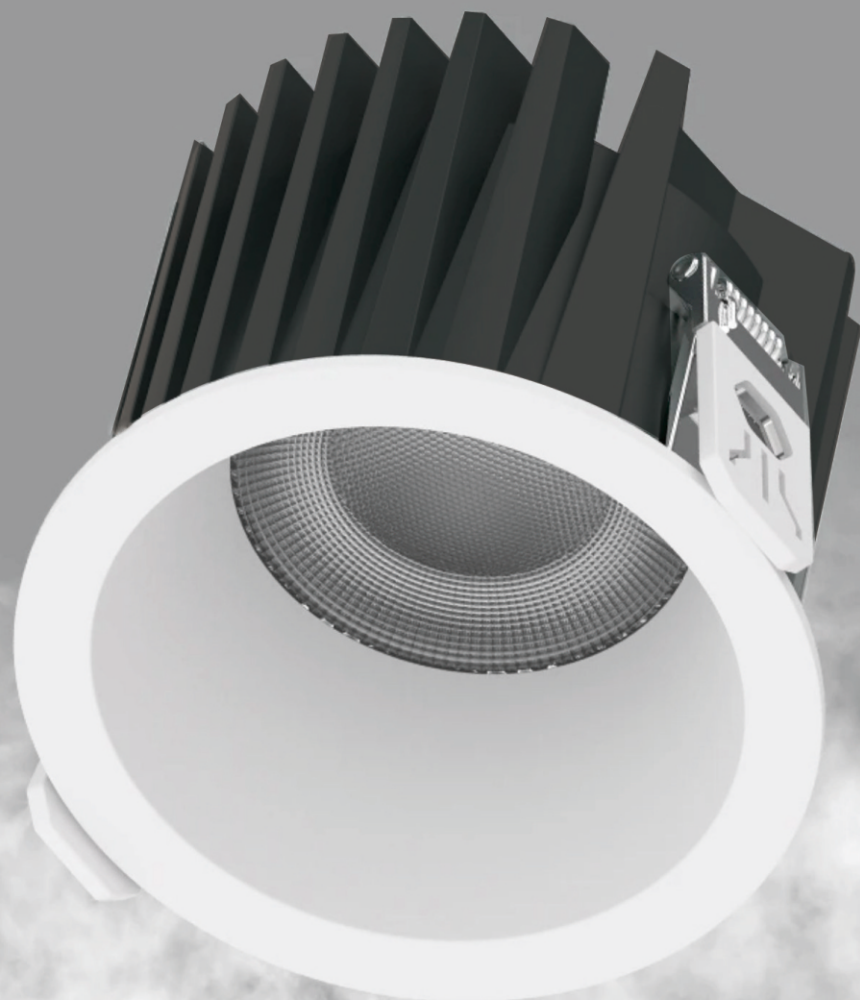

基本参数/Parameters

产品型号/Model	AC 9161 170-圆/Round
产品尺寸/Size (mm)	Φ180*85H
开孔尺寸/Cutout (mm)	Φ170
功率/Power (W)	40-45W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9161 170-圆/Round
产品尺寸/Size (mm)	Φ180*85H
开孔尺寸/Cutout (mm)	Φ170
功率/Power (W)	50W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)




Bright moon series

KX 3085 皓月系列



90°



15° -60°



柔光

为满足更多空间对光的设计需求皓影系列

分别搭载三大光学系统自由切换

90°出光 40°截光角 + 15°~60°配光 + 超级柔光

同时可以透镜款添加蜂窝网及各种光学配件

真正满足多空间多用途应用

To meet the design requirements of more spaces for light, the Avera series
Equipped with three optical systems respectively, which can be freely switched.

90° beam angle, 40° cutoff angle + 15° to 60° distribution + super soft light

At the same time, the lens model can be equipped with cellular networks and various optical accessories.

Properly meeting the requirements for multi-space and multi-purpose applications


适用于:

酒店、商场、服装店、办公室、家居等照明场所。

Hotel, shopping mall, clothing store, office, home and other lighting venues.



15°24°36°60°

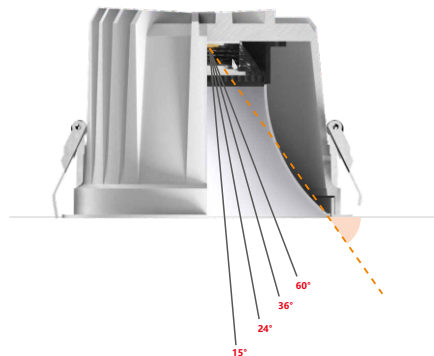

角度决定高度 The angle determines the height

专为满足层高3-12米空间高度量身定制,搭载60°36°24°15°系列光学配光

Designed specifically to meet the space height requirements of 3-12 meters, it is equipped with the 60°, 36°, 24°, and 15° series of optical distribution optics.

多种色彩防眩罩工艺定制,为空间增添更多趣味性色彩


Customized multi-color anti-glare covers are available, adding more interesting colors to the space.



基本参数/Parameters

产品型号/Model	KX3085-A 75-圆/Round
产品尺寸/Size (mm)	Φ82*52.5H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	7W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 36° ☒ 60°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX3085-A 95-圆/Round
产品尺寸/Size (mm)	Φ101*69H
开孔尺寸/Cutout (mm)	Φ95
功率/Power (W)	15W
光学配置/Holder	1304/1507/020/1816/030
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 36° ☒ 60°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX3085-A 130-圆/Round
产品尺寸/Size (mm)	Φ137*97H
开孔尺寸/Cutout (mm)	Φ130
功率/Power (W)	25W
光学配置/Holder	1507/020/1816/030/040
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☒ 24° ☒ 36° ☒ 60°

产品尺寸图/Dimension (mm)





超级泛光系列Super Floodlight Series

出光90° 截光角40°


Outlight 90° Cut-off angle 40°

安装灯具间距大 高度的均匀性光斑 舒适的视觉效果

Large spacing for installing lamps, uniform light spots at different heights, and comfortable visual effect

适合超高均匀度的高级空间场所应用

Suitable for advanced spatial applications with extremely high uniformity

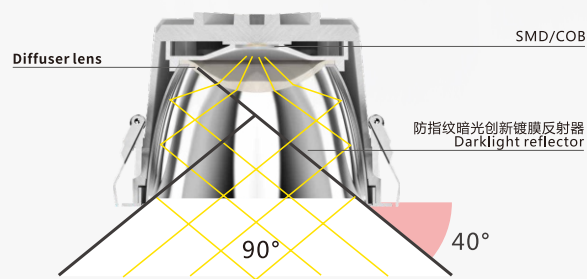


UGR < 19



基本参数/Parameters

产品型号/Model	KX3085-A 75-圆/Round
产品尺寸/Size (mm)	Φ82*52.5H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	7W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	90°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX3085-A 95-圆/Round
产品尺寸/Size (mm)	Φ101*69H
开孔尺寸/Cutout (mm)	Φ95
功率/Power (W)	15W
光学配置/Holder	1304/1507/020/1816/030
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	90°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX3085-B 130-圆/Round
产品尺寸/Size (mm)	Φ137*97H
开孔尺寸/Cutout (mm)	Φ130
功率/Power (W)	25W
光学配置/Holder	1507/020/1816/030/040
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	90°

产品尺寸图/Dimension (mm)



让灯光与空间融为一体



Let the light blend seamlessly with the space.

创新柔光光学设计, 消融灯具边界设计理念, 让光线真正融入天花, 让空间本身更魅力

Innovative soft-light optical design, eliminating the boundary concept of lamps, allowing the light to truly blend into the ceiling, making the space itself more captivating.

让光线真正融入天花, 让空间本身更魅力, 适应全色域光源色温调节变化, 光斑依然完美柔和, 享受舒适生活, 从这里开始...


Let the light truly blend into the ceiling, making the space even more captivating. Adapt to the color temperature adjustment of the full-color spectrum light source. The light spots remain perfectly soft. Enjoy a comfortable life. Start from here....

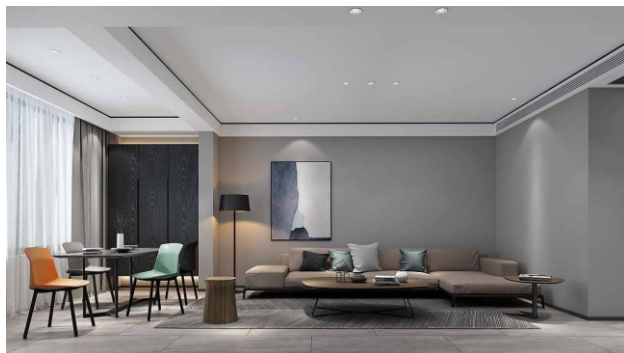

基本参数/Parameters

产品型号/Model	KX3085-A 75-圆/Round
产品尺寸/Size (mm)	Φ82*52.5H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	7W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	110°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX3085-A 95-圆/Round
产品尺寸/Size (mm)	Φ101*69H
开孔尺寸/Cutout (mm)	Φ95
功率/Power (W)	15W
光学配置/Holder	1304/1507/020/1816/030
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	110°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX3085-B 130-圆/Round
产品尺寸/Size (mm)	Φ137*97H
开孔尺寸/Cutout (mm)	Φ130
功率/Power (W)	25W
光学配置/Holder	1507/020/1816/030/040
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	110°

产品尺寸图/Dimension (mm)



KX 3182 塔米系列 DOWNLIGHT

高流明 | 防眩目 | 防水防雾 | 高空筒灯




基本参数/Parameters

产品尺寸图/Dimension (mm)



产品型号/Model	KX 3182 114-圆/Round
产品尺寸/Size (mm)	Φ114*152H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	25W
光学配置/Holder	020 /030/040/1507/1816
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 60°




基本参数/Parameters

产品尺寸图/Dimension (mm)



产品型号/Model	KX 3182 138-圆/Round
产品尺寸/Size (mm)	Φ138*163H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	30W
光学配置/Holder	020 /030/040/1507/1816
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☐ 60°





KX 3182 塔米系列 DOWNLIGHT

高流明 | 防眩目 | 防水防雾 | 高空筒灯

基本参数/Parameters


产品型号/Model	KX 3182 170-圆/Round
产品尺寸/Size (mm)	Φ170*182H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	50W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 60°



基本参数/Parameters

产品型号/Model	KX 3182 206-圆/Round
产品尺寸/Size (mm)	Φ206*215H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	80W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 60°



产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	KX 3182 236-圆/Round
产品尺寸/Size (mm)	Φ236*240H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	100W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 60°

产品尺寸图/Dimension (mm)

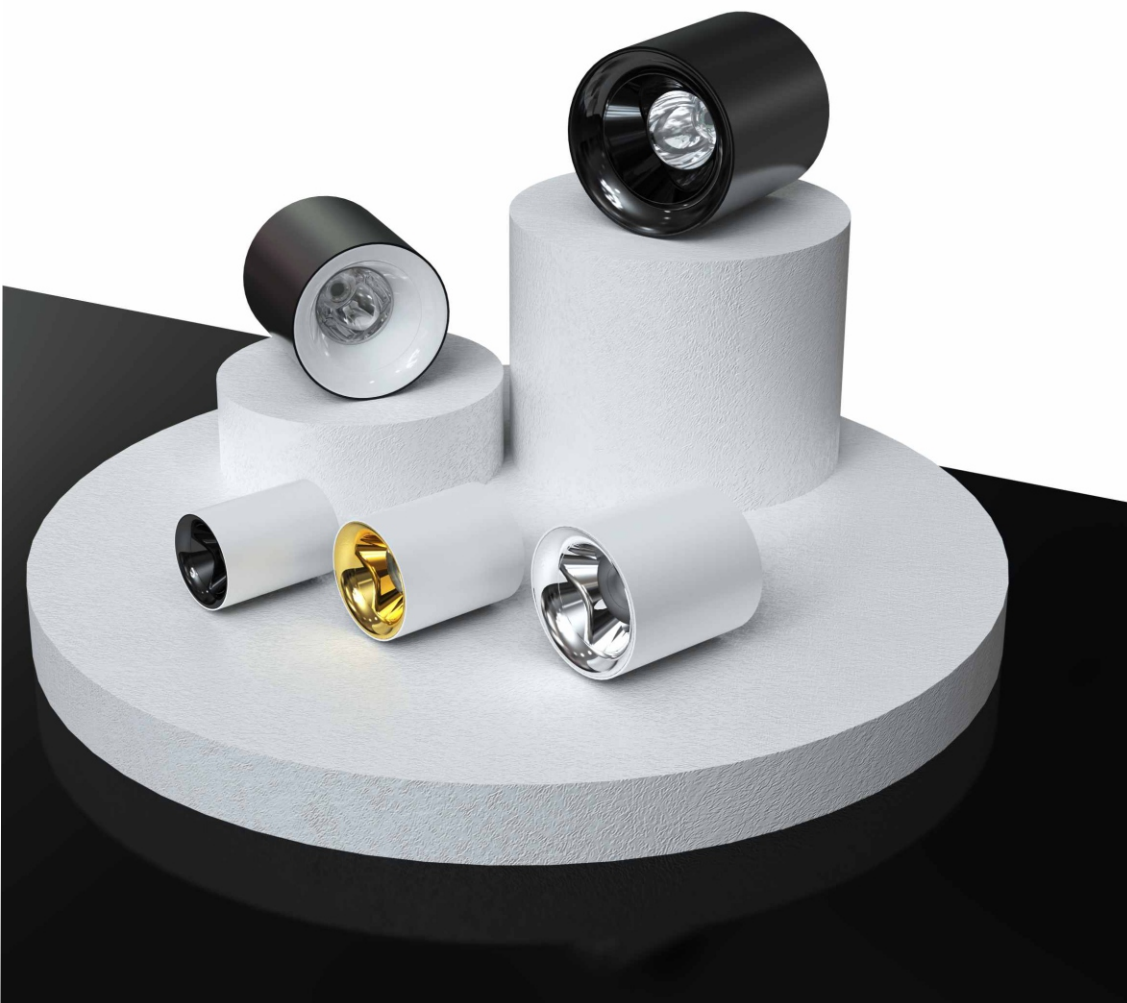




Ac9197 曼迪系列 DOWNLIGHT

高流明 | 防眩目 | 高空筒灯

基本参数/Parameters


产品型号/Model	AC 9197 圆/Round		
产品尺寸/Size (mm)	$\phi 180 \times 230H$ $\phi 200 \times 270H$ $\phi 240 \times 300H$		
功率/Power (W)	30-50W	60-80W	70-100W
光学配置/Holder	020 /030/040/1507/1816/2520		
防水等级/IP Level	IP 20		
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black		
光学角度/Beam Angle (°)	☒ 15° ☐ 24° ☐ 38° ☐ 60°		

产品尺寸图/Dimension (mm)

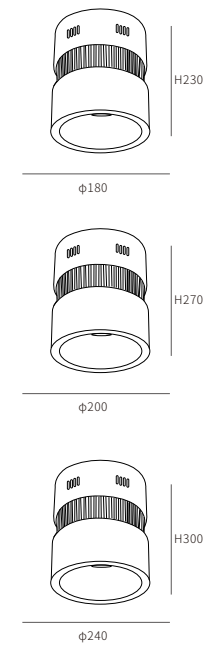


AC 9076 艾顿系列 DOWNLIGHT

高流明 | 防眩目 | 明装筒灯

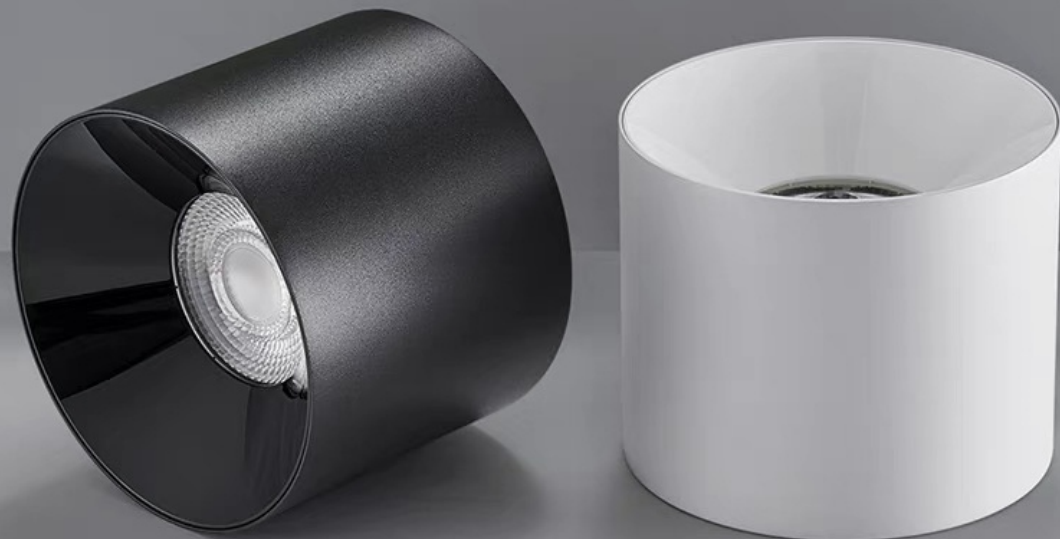

产品分解实物图
Product Breakdown Diagram

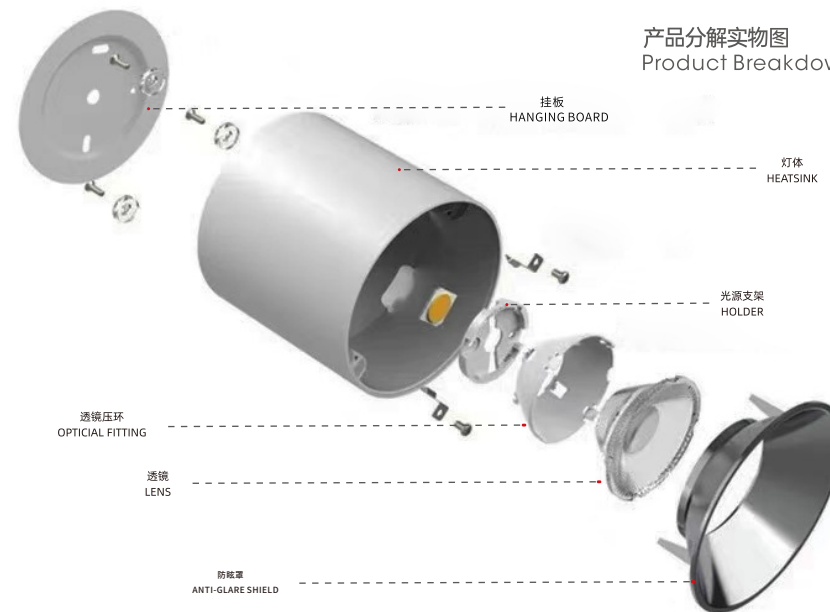

基本参数/Parameters

产品型号/Model AC 9076 77-圆/Round

产品尺寸/Size (mm) $\phi 77 \times 85H$

开孔尺寸/Cutout (mm) /

功率/Power (W) 6W


光学配置/Holder 1304/1507/020

防水等级/IP Level IP20

面环颜色/Color ☐ 砂白/Matte White
☒ 砂黑/Matte Black

光学角度/Beam Angle (°) ☒ 15° ☒ 24° ☒ 38° ☒ 60°

产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model AC 9076 100-圆/Round

产品尺寸/Size (mm) $\phi 100 \times 90H$

开孔尺寸/Cutout (mm) /

功率/Power (W) 12W


光学配置/Holder 1304/1507/020

防水等级/IP Level IP20

面环颜色/Color ☐ 砂白/Matte White
☒ 砂黑/Matte Black

光学角度/Beam Angle (°) ☒ 15° ☒ 24° ☒ 38° ☒ 60°

产品尺寸图/Dimension (mm)






AC 9076 艾顿系列 DOWNLIGHT

高流明 | 防眩目 | 明装筒灯

基本参数/Parameters


产品型号/Model	AC 9076 120-圆/Round
产品尺寸/Size (mm)	Φ120*100H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	20W
光学配置/Holder	020 /030/040/1507
防水等级/IP Level	IP20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 60°



基本参数/Parameters

产品型号/Model	Ac9076 150-圆/Round
产品尺寸/Size (mm)	Φ150*120H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	30W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 60°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	Ac9076 175-圆/Round
产品尺寸/Size (mm)	Φ175*130H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	35W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 60°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9076 200-圆/Round
产品尺寸/Size (mm)	Φ200*140H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	40-45W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 60°


产品尺寸图/Dimension (mm)






0-90°

Adjustable focal length



KX 3090 鹰眼系列 TRACKLIGHT

调焦 | 防眩目 | 商业轨道射灯

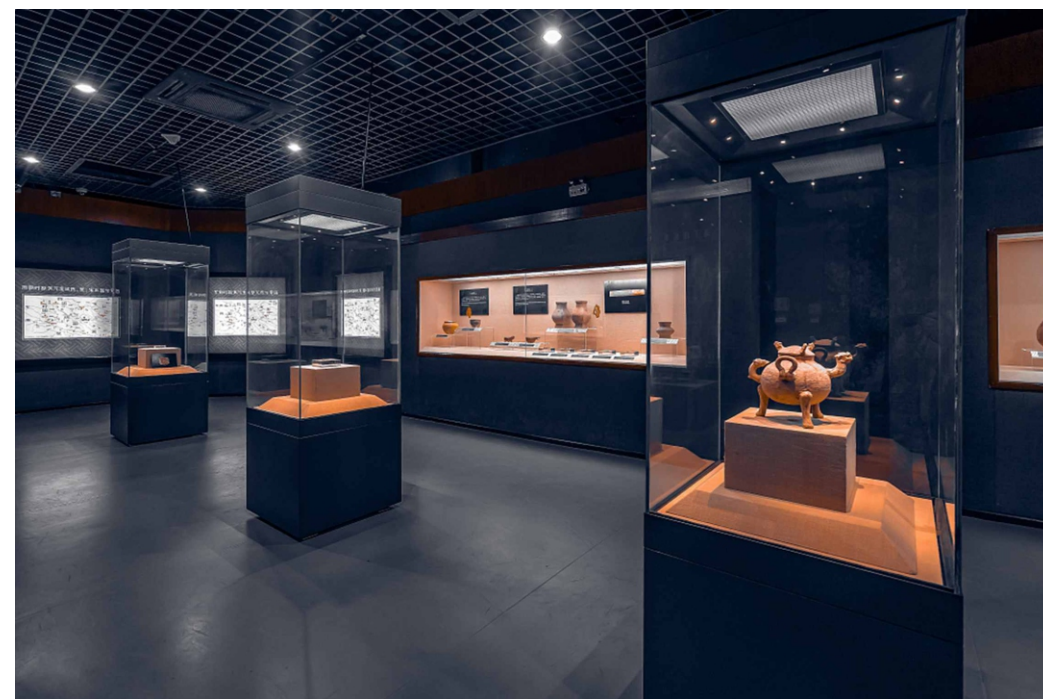

基本参数/Parameters

产品型号/Model	KX 3090 轨道调焦款
产品尺寸/Size (mm)	$\phi 55 \times 115H$ $\phi 65 \times 135H$ $\phi 75 \times 150H$ $\phi 85 \times 165H$
功率/Power (W)	12W 18W 25W 35W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°





KX 3090 鹰眼系列 TRACKLIGHT

防眩目 | 商业轨道射灯



基本参数/Parameters

产品型号/Model	KX 3090 轨道款	防水等级/IP Level	IP 20
产品尺寸/Size (mm)	φ55*115H φ65*135H φ75*150H φ85*165H	面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
功率/Power (W)	12W 18W 25W 35W	光学角度/Beam Angle (°)	15° 24° 38° 50°
光学配置/Holder	020 /030/040/1507/1816/2520		





KX 3092 曼迪系列 TRACKLIGHT

防眩目 | 商业轨道射灯

光学角度/Beam






隐藏式轨道灯



基本参数/Parameters

产品型号/Model	KX 3092 轨道款
产品尺寸/Size (mm)	$\phi 54 \times 110H$ $\phi 68 \times 130H$ $\phi 85 \times 140H$
功率/Power (W)	12W 20W 30W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°






AC 9279

轨道款/明装吸顶款/嵌入式款

Track type / Surface-mounted ceiling type / Recessed type


Adjustable focal length



基本参数/Parameters

产品型号/Model	AC 9279-TR 48-圆/Round
产品尺寸/Size (mm)	Φ48*105*165H
功率/Power (W)	10W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC9279-TR 55-圆/Round
产品尺寸/Size (mm)	Φ55*130*180H
功率/Power (W)	15W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9279-TR 65-圆/Round
产品尺寸/Size (mm)	Φ65*150*215H
功率/Power (W)	25W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9279-TR 75-圆/Round
产品尺寸/Size (mm)	Φ75*150*215H
功率/Power (W)	30W
光学配置/Holder	020/030/040/1507/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9279-TR 85-圆/Round
产品尺寸/Size (mm)	Φ85*175*240H
功率/Power (W)	35W
光学配置/Holder	020/030/040/1507/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°


产品尺寸图/Dimension (mm)





AC 9279 明装吸顶款 Surface-mounted ceiling type


Adjustable focal length



基本参数/Parameters

产品型号/Model	AC 9279-SF 48-圆/Round
产品尺寸/Size (mm)	Φ48*105*149H
功率/Power (W)	10W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC9279-SF 55-圆/Round
产品尺寸/Size (mm)	Φ55*130*174H
功率/Power (W)	15W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9279-SF 65-圆/Round
产品尺寸/Size (mm)	Φ65*150*195H
功率/Power (W)	25W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°


产品尺寸图/Dimension (mm)



基本参数/Parameters

产品型号/Model	AC 9279-SF 75-圆/Round
产品尺寸/Size (mm)	Φ75*150*200H
功率/Power (W)	30W
光学配置/Holder	020/030/040/1507/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)



基本参数/Parameters


产品型号/Model	AC 9279-SF 85-圆/Round
产品尺寸/Size (mm)	Φ85*175*225H
功率/Power (W)	35W
光学配置/Holder	020/030/040/1507/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ☒ 砂黑/Matte Black
光学角度/Beam Angle (°)	☐ 15° ☐ 24° ☐ 38° ☒ 50°

产品尺寸图/Dimension (mm)



AC 9279 嵌入式款 Recessed type

Adjustable focal length




基本参数/Parameters

产品型号/Model	AC 9279-CL 48-圆/Round
产品尺寸/Size (mm)	Φ48*105*126H
功率/Power (W)	10W
开孔尺寸/Cutout (mm)	Φ55
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black

光学角度/Beam Angle (°)	15°	24°	38°	50°
---------------------	-----	-----	-----	-----

产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	AC 9279-CL 55-圆/Round
产品尺寸/Size (mm)	Φ55*130*126H
功率/Power (W)	15W
开孔尺寸/Cutout (mm)	Φ55
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black

光学角度/Beam Angle (°)	15°	24°	38°	50°
---------------------	-----	-----	-----	-----

产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	AC 9279-CL 65-圆/Round
产品尺寸/Size (mm)	Φ65*150*171H
功率/Power (W)	25W
开孔尺寸/Cutout (mm)	Φ75
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black

光学角度/Beam Angle (°)	15°	24°	38°	50°
---------------------	-----	-----	-----	-----

产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	AC 9279-CL 75-圆/Round
产品尺寸/Size (mm)	Φ75*150*171H
功率/Power (W)	30W
开孔尺寸/Cutout (mm)	Φ75
光学配置/Holder	020/030/040/1507/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black

光学角度/Beam Angle (°)	15°	24°	38°	50°
---------------------	-----	-----	-----	-----

产品尺寸图/Dimension (mm)




基本参数/Parameters

产品型号/Model	AC 9279-CL 85-圆/Round
产品尺寸/Size (mm)	Φ85*175*197H
功率/Power (W)	35W
开孔尺寸/Cutout (mm)	Φ95
光学配置/Holder	020/030/040/1507/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black

光学角度/Beam Angle (°)	15°	24°	38°	50°
---------------------	-----	-----	-----	-----

产品尺寸图/Dimension (mm)



Lighting Design Customizes Art



灯光设计定制艺术

Thank you

感谢您的查阅