Customized

i.SHA
THE ULTIMATE LIGHTING SOLUTION

ZHONGSHAN i.SHA LIGHTING TECHNOLOGY CO.,LIMITED
中山市依莎照明科技有限公司
广东省中山市古镇镇曹三工业园同兴二路8号
Factory:NO.8 Tongxing Second Road, Caosan Industrial Park, Guzhen Town, Zhongshan City, Guangdong Province, China.
广东省中山市古镇镇中兴大道68号星光联盟9楼C区12卡
Exclusive Shop: Room 12, 9th Floor,Area C, Star Alliance, 68 Zhongxing Avenue, Guzhen Town, Zhongshan City, Guangdong Province

2026-2027 CATALOGUE OF i.SHA SERIES
2026-2027 依莎系列产品目录

i.SHA
THE ULTIMATE LIGHTING SOLUTION

Your Exclusive
Lighting Designer

依莎·定制懂你的光

Light ensouls the building
Shadow creates space and atmosphere
i.SHA is born for the arts
We are specialized in lights, so that we can create light that most suited for you
i.SHA aims to customize masterpieces for you

Lighting
Design Customizes Arts

灯光设计定制艺术

i.SHA
THE ULTIMATE LIGHTING SOLUTION

BRAND IDEA

品牌理念

灯具不只是灯具
更是灯光艺术
灯光，赋予建筑灵魂
光影，营造空间氛围
光与空间
光与自然
光与情感
光与健康
光与生活
皆密不可分
——光，是感知空间的媒介

而如何对光进行精准控制
以极简的美学设计诠释光的艺术
便是依莎 灯光设计师们孜孜不倦的追求···

Lamps are not only lamps
But the arts of light
Light ensouls the building
Shadow creates space and atmosphere
Light and space
Light and nature
Light and emotion
Light and health
Light and life
They are all inextricably linked
——Light is a medium for perceiving space

How to precisely control the light
and interpret the art of light with minimalist aesthetic design
is tireless pursuitof i.SHA's light designers···

i.SHA
THE ULTIMATE LIGHTING SOLUTION

BRAND STORY

品牌故事

品牌溯源——源于光的美好馈赠

光，乃万物之源，是大自然赐予人类最美好的礼物。
世界著名建筑师贝聿铭曾说“让光线来做设计”，
伟大的建筑师路易斯康也认为“光是一个空间的神奇创造者”。

i.SHA依莎秉承最纯粹的初心，
以象征光明的i.SHA依莎灯光艺术，赋予建筑空间以灵魂。

Light is the source of all things, and it is the nature's best gift to human beings.
The world-renowned architect Ieoh Ming Pei once said"Let the light to guide the design",
The great architect Louis Kahn also believed"Light is the magical creator of a space".

i.SHAadheres with its purest original intention
Use theI.SHAarts of light that symbilizes lighting to ensouls the building.

品牌创建——国际顶尖设计师工作室

2008年，i.SHA依莎创始人与国内外多位顶尖的室内设计师，创建
“i.SHA依莎灯光设计定制工作室”，服务案例遍及欧洲、东南亚、南
美洲等世界各地，精准的控光技术和丰富的灯光灯光定制系统解决方案
经验，让i.SHA依莎成为顾客心中灯光艺术的最佳倾听者与设计者。

i.SHA依莎，为顶尖设计顶尖，为杰作定制杰作。
因为懂光，所以定制懂你的光。

In 2008, the founder of i.SHA and many top interior designers at home and abroad
together created "i.SHA Lighting Design and Customization Studio". With its service cases
in Europe, Southeast Asia, South America and other parts of the world,i.SHA has precise
light control technology and rich experience in lighting and lighting customized system
solutions, which makes i.SHA the best listener and designer of lighting arts in customers'
minds.

i.SHA aims to customize masterpieces for you with our top design
We are specialized in lights, so that we can create light that most suited for you

品牌价值——为空间赋予艺术生命力

建筑是凝固的音乐，而照明则是流动的天际线。
对于依莎来说，光不仅是建筑和空间价值的核心，光与空间，光与自然，光与
情感，光与健康，光与生活，皆密不可分。
光，是感知空间的媒介，更能改善生活，实现社会创新发展。

2020年，i.SHA依莎开启品牌战略升级，全面进军国内市场。
i.SHA依莎，以极简的美学设计诠释光的艺术，将不遗余力打造成为灯光定制
系统解决方案专家，从而实现“铸就百年依莎，缔造光影艺术价值”的宏伟品
牌愿景。

Architecture is the frozen music, while lighting is a floating skyline.
For i.SHA, light is not just the core of the building and space value. Light and space, light and
nature, light and emotion, light and health, light and life are all inextricably linked.
Light is a medium for perceiving space, which can improve life and realize social innovation
and development.

In 2020, i.SHA starts its the brand strategy upgrade, fully entering the domestic market.
i.SHA interprets the arts of light with minimalist aesthetic design, sparing no effort to become
an expert in lighting customization system solutions, thereby realizing the grand brand vision
of "making i.Sha a time-tested brand and creating the value of light and shadow art".



Lighting design
customization studio

灯 光 设 计 定 制 工 作 室



i.SHA
THE ULTIMATE LIGHTING SOLUTION

YOUR EXCLUSIVE LIGHTING DESIGNER

依莎，定制懂你的光

核心价值主张释义：
灯光，赋予建筑灵魂
光影，感知空间氛围
依莎，为艺术之光而生
因为懂光，所以定制更懂你的光
依莎，为杰作定制杰作

Interpretation of the core value:
Light ensouls the building
Shadow creates space and atmosphere
i.SHA is born for the arts
We are specialized in lights, so that we can create light that most suited for you
i.SHA aims to customize masterpieces for you

Lighting
Design Customizes Art

灯光设计定制艺术

i.SHA
THE ULTIMATE LIGHTING SOLUTION

BRAND
Company profile

i.SHA依莎简介

中山市依莎照明科技有限公司成立于2008年，坐落于“中国灯饰之都”中山古镇，是一家集商业照明产品研发、设计、生产 、销售、服务于一体的高新科技企业。公司拥有成熟的生产供应链体系，完善的检测设备，数十台车床和压铸机，以及资深的光学工程师、电学工程师等专业技术人才。i.SHA依莎照明产品线涵盖商业照明和家居照明领域，全方位满足各类空间灯光应用解决方案的需求。

Zhongshan i.SHA Lighting Industrial Co., Led was established in 2008, which is located in the ancient town of Zhongshan that is known as the "Capital of Decorative Lighting in China". It is a high-tech enterprise which integrates research and development, design, production, sales and service of commercial lighting products. The company has a mature production and supply chain system, complete testing equipment, dozens of lathes and die-casting machines, as well as senior optical engineers, electrical engineers and other professional and technical personnel. The i.SHA lighting product line covers the areas of commercial lighting and home lighting, which can fully meet the needs of various space lighting as your application solutions.

BRAND Culture

品牌文化

品牌广告语 依莎 · 定制懂你的光
品 牌 定 位 灯光设计定制艺术
品 牌 使 命 成为灯光定制系统 解决方案专家
品 牌 愿 景 铸就百年依莎 缔造光影艺术价值



THE CASE OF i.SHA

i.SHA依莎照明应用场景

- 私人别墅 PRIVATE VILLA
- 家居照明 HOME LIGHTING
- 办公场所 WORKPLACES
- 艺术空间 ART SPACES
- 品牌商店 BRAND STORES
- 酒店会所 HOTELS AND CLUBS
- 购物中心 SHOPPING CENTERS
- 餐厅酒吧 RESTAURANTS AND BARS



i.SHA
THE ULTIMATE LIGHTING SOLUTION

level

依莎照明技术，具备专业成熟的生产技术和设计研发制造能力，严格把控设计和生产品质，提供国际品质的高端商照产品。

在“亮度与对比度、空间距离舒适度、照度均匀性与稳定度”上，达到“设计大师的照明定制标准“，为空间赋予视觉极度舒适的空间体验感和艺术感。

With professional and mature production technology and design R&D and manufacturing capabilities,iSHA lighting technology can strictly control the design and production quality, providing high-end commercial lighting products of international quality.

In terms of "brightness and contrast, space distance comfort, and illuminance uniformity and stability", iSHA has reached the "lighting customization standard of a design master", endowing the space with an extremely comfortable spatial experience and artistic sense.

i.SHA
THE ULTIMATE LIGHTING SOLUTION



master

设计大师级别的定制标准

Design master-level customization standards

i.SHA
THE ULTIMATE LIGHTING SOLUTION



i.SHA
THE ULTIMATE LIGHTING SOLUTION



High Lumen Spotlight Series

KX 3168 i.Chen Series / 依晨系列

高流明 | 深防眩 | 高功率

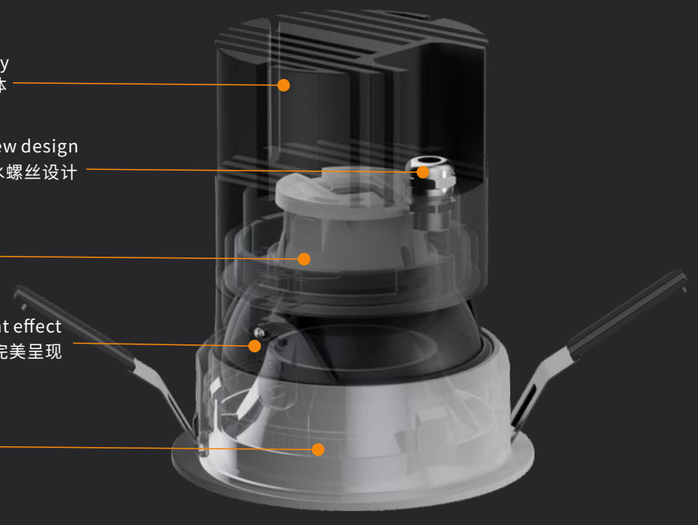

i.SHA
THE ULTIMATE LIGHTING SOLUTION

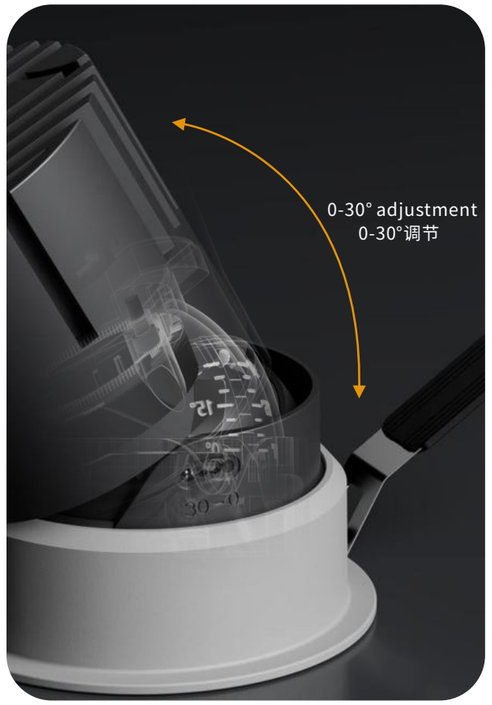

The three-position positioning bead design from 0° to 30° ensures the consistency of the light spot position
0°-30°三档定位珠设计
确保光斑位置一致性



基本参数/Parameters

产品型号/Model	KX 3168 55-圆/Round
产品尺寸/Size (mm)	ϕ63*80H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	5-9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	KX 3168 55-圆/Round
产品尺寸/Size (mm)	ϕ63*109H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	8-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55



i.SHA
THE ULTIMATE LIGHTING SOLUTION



High Lumen Spotlight Series

KX 3168 i.Chen Series / 依晨系列

高流明 | 深防眩 | 高功率

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	ϕ82*78H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	8-10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75



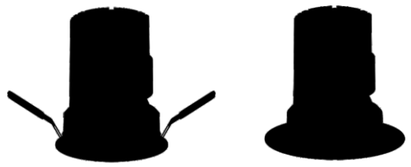

基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	ϕ82*95H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	12-15W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75



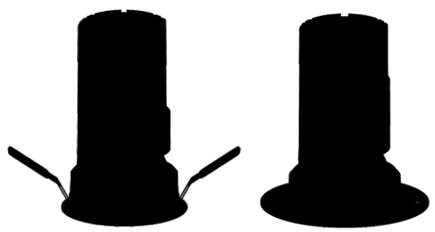

基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	ϕ82*127H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	15-20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75



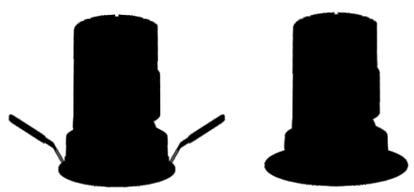

基本参数/Parameters

产品型号/Model	KX 3168 95-圆/Round
产品尺寸/Size (mm)	ϕ103*130H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	20-30W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95





基本参数/Parameters

产品型号/Model	KX 3168 55-方/Square
产品尺寸/Size (mm)	63*63*80H
开孔尺寸/Cutout (mm)	55*55
功率/Power (W)	5-8W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
55*55

基本参数/Parameters

产品型号/Model	KX 3168 55-方/Square
产品尺寸/Size (mm)	63*63*110H
开孔尺寸/Cutout (mm)	55*55
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
55*55



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3168 75-方/Square
产品尺寸/Size (mm)	82*82*78H
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	8-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
75*75





基本参数/Parameters

产品型号/Model	KX 3168 75-方/Square
产品尺寸/Size (mm)	82*82*95H
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	12-15W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
75*75







The frameless wings can be adjusted in height and are not restricted by the thickness of the gypsum board

无边框翅膀可调节高度
不挑石膏板厚度



i.SHA
THE ULTIMATE LIGHTING SOLUTION

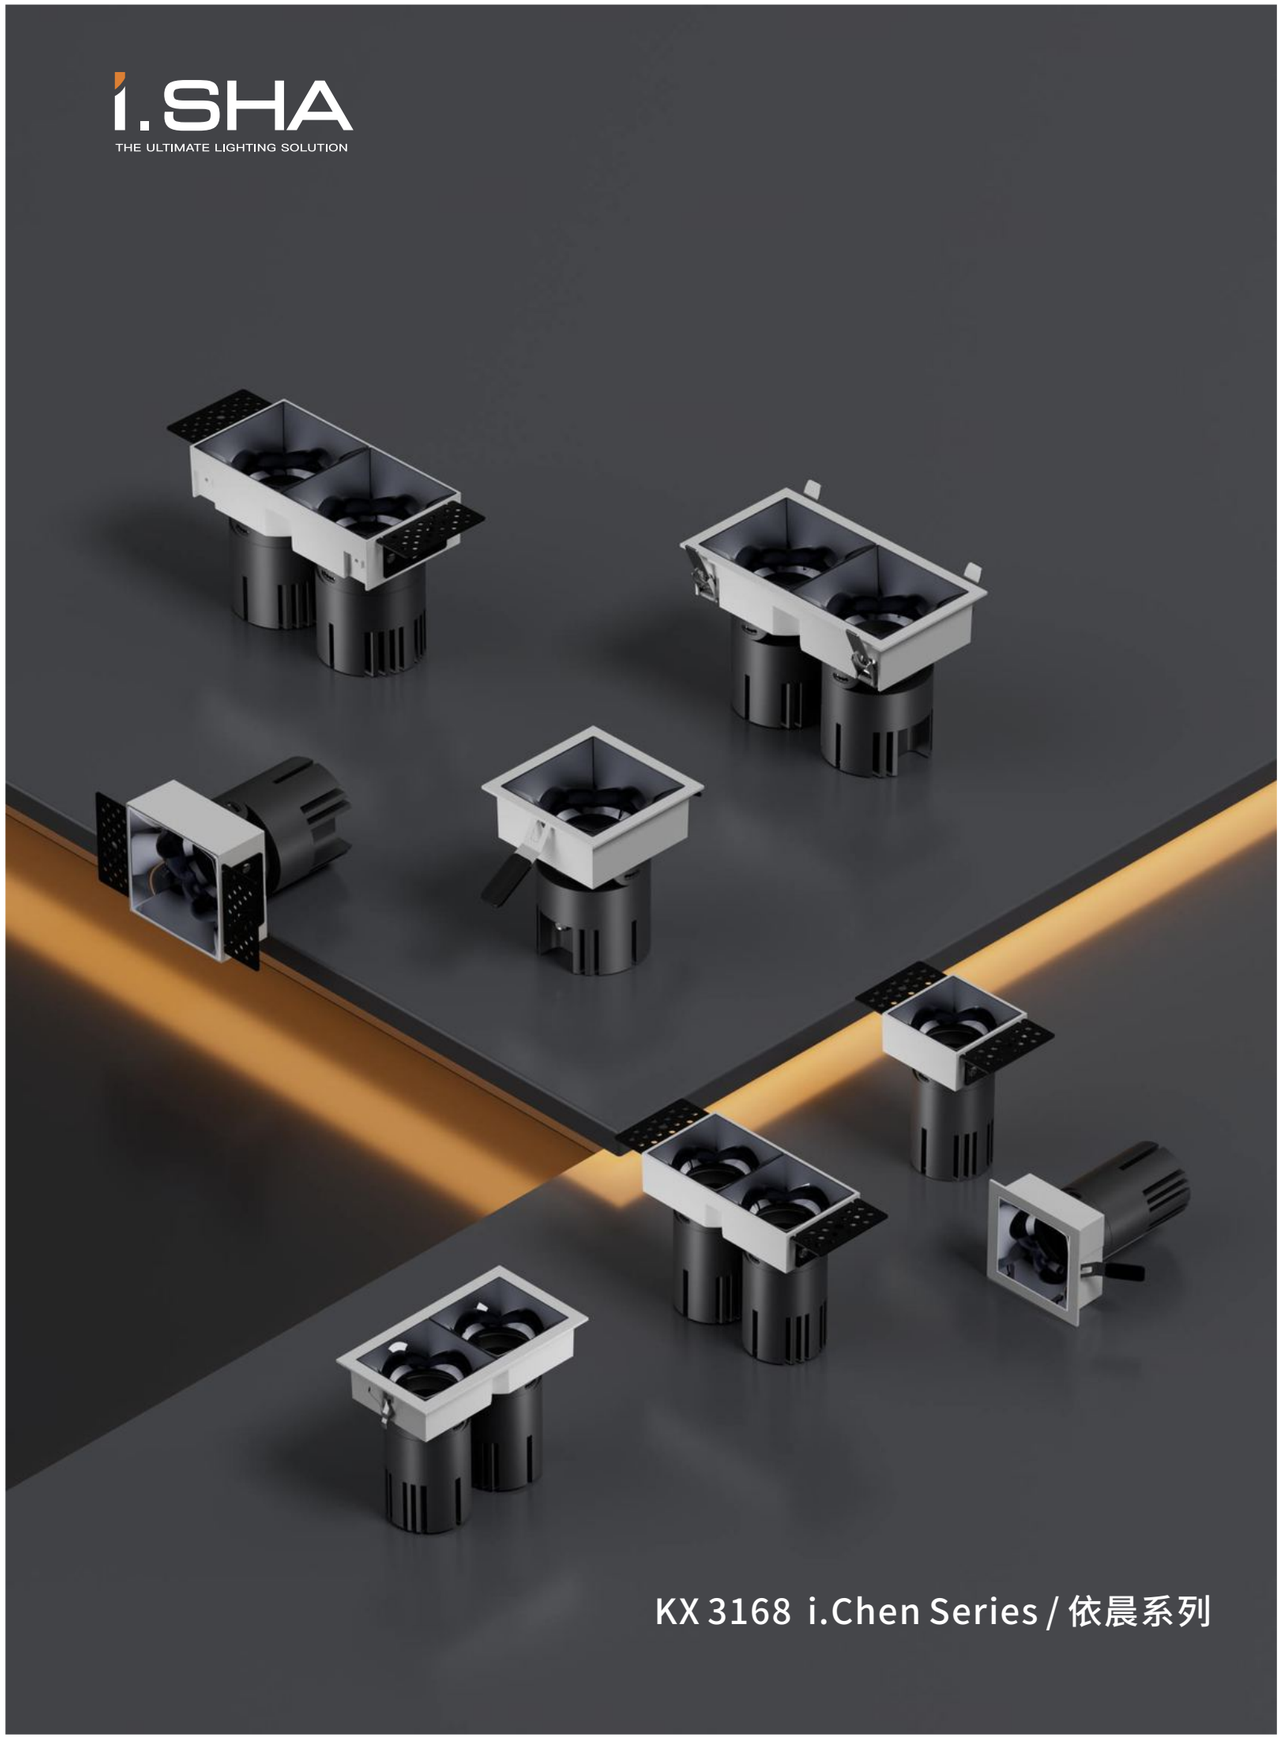

KX 3168 i.Chen Series / 依晨系列

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3168 75-方/Square
产品尺寸/Size (mm)	82*82*127H
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	18-25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
75*75





基本参数/Parameters

产品型号/Model	KX 3168 95-方/Square
产品尺寸/Size (mm)	103*103*110H
开孔尺寸/Cutout (mm)	95*95
功率/Power (W)	20-25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
95*95





基本参数/Parameters

产品型号/Model	KX 3168 55-方 双头/Square
产品尺寸/Size (mm)	63*114*85H
开孔尺寸/Cutout (mm)	55*105
功率/Power (W)	8-12W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
55*105





基本参数/Parameters

产品型号/Model	KX 3168 55-方 双头/Square
产品尺寸/Size (mm)	63*114*115H
开孔尺寸/Cutout (mm)	55*105
功率/Power (W)	12-15W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
55*105



i.SHA
THE ULTIMATE LIGHTING SOLUTION

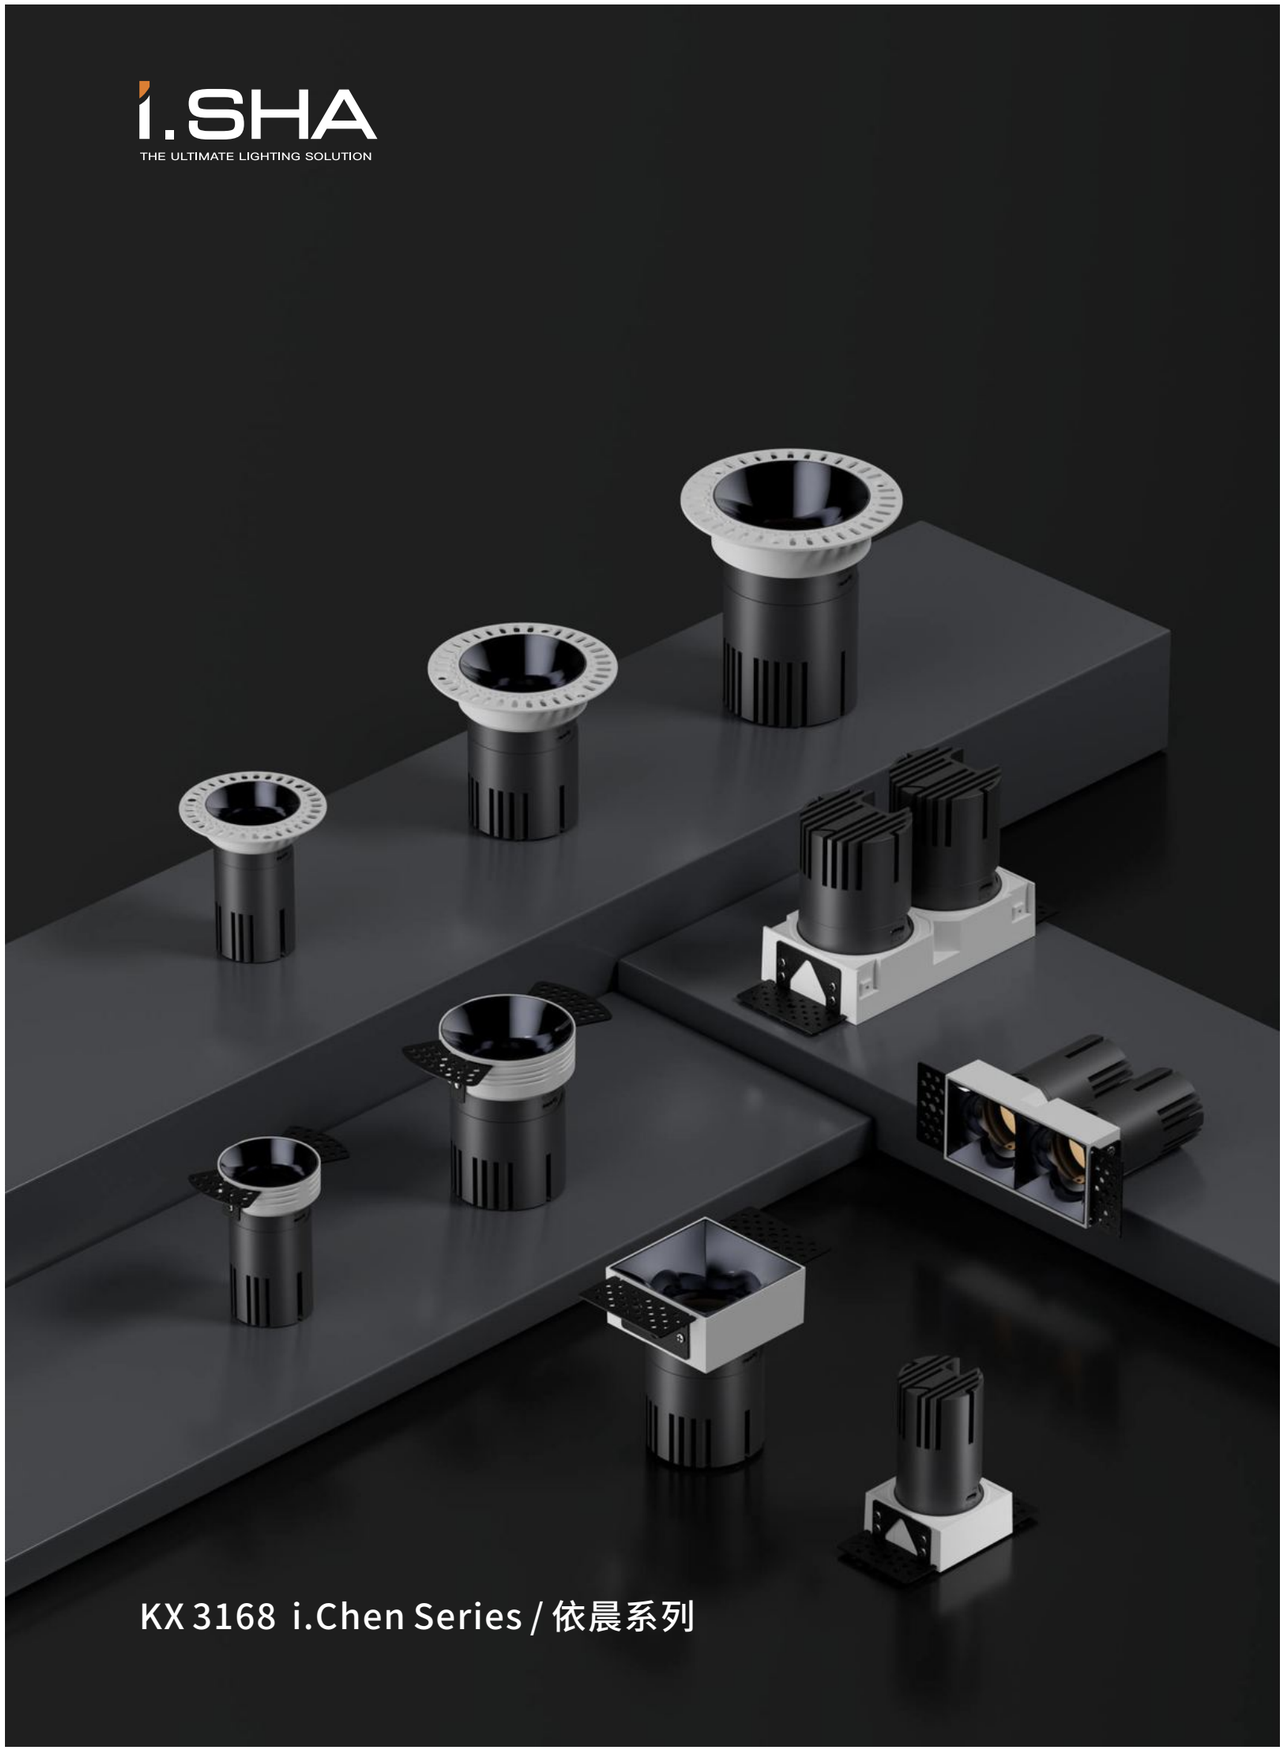

KX 3168 i.Chen Series / 依晨系列

i.SHA
THE ULTIMATE LIGHTING SOLUTION





基本参数/Parameters

产品型号/Model	KX 3168 75-方 双头/Square
产品尺寸/Size (mm)	84*155*86H
开孔尺寸/Cutout (mm)	75*125
功率/Power (W)	8-10W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
75*125







基本参数/Parameters

产品型号/Model	KX 3168 75-方 双头/Square
产品尺寸/Size (mm)	84*155*105H
开孔尺寸/Cutout (mm)	75*125
功率/Power (W)	12-15W*2
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
75*125







基本参数/Parameters

产品型号/Model	KX 3168 75-方 双头/Square
产品尺寸/Size (mm)	84*155*135H
开孔尺寸/Cutout (mm)	75*125
功率/Power (W)	8-12W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
75*125

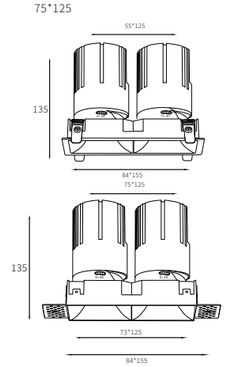

i.SHA
THE ULTIMATE LIGHTING SOLUTION



KX 3168 i.Chen Series / 依晨系列

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	ϕ82*80H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	ϕ82*96H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	12-15W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	ϕ82*80H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	ϕ82*96H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	12-15W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75



i.SHA
THE ULTIMATE LIGHTING SOLUTION





High Lumen Spotlight Series

KX 3168 i.Chen Series / 依晨系列

隐形无边 | 非预埋款射灯



产品尺寸/Size (mm)	φ82*80H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

φ75





基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	φ82*96H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	12-15W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ75



i.SHA
THE ULTIMATE LIGHTING SOLUTION





60° Large shading angle
Effectively filter out glare and provide deep anti-glare protection
60° 大遮光角
有效过滤眩光，深度防炫目





Unlimited installation and display
无边安装后展示

i.SHA
THE ULTIMATE LIGHTING SOLUTION



LED Spotlight Series

KX 3062 i.Star Series / 依星系列

深防眩射灯





i.SHA
THE ULTIMATE LIGHTING SOLUTION

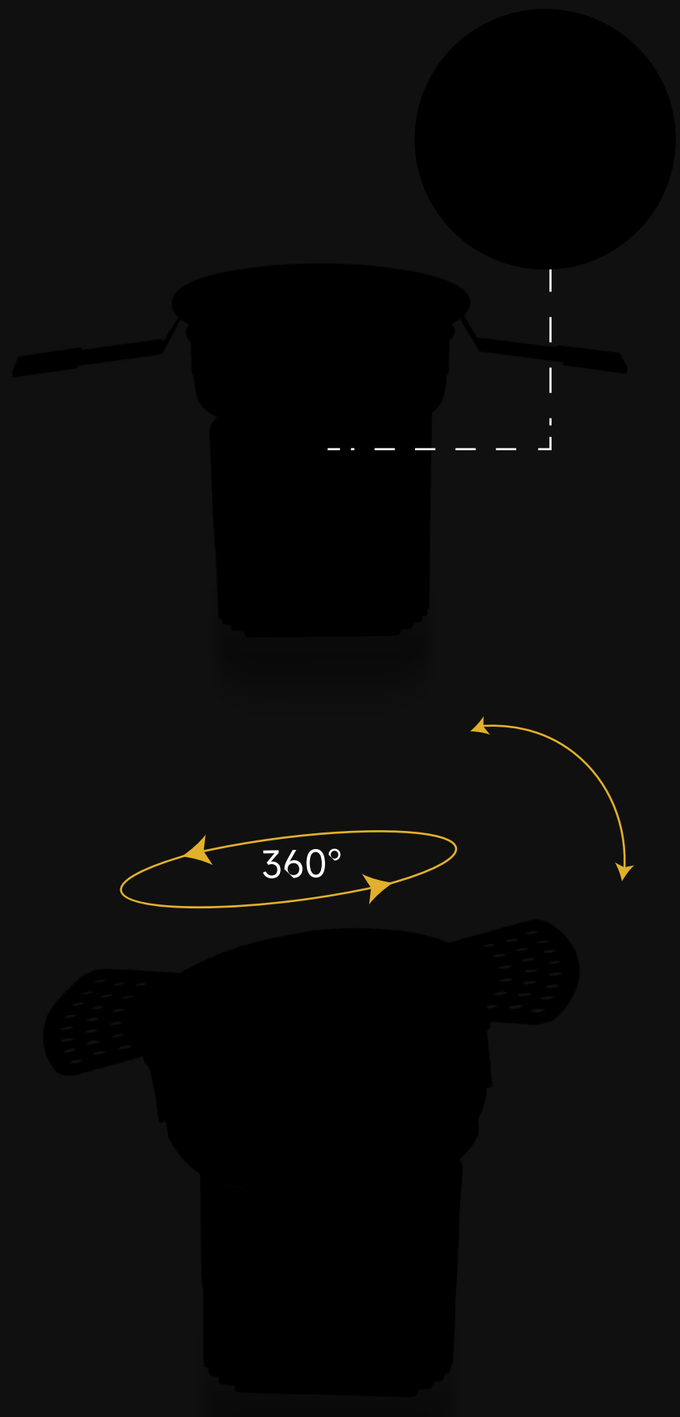

Adjustment of the
Positioning point
调整卡扣，10-36°夹角

Adjustable
Irradiation Angle
灯具360°旋转调节



Product Breakdown Diagram
产品分解实物图

I.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3062 55-圆/Round
产品尺寸/Size (mm)	ϕ62*82H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	KX 3062 75-圆/Round
产品尺寸/Size (mm)	ϕ82*95H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	KX 3062 95-圆/Round
产品尺寸/Size (mm)	ϕ108*118H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	15-20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95





基本参数/Parameters

产品型号/Model	KX 3062 120-150-圆/Round
产品尺寸/Size (mm)	ϕ135*142H ϕ165*152H
开孔尺寸/Cutout (mm)	ϕ120-150
功率/Power (W)	30-40W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ120 ϕ150



i.SHA
THE ULTIMATE LIGHTING SOLUTION

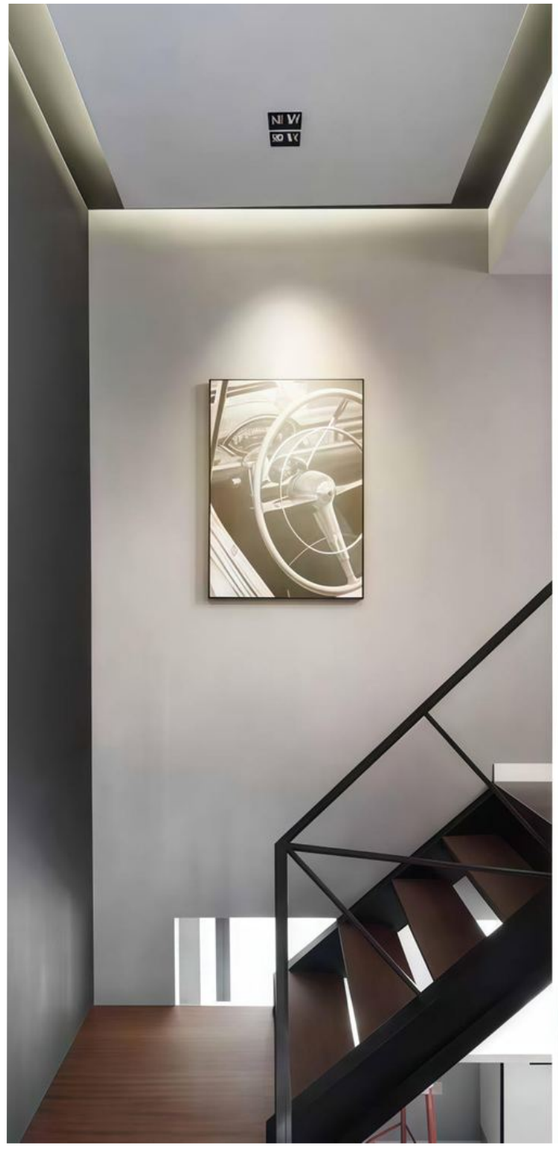



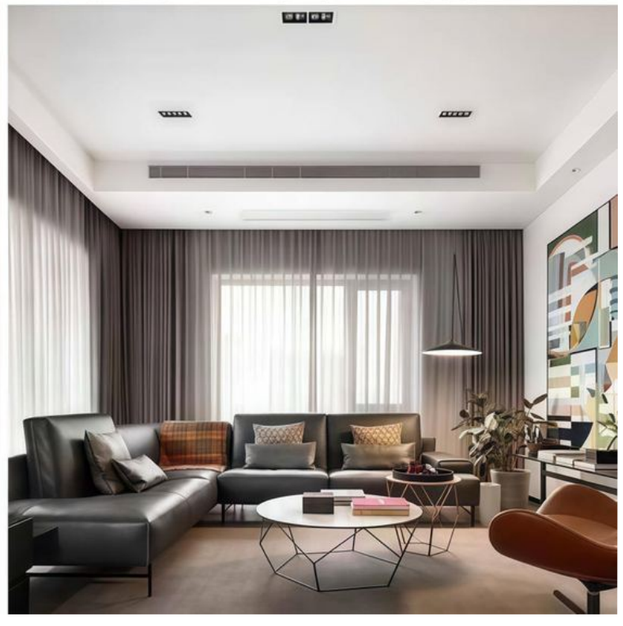



Versatile form, flexible replacemen

FIXED

ADJUSTABLE

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3062 55-方/Square
产品尺寸/Size (mm)	62*62*82H
开孔尺寸/Cutout (mm)	55*55
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	砂白/Matte White 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
55*55







基本参数/Parameters

产品型号/Model	KX 3062 75-方/Square
产品尺寸/Size (mm)	85*82*95H
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	砂白/Matte White 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
75*75







基本参数/Parameters

产品型号/Model	KX 3062 150*75-方/Square
产品尺寸/Size (mm)	157*82*95H
开孔尺寸/Cutout (mm)	150*75
功率/Power (W)	10W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	砂白/Matte White 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
150*75







基本参数/Parameters

产品型号/Model	KX 3062 225*75-方/Square
产品尺寸/Size (mm)	230*82*95
开孔尺寸/Cutout (mm)	220*75
功率/Power (W)	10W*3
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	砂白/Matte White 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
220*75





i.SHA
THE ULTIMATE LIGHTING SOLUTION



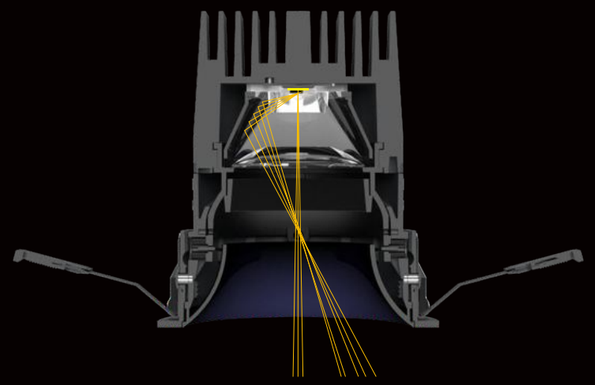



High-efficiency lens
高光效透镜



Precise light control
and smooth transition
精准控光，柔和过渡



Wash wall
洗墙



Anti-glare reflector
防眩罩



Rhombic crystal cover
菱晶罩



U Anti-glare reflector
U型防眩罩



O Anti-glare reflector
O 型防眩罩







High-Efficiency Spostlight Series

KX 3180 高光效射灯系列

i.Ka 依嘉系列



i.SHA
THE ULTIMATE LIGHTING SOLUTION

High-Efficiency Spostlight Series

KX 3180 高光效射灯系列

i.Ka 依嘉系列

替换防眩罩/Anti-glare reflector cup

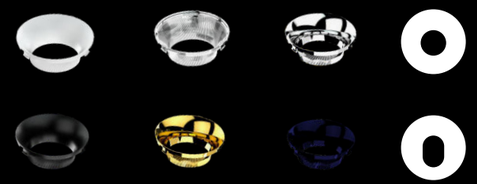

i.SHA
THE ULTIMATE LIGHTING SOLUTION





基本参数/Parameters

产品型号/Model	KX 3180-55-圆/Round
产品尺寸/Size (mm)	φ65*H80 φ85*H80 L90*H80
开孔尺寸/Cutout (mm)	φ55
功率/Power (W)	8W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout

φ55







基本参数/Parameters

产品型号/Model	KX 3180-75-圆/Round
产品尺寸/Size (mm)	φ85*H95 φ110*H95 L115*H95
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout

φ75







基本参数/Parameters

产品型号/Model	KX 3180-95-圆/Round
产品尺寸/Size (mm)	φ105*H142 φ130*H142 L145*H142
开孔尺寸/Cutout (mm)	φ95
功率/Power (W)	25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout

φ95







基本参数/Parameters

产品型号/Model	KX 3180-95-圆/Round
产品尺寸/Size (mm)	φ105*H144 φ130*H142 L145*H142
开孔尺寸/Cutout (mm)	φ95
功率/Power (W)	30W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout

φ95



i.SHA
THE ULTIMATE LIGHTING SOLUTION

High-Efficiency Spostlight Series

KX 3180 高光效射灯系列

i.ka 依嘉系列

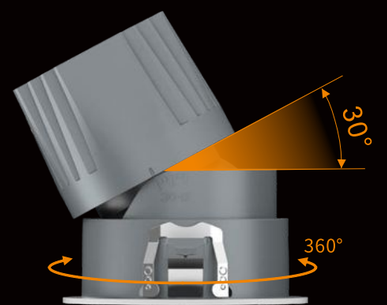

模组摆头30度，水平
旋转360度，可照射任意方向

The module can be tilted 30° and rotated 360° horizontally, allowing lighting in any direction.



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3180-55-方/Square
产品尺寸/Size (mm)	65*65*H80 85*85*H80
开孔尺寸/Cutout (mm)	55*55
功率/Power (W)	8W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
55*55





基本参数/Parameters

产品型号/Model	KX 3180-75-方/Square
产品尺寸/Size (mm)	85*85*H98 115*115*H98
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
75*75





基本参数/Parameters

产品型号/Model	KX 3180-95-方/Square
产品尺寸/Size (mm)	105*105*H146 130*130*H146
开孔尺寸/Cutout (mm)	95*95
功率/Power (W)	25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
95*95





基本参数/Parameters

产品型号/Model	KX 3180-95-方/Square
产品尺寸/Size (mm)	105*H146 130*130*H146
开孔尺寸/Cutout (mm)	95*95
功率/Power (W)	30W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
95*95



i.SHA
THE ULTIMATE LIGHTING SOLUTION

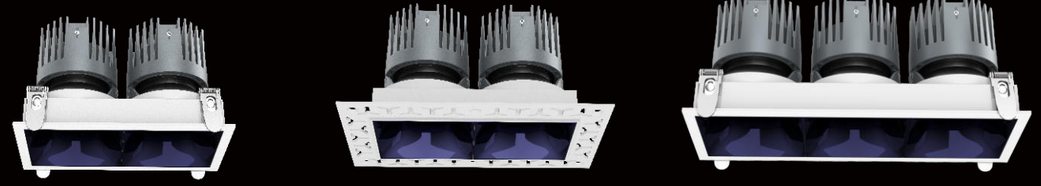

High-Efficiency Spostlight Series

KX 3180 高光效射灯系列

i.ka 依嘉系列

替换防眩罩/Anti-glare reflector cup





i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3180-55-方/Square
产品尺寸/Size (mm)	115*65*H85 135*85*H85
开孔尺寸/Cutout (mm)	105*55
功率/Power (W)	8W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
105*55





基本参数/Parameters

产品型号/Model	KX 3180-75-方/Square
产品尺寸/Size (mm)	155*85*H98 185*115*H98
开孔尺寸/Cutout (mm)	145*75
功率/Power (W)	12W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
145*75





基本参数/Parameters

产品型号/Model	KX 3180-95-方/Square
产品尺寸/Size (mm)	195*105*H146 220*130*H146
开孔尺寸/Cutout (mm)	185*95
功率/Power (W)	25W*2
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
185*95





基本参数/Parameters

产品型号/Model	KX 3180-75-方/Square
产品尺寸/Size (mm)	225*85*H98 295*85*H98
开孔尺寸/Cutout (mm)	215*75 285*75
功率/Power (W)	12W*3 12W*4
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout 215*75



开孔/Cutout 285*75



i.SHA
THE ULTIMATE LIGHTING SOLUTION

KX 3299 Lumi 微光系列
小灯体大瓦数射灯系列
Small lamp body high wattage

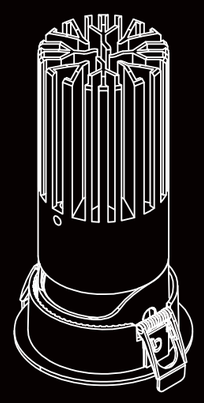

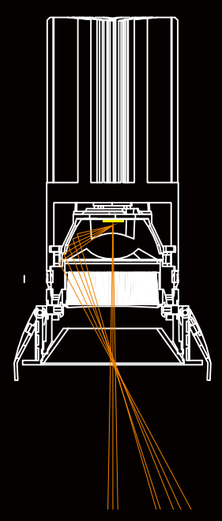

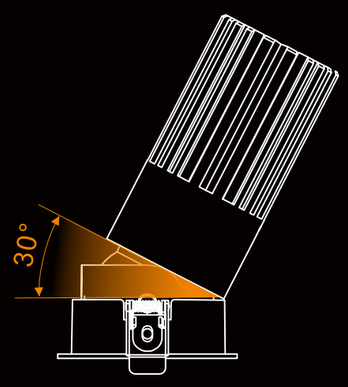

i.SHA
THE ULTIMATE LIGHTING SOLUTION

Embedded large optical high-brightness lenses
The glow is natural and soft.
内嵌光学大透镜
发光自然柔和



Enhanced heat dissipation efficiency, thickened and lengthened, all-aluminum heat dissipation
散热效率提升
加厚加长全铝散热









i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3299-35-圆/Round
产品尺寸/Size (mm)	φ40*H80　Φ62*H80
开孔尺寸/Cutout (mm)	Φ35
功率/Power (W)	7W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15°　24°　38°　50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ35





基本参数/Parameters

产品型号/Model	KX 3299-45-圆/Round
产品尺寸/Size (mm)	φ50*H98　Φ70*H98
开孔尺寸/Cutout (mm)	Φ45
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15°　24°　38°　50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ45







基本参数/Parameters

产品型号/Model	KX 3299-55-圆/Round
产品尺寸/Size (mm)	φ62*H120　φ75*H120 Φ85*H120　L90*H120
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	15W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15°　24°　38°　50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ55







基本参数/Parameters

产品型号/Model	KX 3299-65-圆/Round
产品尺寸/Size (mm)	φ72*H125　φ85*H125 φ90*H125　L125*H125
开孔尺寸/Cutout (mm)	Φ65
功率/Power (W)	18W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15°　24°　38°　50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ65



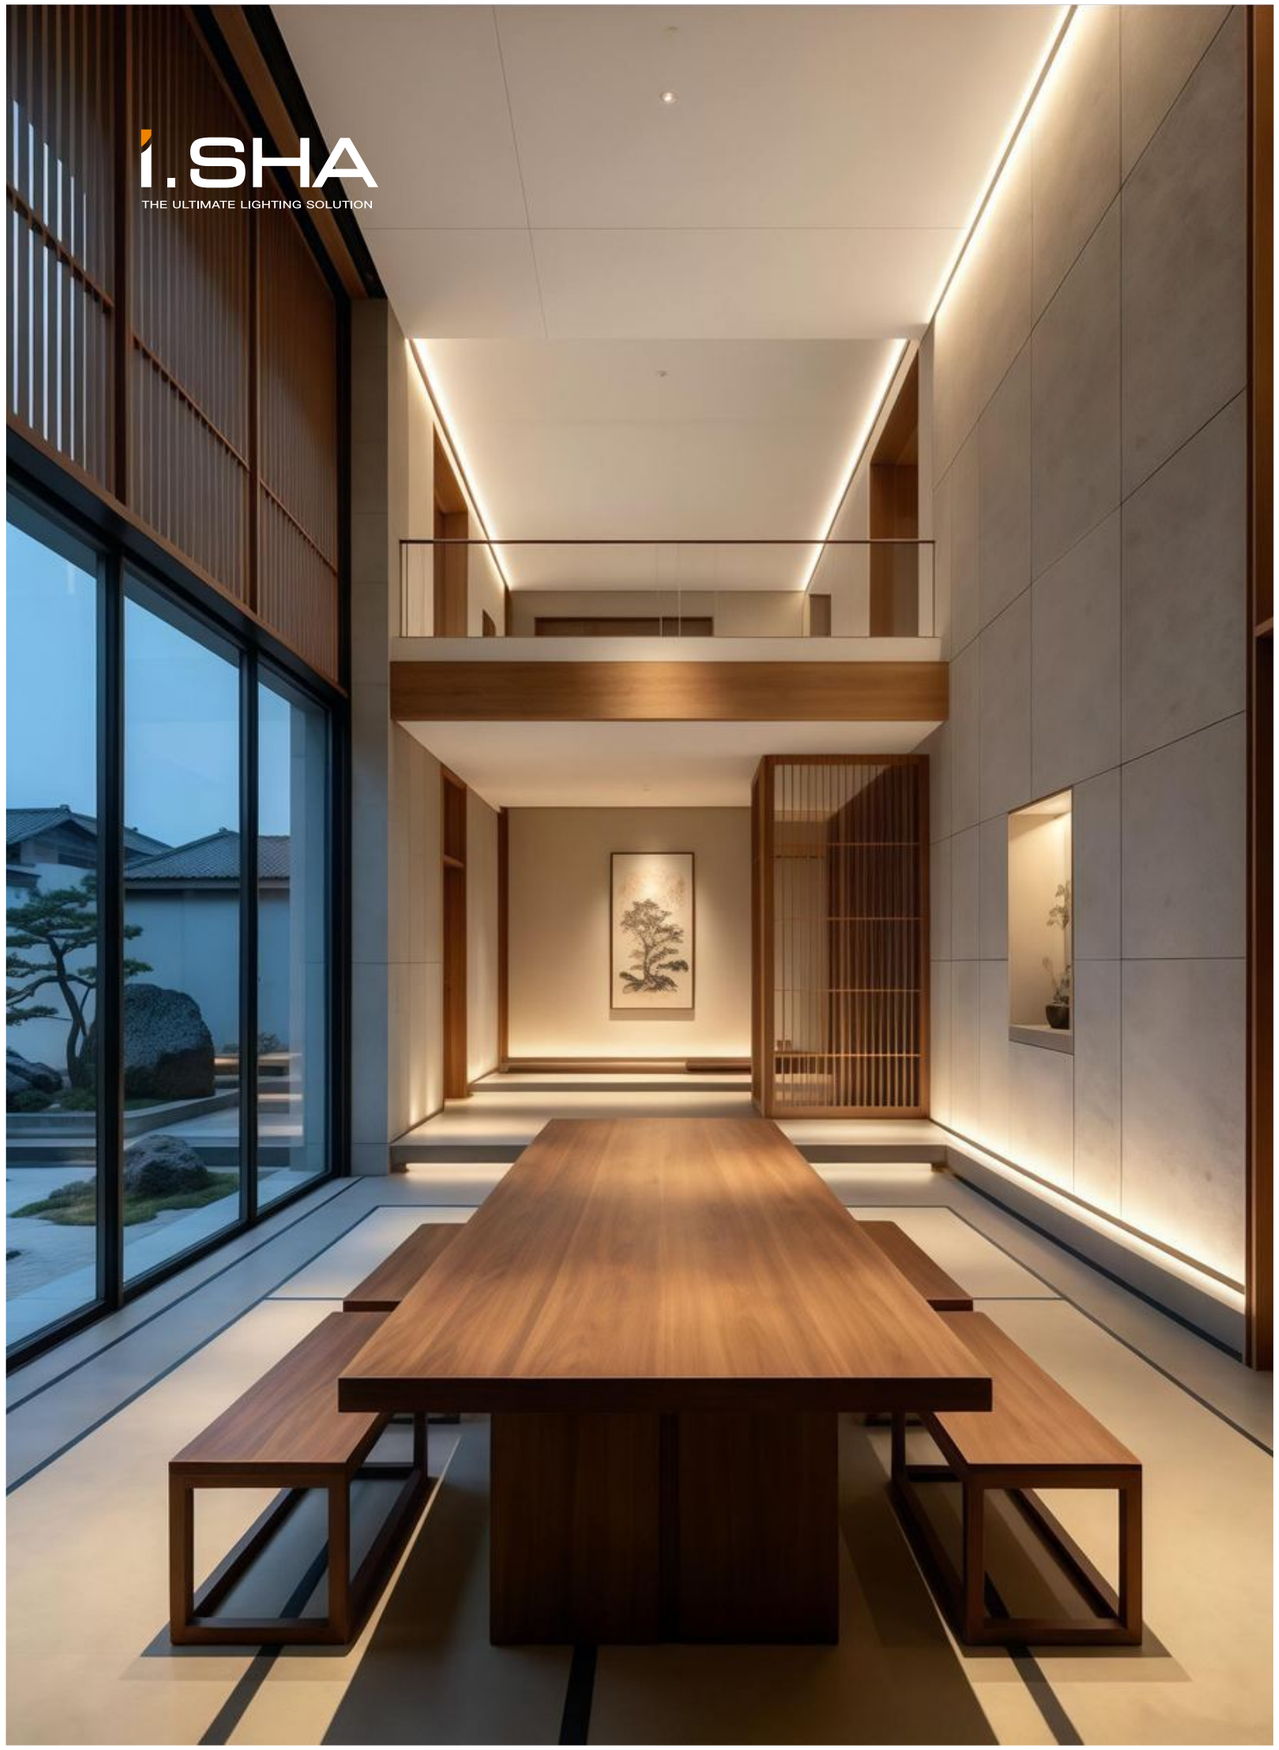

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3299-75-圆/Round
产品尺寸/Size (mm)	ϕ82*H160 ϕ95*H160 Φ 100*H160 L135*H160
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	30W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	KX 3299-95-圆/Round
产品尺寸/Size (mm)	ϕ108*H155 ϕ120*H155 Φ 120*H155 L164*H155
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	35W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95





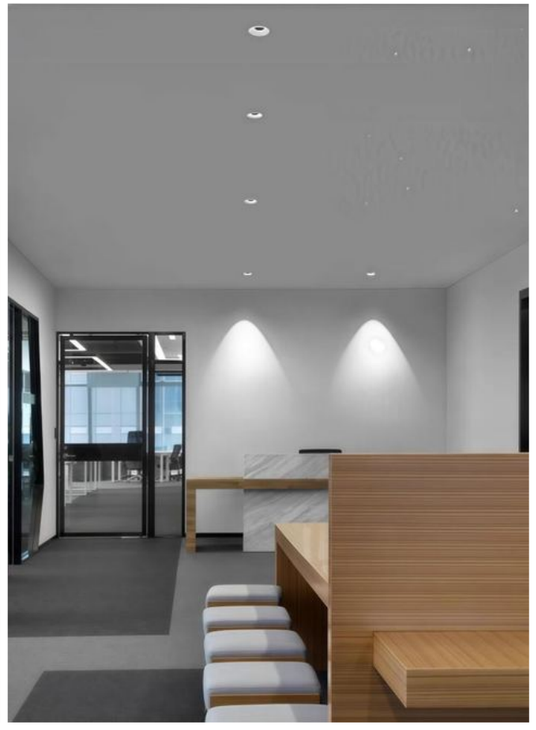

i.SHA
THE ULTIMATE LIGHTING SOLUTION

KX 3131 Ruby 落瑾系列
SPOTLIGHT
深防眩 | 高功率





基本参数/Parameters

产品型号/Model	KX 3131 35-圆/Round
产品尺寸/Size (mm)	ϕ40*76.5H
开孔尺寸/Cutout (mm)	ϕ35
功率/Power (W)	7W
光学配置/Holder	1304
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX 3131 45-圆/Round
产品尺寸/Size (mm)	ϕ50*88.5H
开孔尺寸/Cutout (mm)	ϕ45
功率/Power (W)	10W
光学配置/Holder	1304
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION



Product Breakdown Diagram
产品分解实物图



i.SHA
THE ULTIMATE LIGHTING SOLUTION

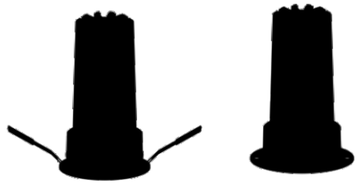

基本参数/Parameters

产品型号/Model	KX 3131 55-圆/Round
产品尺寸/Size (mm)	ϕ62*106.5H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	8-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55



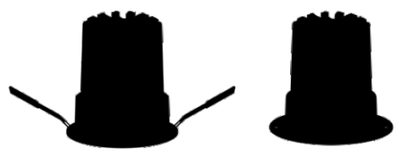

基本参数/Parameters

产品型号/Model	KX 3131 75-圆/Round
产品尺寸/Size (mm)	ϕ82*88H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75



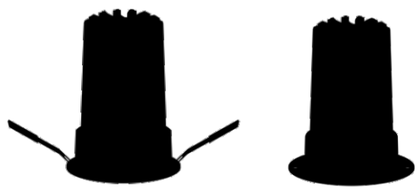

基本参数/Parameters

产品型号/Model	KX 3131 75-圆/Round
产品尺寸/Size (mm)	ϕ82*115H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	15-20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75



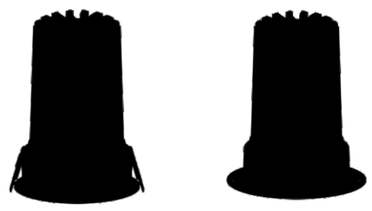

基本参数/Parameters

产品型号/Model	KX 3131 95-圆/Round
产品尺寸/Size (mm)	ϕ105*146H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	20-30W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95



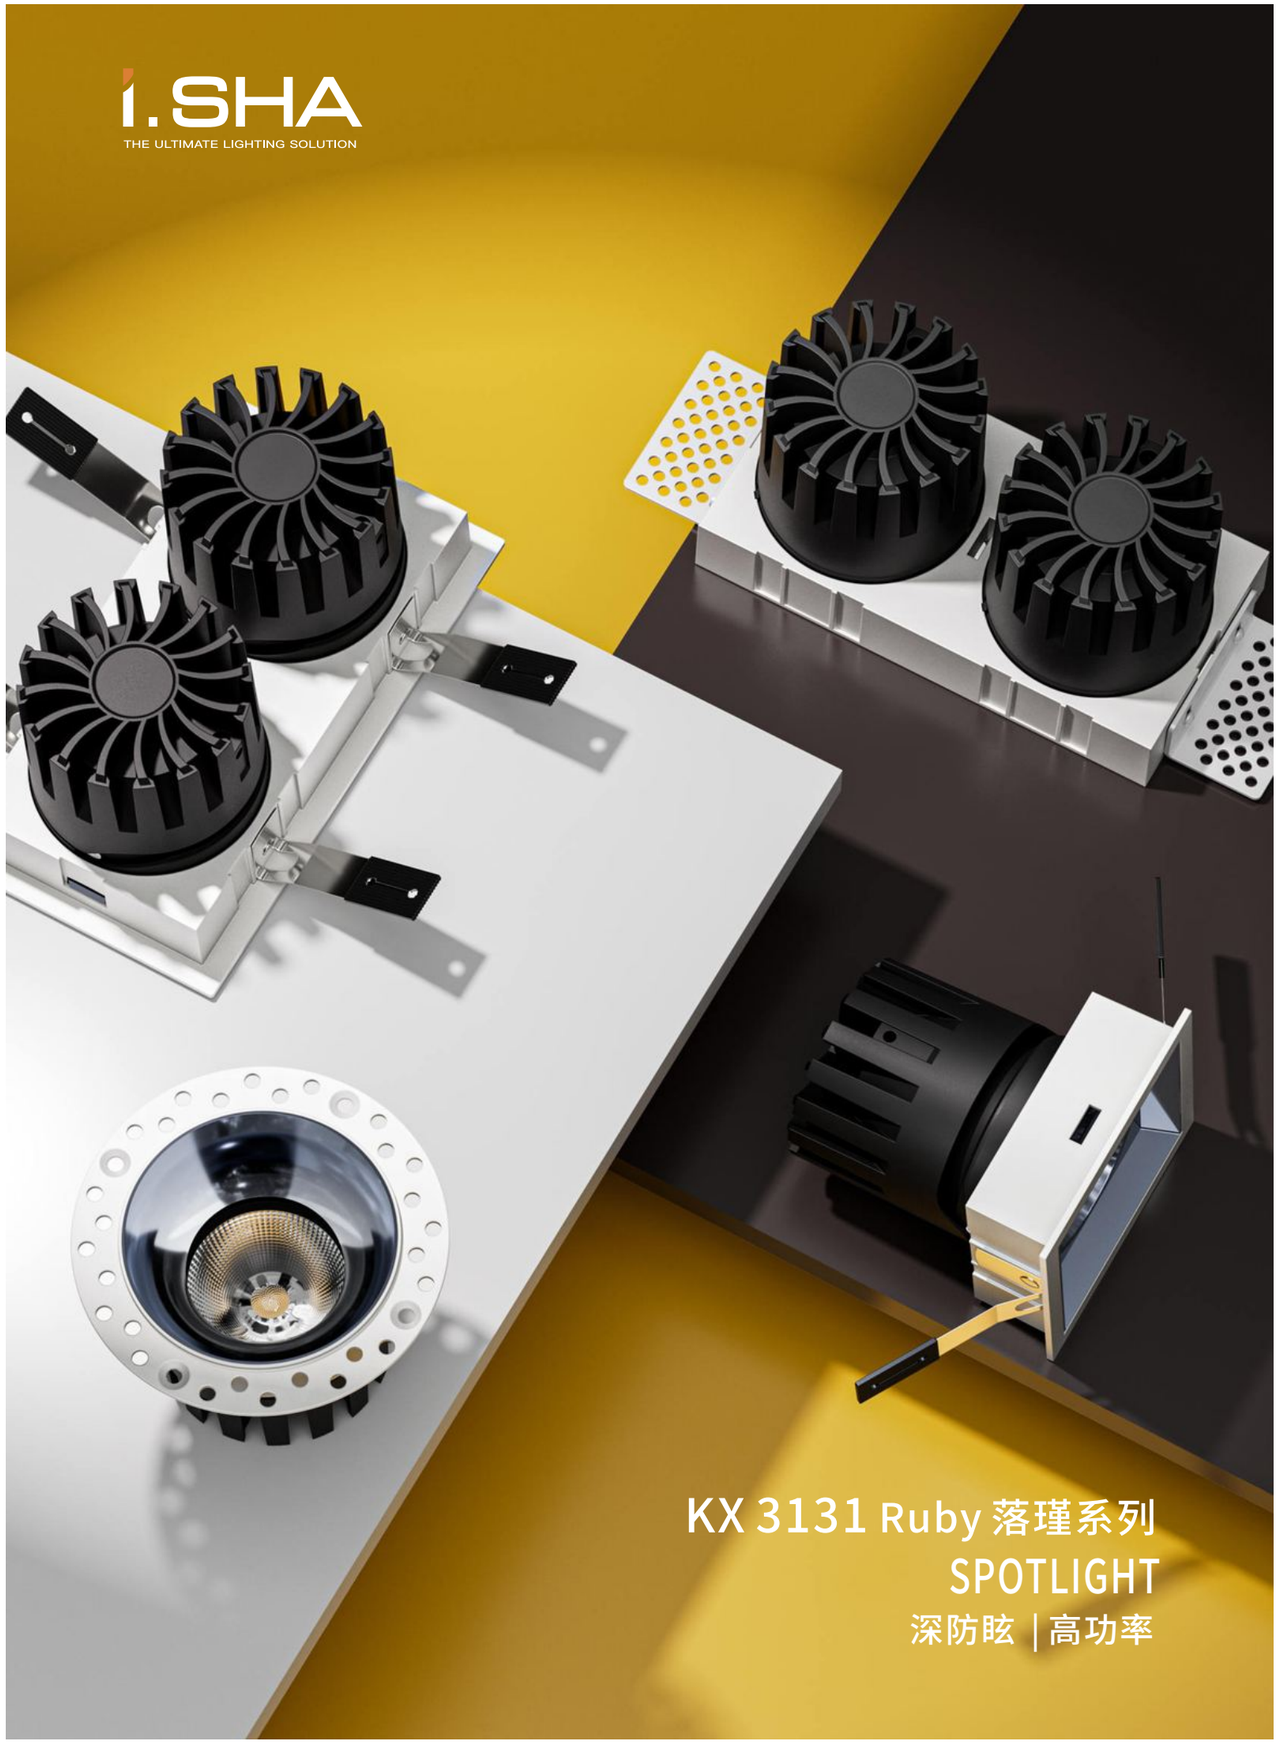

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3131 55-方/Square
产品尺寸/Size (mm)	62*62*106.5H
开孔尺寸/Cutout (mm)	55*55
功率/Power (W)	8-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
55*55





基本参数/Parameters

产品型号/Model	KX 3131 110*55-方/Square
产品尺寸/Size (mm)	62*115.5*106.5H
开孔尺寸/Cutout (mm)	110*55
功率/Power (W)	10-12W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
110*55





基本参数/Parameters

产品型号/Model	KX 3131 75-方/Square
产品尺寸/Size (mm)	82*82*88H
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
75*75





基本参数/Parameters

产品型号/Model	KX 3131 150*75-方/Square
产品尺寸/Size (mm)	158*82*88H
开孔尺寸/Cutout (mm)	150*75
功率/Power (W)	10-12W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
150*75



i.SHA
THE ULTIMATE LIGHTING SOLUTION

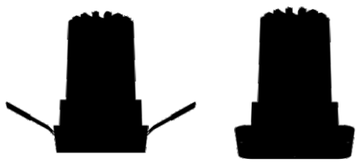

基本参数/Parameters

产品型号/Model	KX 3131 75-方/Square
产品尺寸/Size (mm)	82*82*115H
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	15-20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	砂白/Matte White 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
75*75







基本参数/Parameters

产品型号/Model	KX 3131 150*75-方/Square
产品尺寸/Size (mm)	82*158*115H
开孔尺寸/Cutout (mm)	150*75
功率/Power (W)	15-20W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	砂白/Matte White 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
150*75





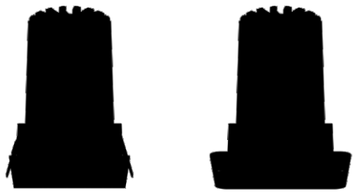

基本参数/Parameters

产品型号/Model	KX 3131 95-方/Square
产品尺寸/Size (mm)	102.5*102.5*146H
开孔尺寸/Cutout (mm)	95*95
功率/Power (W)	20-30W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	砂白/Matte White 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
95*95





基本参数/Parameters

产品型号/Model	KX 3131 190*95-方/Square
产品尺寸/Size (mm)	197*5*102.5*146H
开孔尺寸/Cutout (mm)	190*95
功率/Power (W)	20-30W*2
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	砂白/Matte White 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
190*95



i.SHA
THE ULTIMATE LIGHTING SOLUTION





安装效果图



i.SHA
THE ULTIMATE LIGHTING SOLUTION

IP 54

AC 9292 i.Meng依萌模组系列
Modular Series Spotlight

Round Narrow Edge/圆窄边
Round Wide Edge/圆宽边
Round Boundless/圆无边
Round Aircraft Wing Circle Without Edges/圆飞机翼无边

i.SHA
THE ULTIMATE LIGHTING SOLUTION

IP65防水模组/IP65 Waterproof Module


55防水模组
55 Waterproof Module


65防水模组
65 Waterproof Module


75防水模组
75 Waterproof Module


95防水模组
95 Waterproof Module

30°可调中环/30° Adjustable Front Ring


铝
Aluminium


PC



刻度可调节
Internally adjustable scale

面环款式/Face Ring Style


窄边弹夹款
Narrow Edge FMagazine style


宽边弹夹款
Wide Ring Magazine style


沉台款无边框
Sink style without borders


窄边弹片款
Narrow Edge Shrapnel style


宽边弹片款
Wide Ring Shrapnel style


飞机翼圆无边
Aircraft wing circle without edges

可选防眩反光杯/Anti-glare Cup Color Options

PC款防眩杯/
PC Anti Glare Cup


枪黑
Gun Black


亮银
Bright Sliver


亚黑
Matte Black


亚白
Matte White


金色
Golden

铝合金款直面防眩杯/
Aluminum Alloy Straight Anti Glare Cup


枪黑
Gun Black


亮银
Bright Sliver


亚黑
Matte Black


亚白
Matte White


金色
Golden

铝合金款弧面防眩杯/
Aluminum Alloy Curved Anti Glare Cup


枪黑
Gun Black


亮银
Bright Sliver


亚黑
Matte Black


亚白
Matte White


金色
Golden

i.SHA
THE ULTIMATE LIGHTING SOLUTION



AC 9292 依萌系列
SPOTLIGHT

圆窄边/Round Narrow Edge
圆宽边/Round Wide Edge
圆无边/Round Boundless
圆飞机翼无边/ Round Aircraft Wing Circle Without Edges

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9292 55-圆/Round
产品尺寸/Size (mm)	ϕ62*85H ϕ75*85H L92.5*85H ϕ80*85H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	6-9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9292 65-圆/Round
产品尺寸/Size (mm)	ϕ72*89H ϕ85*89H L108*89H ϕ90*89H
开孔尺寸/Cutout (mm)	ϕ65
功率/Power (W)	7-10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9292 75-圆/Round
产品尺寸/Size (mm)	ϕ82*98H ϕ95*98H L120*98H ϕ100*98H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9292 95-圆/Round
产品尺寸/Size (mm)	ϕ108*123H ϕ120*123H L160*123H ϕ120*123H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	20-25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION

POLARIZED WALL WASH LAMP
偏光洗墙灯系列
AC 9293 光辉系列





Ø55mm



Ø75mm



Ø95mm

POLARIZED WALL WASH LAMP
偏光洗墙灯系列
AC 9293 Glorious Series / 光辉系列

Diverse sizes多样规格：

Ceiling openings cover 55/75/95mm
天花开孔：55/75/95mm

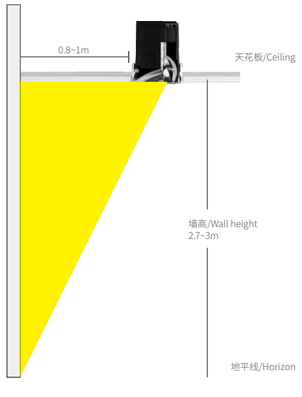

FACE RING STYLE
面环款式



Narrow Edge FMagazine style
窄边弹夹款



Narrow Edge Shrapnel style
窄边弹片款



Wide Ring Magazine style
宽边弹夹款



Wide Ring Shrapnel style
宽边弹片款



Sink style without borders
沉台款无边框



Aircraft wing circle without edges
飞机翼圆无边

PRODUCT ADVANTAGES
产品优势

Low glare and high luminous efficiency:
低眩光高光效：

Specially designed free-form curved surface reflector cup with anti-glare cover, precise light path active anti-glare, high light output efficiency
特殊设计自由曲面反光杯加防眩罩，精准光路主动防眩，出光效率高

Super strong mixing and optical rotation performance:
超强混旋旋光性能：

Unique micro-scale armor checkered pattern ensures uniform mixing of both single-color and dual-color temperatures
独特微鳞甲格纹，单色和双色温混光均匀

No dark area wall cleaning light spot:
无暗区洗墙光斑：

The starting light spot for wall cleaning is aligned with the top of the ceiling
洗墙起始光斑与天花板顶端切齐，全广角无暗区

Multi-lamp spliced wall cleaning excellent:
多盏拼接洗墙佳：

It can be seamlessly spliced for wall cleaning,with uniform light spot transition and no bright or dark stripes
可无缝拼接洗墙，光斑均匀过渡，无亮暗条纹

Superior materials:
材料更优：

High-temperature resistant materials, the reflector cup can withstand a maximum temperature of 140°C
高耐温材料，反光杯最高耐温140°C

i.SHA
THE ULTIMATE LIGHTING SOLUTION







基本参数/Parameters

产品型号/Model	AC 9293 55-圆/Round
产品尺寸/Size (mm)	ϕ62*78H ϕ75*78H L92.5*78H ϕ80*78H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	6-9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	WALL WASH



产品尺寸图/Dimension (mm)

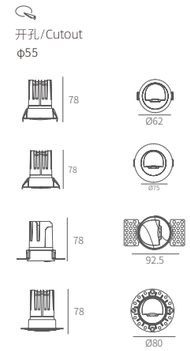





基本参数/Parameters

产品型号/Model	AC 9293 75-圆/Round
产品尺寸/Size (mm)	ϕ82*91H ϕ95*91H L130*91H ϕ100*91H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	12-15W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	WALL WASH



产品尺寸图/Dimension (mm)







基本参数/Parameters

产品型号/Model	AC 9292 95-圆/Round
产品尺寸/Size (mm)	ϕ108*103H ϕ120*103H L160*103H ϕ120*103H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	20-25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	WALL WASH



产品尺寸图/Dimension (mm)

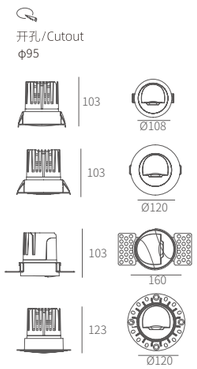

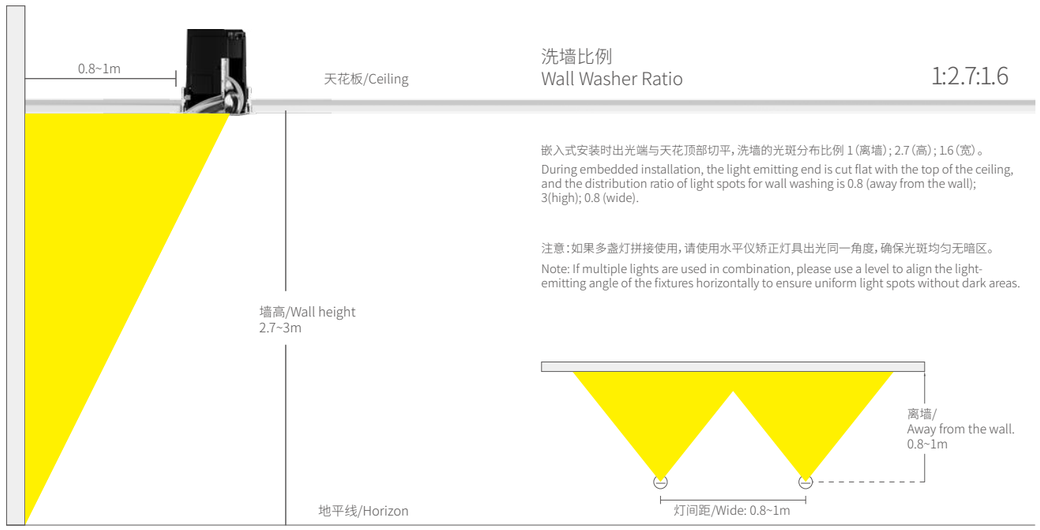

洗墙比例
Wall Washer Ratio

1:2.7:1.6

嵌入式安装时出光端与天花顶部切平，洗墙的光斑分布比例 1（离墙）; 2.7（高）; 1.6（宽）。

During embedded installation, the light emitting end is cut flat with the top of the ceiling, and the distribution ratio of light spots for wall washing is 0.8 (away from the wall); 3(high); 0.8 (wide).

注意：如果多盏灯拼接使用，请使用水平仪矫正灯具出光同一角度，确保光斑均匀无暗区。

Note: If multiple lights are used in combination, please use a level to align the light-emitting angle of the fixtures horizontally to ensure uniform light spots without dark areas.

i.SHA
THE ULTIMATE LIGHTING SOLUTION

AC 9294 Aurora雏影系列
SPOTLIGHT

Round Narrow Edge/圆窄边
Round Wide Edge/圆宽边
Round Boundless/圆无边
Round Aircraft Wing Circle Without Edges/圆飞机翼无边





i.SHA
THE ULTIMATE LIGHTING SOLUTION



Anti-glare Cup Color Options/可选防眩反光杯

PC款防眩杯/PC Anti Glare Cup	枪黑 Gun Black	亮银 Bright Sliver	亚黑 Matte Black	亚白 Matte White	金色 Golden
铝合金款直面防眩杯 Aluminum Alloy Straight Anti Glare Cup	枪黑 Gun Black	亮银 Bright Sliver	亚黑 Matte Black	亚白 Matte White	金色 Golden
铝合金款弧面防眩杯 Aluminum Alloy Curved Anti Glare Cup	枪黑 Gun Black	亮银 Bright Sliver	亚黑 Matte Black	亚白 Matte White	金色 Golden

Aluminum Alloy Curved Anti Glare Cup/铝合金款弧面防眩杯

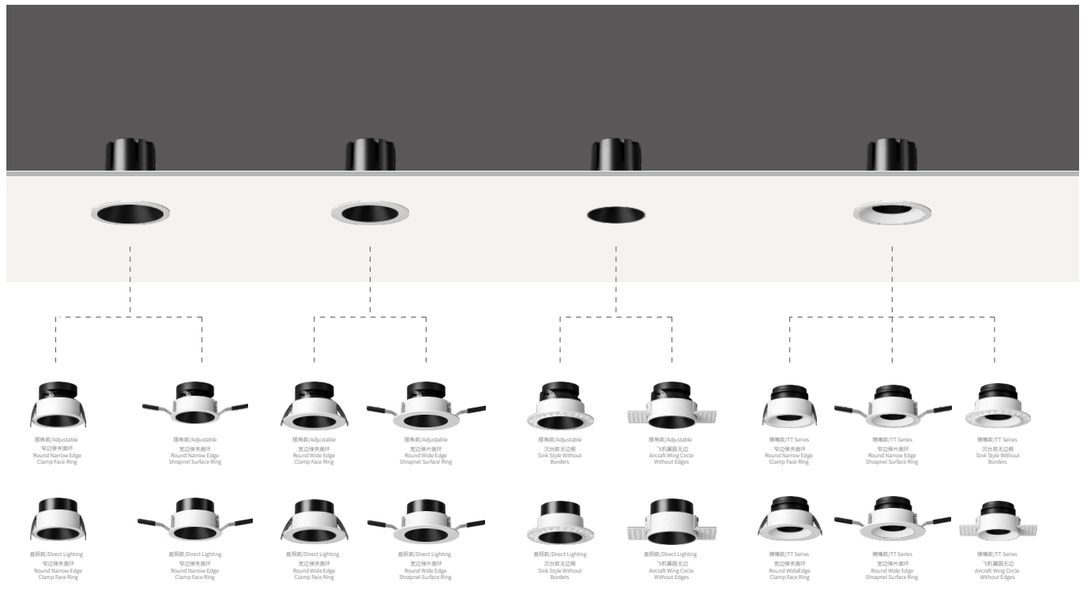

i.SHA
THE ULTIMATE LIGHTING SOLUTION



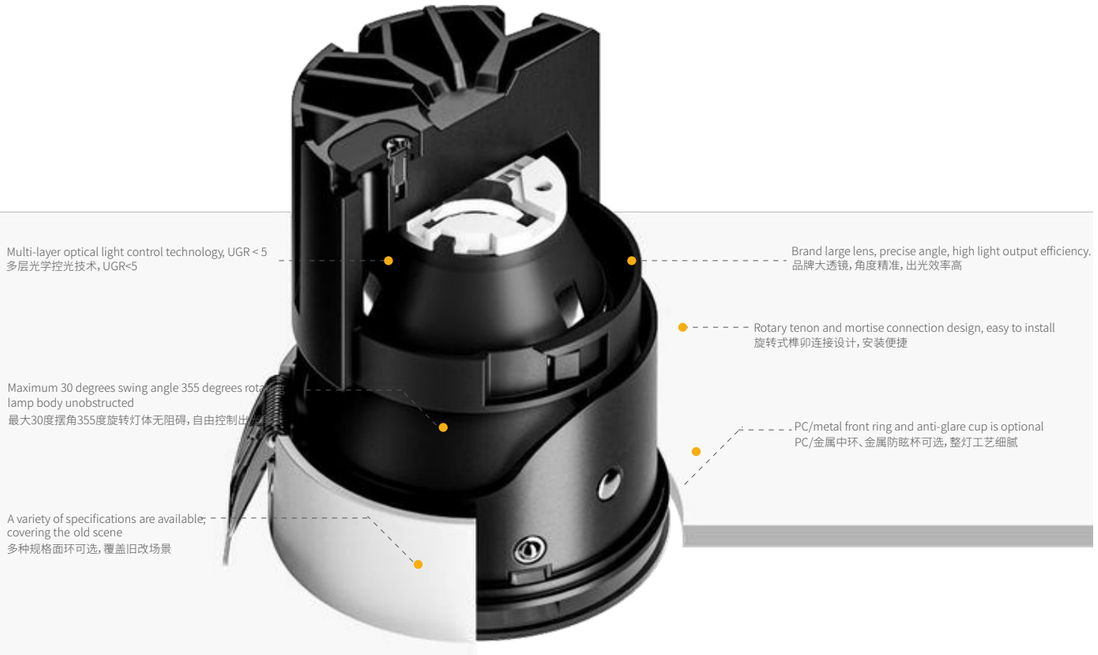

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9294 55-圆/Round
产品尺寸/Size (mm)	ϕ62*85H ϕ75*85H L92.5*85H ϕ80*85H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	6-9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	AC 9294 55-圆/Round
产品尺寸/Size (mm)	ϕ62*100H ϕ75*100H L92.5*100H ϕ80*100H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	AC 9292 65-圆/Round
产品尺寸/Size (mm)	ϕ72*89H ϕ55*89H L108*89H ϕ90*89H
开孔尺寸/Cutout (mm)	ϕ65
功率/Power (W)	7-10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ65





基本参数/Parameters

产品型号/Model	AC 9292 75-圆/Round
产品尺寸/Size (mm)	ϕ82*90H ϕ95*90H L130*90H ϕ100*90H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75



i.SHA
THE ULTIMATE LIGHTING SOLUTION



Internally And Externally Equipped With Adjustable Scales
内外设有调节刻度/





基本参数/Parameters

产品型号/Model	AC 9294 75-圆/Round
产品尺寸/Size (mm)	ϕ82*120H ϕ95*120H L130*120H ϕ100*120H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	15-20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	AC 9294 95-圆/Round
产品尺寸/Size (mm)	ϕ82*122H ϕ95*122H L130*122H ϕ100*122H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	20-25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95



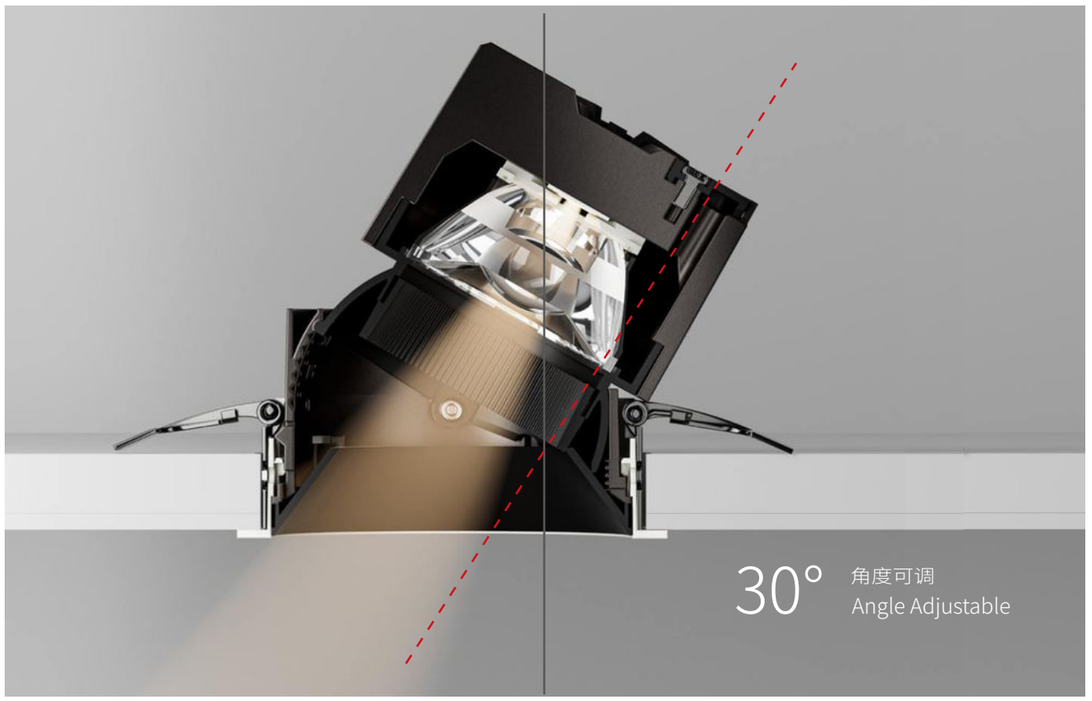

i.SHA
THE ULTIMATE LIGHTING SOLUTION

AC 9294 Auraro 雏影系列
直照款/Direct Lighting



i.SHA
THE ULTIMATE LIGHTING SOLUTION

Product Structure Analysis Diagram
产品结构分析图

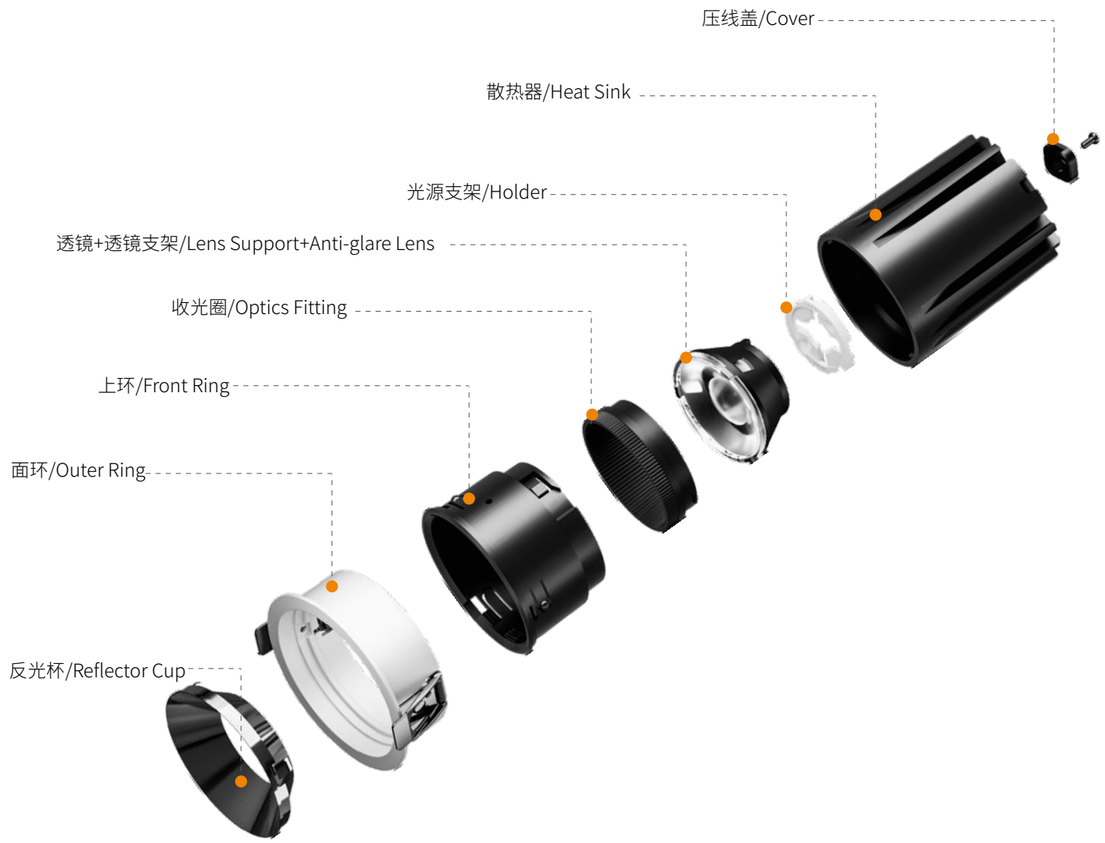

直照款/Direct Lighting



低眩光高光效：
Low glare and high luminous efficiency:

筒灯直照设计增加防眩罩，精准光路主动防眩，出光效率高
Sdirect illumination design of the downlight is enhanced with a glare shield.
The precise light path features active glare prevention, resulting in high light output efficiency

i.SHA
THE ULTIMATE LIGHTING SOLUTION





基本参数/Parameters

产品型号/Model	AC 9294 55-圆/Round
产品尺寸/Size (mm)	ϕ62*81H ϕ75*81H L92.5*81H ϕ80*81H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	6-9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	AC 9294 55-圆/Round
产品尺寸/Size (mm)	ϕ62*96H ϕ75*96H L92.5*96H ϕ80*96H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9292 65-圆/Round
产品尺寸/Size (mm)	ϕ72*82H ϕ85*82H L108*82H ϕ90*82H
开孔尺寸/Cutout (mm)	ϕ65
功率/Power (W)	7-10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ65





基本参数/Parameters

产品型号/Model	AC 9292 75-圆/Round
产品尺寸/Size (mm)	ϕ82*90H ϕ95*90H L130*90H ϕ100*90H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	AC 9294 75-圆/Round
产品尺寸/Size (mm)	ϕ82*114H ϕ95*114H L130*114H ϕ100*114H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	15-20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	AC 9294 95-圆/Round
产品尺寸/Size (mm)	ϕ82*112H ϕ95*112H L130*112H ϕ100*112H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	20-25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95



i.SHA
THE ULTIMATE LIGHTING SOLUTION



Mirror Headlights
Small Hole Light Output
镜前灯/小孔出光

AC 9294 Aurora 雏影系列

i.SHA
THE ULTIMATE LIGHTING SOLUTION

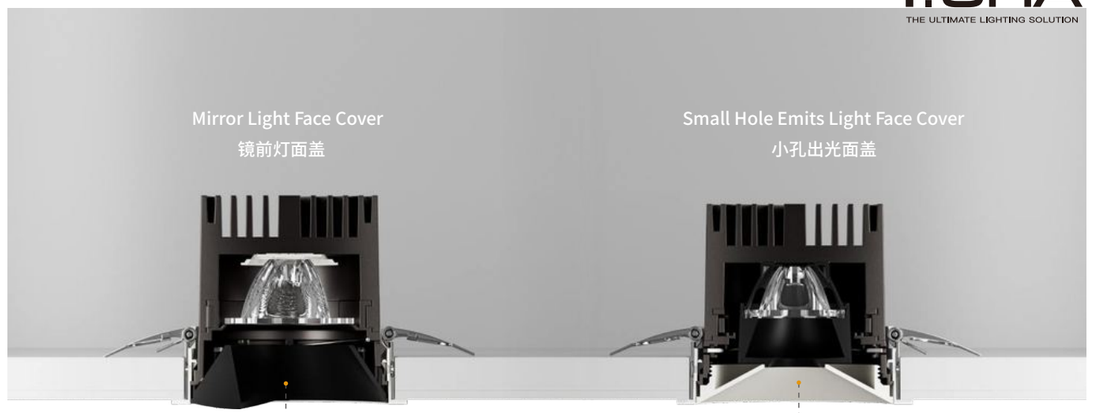



亚白
Matte White

亚黑
Matte Black

枪黑
Gun Black

台阶纹哑白
Step Pattern Matte White

亚白
Matte White





基本参数/Parameters

产品型号/Model	AC 9294 75-圆/Round
产品尺寸/Size (mm)	ϕ82*68H ϕ95*68H L130*87H ϕ100*87H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	8-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15°（朝人/At People） 35°（朝镜子/At Mirror）

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75







基本参数/Parameters

产品型号/Model	AC 9294 75-圆/Round
产品尺寸/Size (mm)	ϕ82*84H ϕ95*84H L130*84H ϕ100*84H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 36°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





i.SHA
THE ULTIMATE LIGHTING SOLUTION

Product Structure Analysis Diagram
产品结构分析图





Pig Mouth Spotlight/猪嘴射灯

Wherever the light reaches, it creates a focal point:
光到之处 尽是焦点：

The design of the pig's Mouth is more focused, with precise beams, a narrowing opening to prevent glare, and high light output efficiency
猪嘴设计更加聚焦，精准光束，收口防眩，出光效率高



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9294 75-圆/Round
产品尺寸/Size (mm)	ϕ82*87H ϕ95*87H L130*90H ϕ100*90H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	8-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75













基本参数/Parameters

产品型号/Model	AC 9294 75-圆/Round
产品尺寸/Size (mm)	ϕ82*117H ϕ95*117H L130*117H ϕ100*117H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	15-20W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75











i.SHA
THE ULTIMATE LIGHTING SOLUTION

KX 3106 Yueying悦影系列
LED SPOTLIGHT

High lumen | Strong anti-glare protection | Full-angle coverage
Small lamp body with high wattage | DIY installation
高流明 | 深防眩 | 全角度 | 小灯体大瓦数 | DIY安装



贴面设计



极窄边框



超宽散热面积



深防眩高光效



超大功率

i.SHA
THE ULTIMATE LIGHTING SOLUTION



Cold-forged 1070 ultra-high thermal conductivity material
冷锻1070超高导热材质

Precise Aluminum Central Ring
精工铝中环

Die-cast aluminum Ring
压铸铝面环





Removable PC Components
可拆卸PC 防眩罩



Edgeless ring
无边框

Color 面环颜色

白(常规) White
黑(常规) Black
亮银 Silvery
枪黑 Gun black
金色 Satin Nickel

Reflector color optional 反射器可选颜色

哑黑(常规) Black
哑白(常规) White
黑色 Black
亮银 Silvery
枪黑 Gun black

KX 3106 Yueying悦影系列
LED SPOTLIGHT

i.SHA
THE ULTIMATE LIGHTING SOLUTION

基本参数/Parameters

产品型号/Model	KX 3106 45-圆/Round		功率/Power (W)	8W 12W
产品尺寸/Size (mm)	ϕ53*80H	ϕ53*118H	光学配置/Holder	1304/020
开孔尺寸/Cutout (mm)	ϕ45		防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black		光学角度/Beam Angle (°)	10° 15° 24° 36° 55°

产品尺寸图/Dimension (mm)
开孔/Cutout 45mm



基本参数/Parameters

产品型号/Model	KX 3106 55-圆/Round		功率/Power (W)	10W 15W
产品尺寸/Size (mm)	ϕ63*105H	ϕ63*125H	光学配置/Holder	1304/1507
开孔尺寸/Cutout (mm)	ϕ55		防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black		光学角度/Beam Angle (°)	10° 15° 24° 36° 55°

产品尺寸图/Dimension (mm)
开孔/Cutout 55mm



基本参数/Parameters

产品型号/Model	KX 3106 65-圆/Round		功率/Power (W)	15W 20W
产品尺寸/Size (mm)	ϕ73*105H	ϕ73*135H	光学配置/Holder	1304/1507
开孔尺寸/Cutout (mm)	ϕ65		防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black		光学角度/Beam Angle (°)	10° 15° 24° 36° 55°

产品尺寸图/Dimension (mm)
开孔/Cutout 65mm



基本参数/Parameters

产品型号/Model	KX 3106 75-圆/Round		功率/Power (W)	15W 20W
产品尺寸/Size (mm)	ϕ83*105H	ϕ83*150H	光学配置/Holder	1304/1507
开孔尺寸/Cutout (mm)	ϕ75		防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black		光学角度/Beam Angle (°)	10° 15° 24° 36° 55°

产品尺寸图/Dimension (mm)
开孔/Cutout 75mm



基本参数/Parameters

产品型号/Model	KX 3106 95-圆/Round		功率/Power (W)	30W 45W
产品尺寸/Size (mm)	ϕ108*120H	ϕ108*170H	光学配置/Holder	1507/1816/1919
开孔尺寸/Cutout (mm)	ϕ95		防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black		光学角度/Beam Angle (°)	10° 15° 24° 36° 55°

产品尺寸图/Dimension (mm)
开孔/Cutout 95mm



基本参数/Parameters

产品型号/Model	KX 3106 115-圆/Round		功率/Power (W)	60W 70W
产品尺寸/Size (mm)	ϕ130*155H	ϕ130*170H	光学配置/Holder	1507/1816/1919
开孔尺寸/Cutout (mm)	ϕ115		防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black		光学角度/Beam Angle (°)	10° 15° 24° 36° 55°

产品尺寸图/Dimension (mm)
开孔/Cutout 95mm 115mm



i.SHA
THE ULTIMATE LIGHTING SOLUTION



Cold-forged 1070 ultra-high thermal conductivity material
冷锻1070超高导热材质

Precise Aluminum Central Ring
精工铝中环

CNC aluminum Ring
CNC面环



Narrow ring
窄边框



Edgeless ring
无边框

Color 面环颜色

白(常规) White
黑(常规) Black
亮银 Silvery
枪黑 Gun black
金色 Satin Nickel

KX 3106 Yueying悦影系列
LED SPOTLIGHT

i.SHA
THE ULTIMATE LIGHTING SOLUTION

基本参数/Parameters

产品型号/Model	KX 3106 35-圆直照 /Round Fixed
产品尺寸/Size (mm)	ϕ42*70H ϕ42*105H
开孔尺寸/Cutout (mm)	ϕ35
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
功率/Power (W)	5W 9W
光学配置/Holder	1304
防水等级/IP Level	IP 20
光学角度/Beam Angle (°)	15° 24° 36°

产品尺寸图/Dimension (mm)

开孔/Cutout 35mm



基本参数/Parameters

产品型号/Model	KX 3106 40-圆直照 /Round Fixed
产品尺寸/Size (mm)	ϕ47*80H ϕ47*118H
开孔尺寸/Cutout (mm)	ϕ40
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
功率/Power (W)	8W 12W
光学配置/Holder	1304
防水等级/IP Level	IP 20
光学角度/Beam Angle (°)	10° 15° 24° 36°

产品尺寸图/Dimension (mm)

开孔/Cutout 40mm



基本参数/Parameters

产品型号/Model	KX 3106 45-圆直照 /Round Fixed
产品尺寸/Size (mm)	ϕ52*80H ϕ52*118H
开孔尺寸/Cutout (mm)	ϕ45
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
功率/Power (W)	8W 12W
光学配置/Holder	1304
防水等级/IP Level	IP 20
光学角度/Beam Angle (°)	15° 24° 36°

产品尺寸图/Dimension (mm)

开孔/Cutout 45mm



基本参数/Parameters

产品型号/Model	KX 3106 50-圆直照 /Round Fixed
产品尺寸/Size (mm)	ϕ57*90H ϕ42*115H
开孔尺寸/Cutout (mm)	ϕ50
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
功率/Power (W)	10W 15W
光学配置/Holder	1304*1507
防水等级/IP Level	IP 20
光学角度/Beam Angle (°)	10° 15° 24° 36°

产品尺寸图/Dimension (mm)

开孔/Cutout 50mm



基本参数/Parameters

产品型号/Model	KX 3106 55-圆直照 /Round Fixed
产品尺寸/Size (mm)	ϕ62*80H ϕ62*115H
开孔尺寸/Cutout (mm)	ϕ55
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
功率/Power (W)	10W 15W
光学配置/Holder	1304/1507
防水等级/IP Level	IP 20
光学角度/Beam Angle (°)	10° 15° 24° 36°

产品尺寸图/Dimension (mm)

开孔/Cutout 55mm



基本参数/Parameters

产品型号/Model	KX 3106 60-圆直照 /Round Fixed
产品尺寸/Size (mm)	ϕ67*92H ϕ67*120H
开孔尺寸/Cutout (mm)	ϕ60
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
功率/Power (W)	15W 20W
光学配置/Holder	1304/1507
防水等级/IP Level	IP 20
光学角度/Beam Angle (°)	10° 15° 24° 36°

产品尺寸图/Dimension (mm)

开孔/Cutout 60mm



基本参数/Parameters

产品型号/Model	KX 3106 65-圆直照 /Round Fixed
产品尺寸/Size (mm)	ϕ72*92H ϕ72*120H
开孔尺寸/Cutout (mm)	ϕ65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
功率/Power (W)	15W 20W
光学配置/Holder	1304*1507
防水等级/IP Level	IP 20
光学角度/Beam Angle (°)	10° 15° 24° 36°

产品尺寸图/Dimension (mm)

开孔/Cutout 65mm



i.SHA
THE ULTIMATE LIGHTING SOLUTION

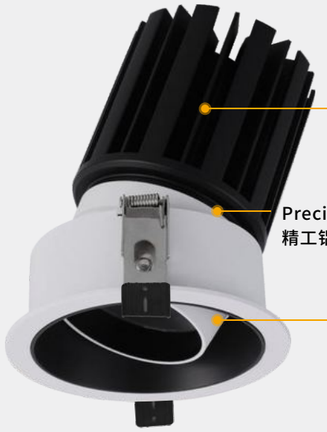

Cold-forged 1070 ultra-high thermal conductivity material
冷锻1070超高导热材质

Precise Aluminum Central Ring
精工铝中环

Cylindrical lens design for focusing light
牛眼聚光设计



High-efficiency optical lens
高光效光学透镜



Optional: German Aluminex reflective cup
可选配德国安铝反光杯

Color 面环颜色

白(常规) White

黑(常规) Black

亮银 Silvery

枪黑 Gun black

金色 Satin Nickel

BULL EYED CEILING LAMP
牛眼天花灯

KX 3106 Yueying悦影系列
LED SPOTLIGHT

i.SHA
THE ULTIMATE LIGHTING SOLUTION

基本参数/Parameters

产品型号/Model	KX 3106 75 /Round	功率/Power (W)	18W 28W
产品尺寸/Size (mm)	Φ42*70H Φ42*105H	光学配置/Holder	1507/1816/010
开孔尺寸/Cutout (mm)	Φ75	防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black	光学角度/Beam Angle (°)	15° 24° 36° 55°

产品尺寸图/Dimension (mm)

开孔/Cutout 75mm



基本参数/Parameters

产品型号/Model	KX 3106 95 /Round	功率/Power (W)	35W 45W
产品尺寸/Size (mm)	Φ108*120H Φ120*170H	光学配置/Holder	1507/1816/1919
开孔尺寸/Cutout (mm)	Φ95	防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black	光学角度/Beam Angle (°)	15° 24° 36° 55°

产品尺寸图/Dimension (mm)

开孔/Cutout 95mm



基本参数/Parameters

产品型号/Model	KX 3106 115 /Round	功率/Power (W)	60W 70W
产品尺寸/Size (mm)	Φ130*155H Φ130*170H	光学配置/Holder	1507/1816/1919
开孔尺寸/Cutout (mm)	Φ115	防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black	光学角度/Beam Angle (°)	15° 24° 36° 55°

产品尺寸图/Dimension (mm)

开孔/Cutout 115mm







i.SHA
THE ULTIMATE LIGHTING SOLUTION



Deep anti-glare | High power
深防眩 | 高功率 丨 防水防雾
AC 9268 Loy洛伊系列
UGR<9 IP 54



i.SHA
THE ULTIMATE LIGHTING SOLUTION





基本参数/Parameters

产品型号/Model	AC 9268 55-圆/Round
产品尺寸/Size (mm)	ϕ65*94H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	7-8W
光学配置/Holder	1304
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55







基本参数/Parameters

产品型号/Model	AC 9268 75-圆/Round
产品尺寸/Size (mm)	ϕ85*98H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75







基本参数/Parameters

产品型号/Model	AC 9268 75-圆/Round
产品尺寸/Size (mm)	ϕ85*98H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	15W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75







基本参数/Parameters

产品型号/Model	AC 9268 95-圆/Round
产品尺寸/Size (mm)	ϕ1105*113H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	15-18W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95



i.SHA
THE ULTIMATE LIGHTING SOLUTION



Deep anti-glare | High power

深防眩 | 高功率 丨 防水防雾

AC 9268 Loy洛伊系列

UGR<9 IP 54

i.SHA
THE ULTIMATE LIGHTING SOLUTION

Face ring 面环



Round face ring
圆形面环



Round Trimless ring
圆形预埋面环



Square face ring
方形面环



Square Trimless ring
方形预埋面环



Square double ring
方形双头面环



Square double Trimless ring
方形双头预埋面环

Reflective cup 防眩杯



Rose-gold
玫瑰金



Chrome
铬色



chrome-black
枪黑



Fog-silver
雾银



Matt-white
哑白



Matt-white
哑黑



U-shaped round cover
U-形罩



Square face ring
O-形罩



Polarizing Cup
偏光罩

Optical accessories 光学配件



Honeycomb
蜂窝网



Linear
拉伸片



Single asymmetric
单向偏光片



Double asymmetric
双向偏光片

i.SHA
THE ULTIMATE LIGHTING SOLUTION



AC 9351 SPOTLIGHT

深防眩 | 高功率 丨 小灯体大瓦数

Deep anti-glare | High power | Small lamp body with large wattage

UGR<9



ϕ55



ϕ75



ϕ95

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9351 55-圆/Round
产品尺寸/Size (mm)	ϕ62*100H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	12W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	AC 9351 75-圆/Round
产品尺寸/Size (mm)	ϕ83*105H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	18W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	AC 9351 95-圆/Round
产品尺寸/Size (mm)	ϕ105*120H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	25W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95



i.SHA
THE ULTIMATE LIGHTING SOLUTION

High-Efficiency Downlight Series

KX 3132系列

光束角 Beam angle :

15° 24° 36° 50°

Gun Black 枪黑

Bright Sliver 亮银

Fog Sliver 雾银

Golden 金色

Matte Black 亚黑

Matte White 亚白

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3132 75-圆/Round & 方/Square
产品尺寸/Size (mm)	ϕ85*59H 85*85*59
开孔尺寸/Cutout (mm)	ϕ75 75*75
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD:ϕ75 SQ:75*75





基本参数/Parameters

产品型号/Model	KX 3132 75*150-方/Square
产品尺寸/Size (mm)	L162.5*85*59H
开孔尺寸/Cutout (mm)	L150*75
功率/Power (W)	12W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
150*75





基本参数/Parameters

产品型号/Model	KX 3132 55-圆/Round & 方/Square
产品尺寸/Size (mm)	ϕ62.5*51H 62.5*62.5*51H
开孔尺寸/Cutout (mm)	ϕ55 55*55
功率/Power (W)	8W
光学配置/Holder	1304/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD: ϕ55 SQ:55*55





基本参数/Parameters

产品型号/Model	KX 3132 55*110-方/Square
产品尺寸/Size (mm)	L118.5*62.5*51H
开孔尺寸/Cutout (mm)	L110*55
功率/Power (W)	8W*2
光学配置/Holder	1304/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L110*55



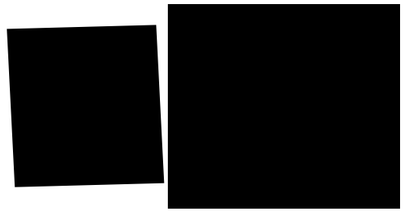

基本参数/Parameters

产品型号/Model	KX 3132 95-圆/Round & 方/Square
产品尺寸/Size (mm)	ϕ105*73H 105*105*73H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	20W
光学配置/Holder	1507/020/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95





基本参数/Parameters

产品型号/Model	KX 3132 95*190-方/Square
产品尺寸/Size (mm)	L201.2*105*73H
开孔尺寸/Cutout (mm)	L190*95
功率/Power (W)	20W*2
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L190*95



i.SHA
THE ULTIMATE LIGHTING SOLUTION

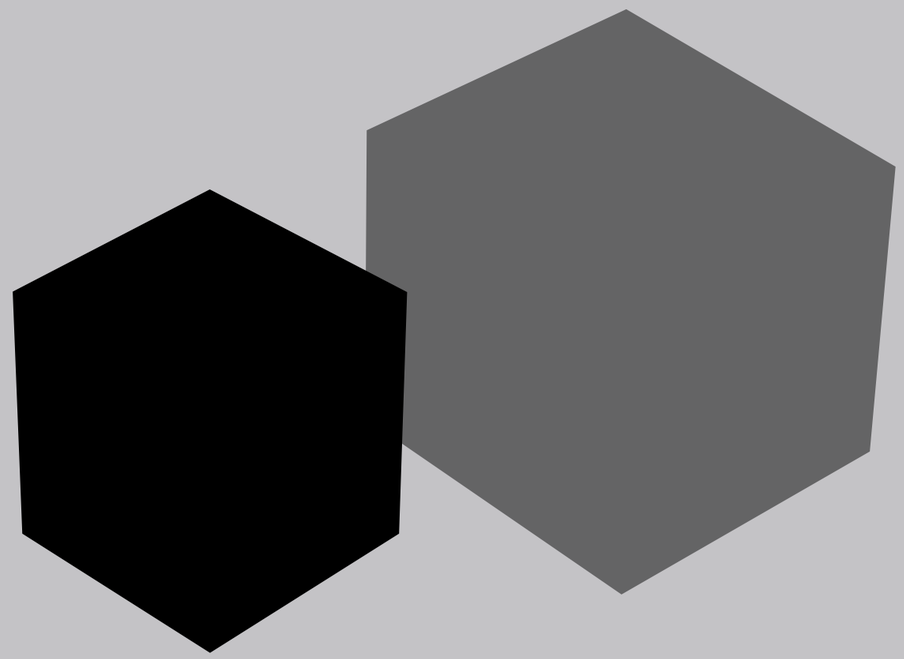

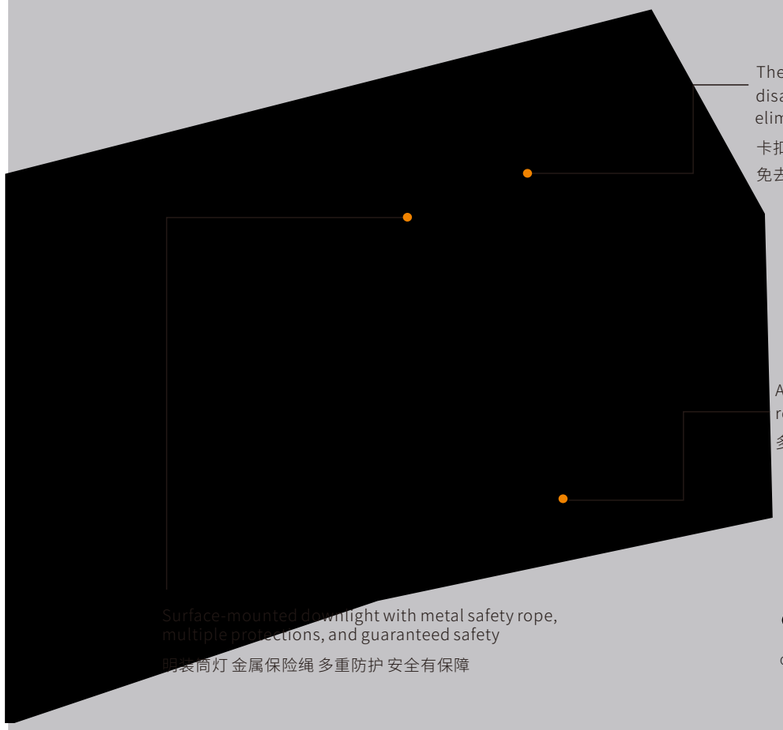

The snap-on spring clips are fixed,which enables efficient disassembly and assembly and convenient maintenance, eliminating the need to screw in screws and scratch the ceiling.

卡扣的弹片固定 高效拆装方便维修

免去拧螺丝刮伤天花板

Anti-glare covers of various colors, matched according to the requirements of different scenarios.

多种不同颜色的防眩罩，根据不同场景需求匹配

Surface-mounted downlight with metal safety rope, multiple protections, and guaranteed safety

明装筒灯 金属保险绳 多重防护 安全有保障

Anti-glare hood color防眩罩颜色：



Gun Black 枪黑 | Bright Sliver 亮银 | Fog Sliver 雾银 | Matte Black 亚黑 | Matte White 亚白 | Golden 金色

Received

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3132 圆/Round Surface
产品尺寸/Size (mm)	ϕ72*78H
开孔尺寸/Cutout (mm)	surface
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

Surface





基本参数/Parameters

产品型号/Model	KX 3132 圆/Round Surface
产品尺寸/Size (mm)	ϕ94*95H
开孔尺寸/Cutout (mm)	Surface
功率/Power (W)	20W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

Surface





基本参数/Parameters

产品型号/Model	KX 3132 方/Square Surface
产品尺寸/Size (mm)	72*72*78*H
开孔尺寸/Cutout (mm)	Surface
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

Surface





基本参数/Parameters

产品型号/Model	KX 3132 91*91-方/Square Surface
产品尺寸/Size (mm)	91*91*95H
开孔尺寸/Cutout (mm)	Surface
功率/Power (W)	20W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

Surface



i.SHA
THE ULTIMATE LIGHTING SOLUTION

High-Efficiency Downlight Series

KX 3912 高光效筒灯系列



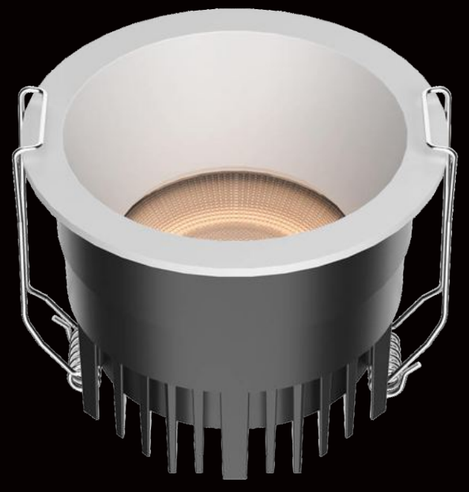

多种面环设计，满足不同场所应用需求

Multiple face ring designs are available to meet the application requirements of different places

i.SHA
THE ULTIMATE LIGHTING SOLUTION









基本参数/Parameters

产品型号/Model	KX 3912-55-圆/Round
产品尺寸/Size (mm)	Φ 65*56
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	8W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 54
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ55





基本参数/Parameters

产品型号/Model	KX 3912-75-圆/Round
产品尺寸/Size (mm)	Φ 85*58
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 54
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ75





基本参数/Parameters

产品型号/Model	KX 3912-95-圆/Round
产品尺寸/Size (mm)	Φ 110*62
开孔尺寸/Cutout (mm)	Φ95
功率/Power (W)	20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 54
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ95



i.SHA
THE ULTIMATE LIGHTING SOLUTION

Soft Beam Lamp
Downlight Series

KX 3915 柔光筒灯系列
Match with the Silander brand lenses
搭配西朗德品牌透镜

i.SHA
THE ULTIMATE LIGHTING SOLUTION







基本参数/Parameters

产品型号/Model	KX 3915-55-圆/Round
产品尺寸/Size (mm)	Φ 65*56
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	8W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 54
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ55



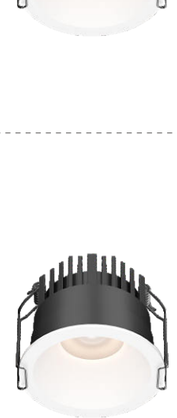

基本参数/Parameters

产品型号/Model	KX 3915-75-圆/Round
产品尺寸/Size (mm)	Φ 85*58
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 54
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ75





基本参数/Parameters

产品型号/Model	KX 3915-95-圆/Round
产品尺寸/Size (mm)	Φ 110*62
开孔尺寸/Cutout (mm)	Φ95
功率/Power (W)	20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 54
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ95



i.SHA
THE ULTIMATE LIGHTING SOLUTION



High-Efficiency Downlight Series

KX 3913 高光效筒灯系列

精准控光，控制光线方向，减少散射
Precise light control,
controlling the direction of light,
and reducing scattering

光斑均匀,过滤自然杂散光,光斑柔和舒适
Uniform light spot
Filter out natural stray light
The light spot is soft and comfortable





基本参数/Parameters

产品型号/Model	KX 3913-55-圆/Round
产品尺寸/Size (mm)	Φ 65*58
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	8W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 54
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ55





基本参数/Parameters

产品型号/Model	KX 3913-75-圆/Round
产品尺寸/Size (mm)	Φ 85*65
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 54
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ75





基本参数/Parameters

产品型号/Model	KX 3913-95-圆/Round
产品尺寸/Size (mm)	Φ 110*76
开孔尺寸/Cutout (mm)	Φ95
功率/Power (W)	20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 54
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ95







High-Efficiency Downlight Series

KX 3911 高光效IP44筒灯系列

i.SHA
THE ULTIMATE LIGHTING SOLUTION





基本参数/Parameters

产品型号/Model	KX 3911-55-圆/Round
产品尺寸/Size (mm)	Φ 65*52
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	7W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ55







基本参数/Parameters

产品型号/Model	KX 3911-75-圆/Round
产品尺寸/Size (mm)	Φ 85*56
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ75







基本参数/Parameters

产品型号/Model	KX 3911-95-圆/Round
产品尺寸/Size (mm)	Φ 105*68
开孔尺寸/Cutout (mm)	Φ95
功率/Power (W)	20W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ95







基本参数/Parameters

产品型号/Model	KX 3911-115-圆/Round
产品尺寸/Size (mm)	Φ 135*80
开孔尺寸/Cutout (mm)	Φ115
功率/Power (W)	28W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ115



i.SHA
THE ULTIMATE LIGHTING SOLUTION

High-Efficiency Downlight Series

AC 9281 高光效筒灯系列



替换防眩罩/Anti-glare reflector cup





基本参数/Parameters

产品型号/Model	AC 9281-55-圆/Round
产品尺寸/Size (mm)	Φ 65*42
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	8W
光学配置/Holder	SMD 2835
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ55





基本参数/Parameters

产品型号/Model	AC9281-75-圆/Round
产品尺寸/Size (mm)	Φ 85*52
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	12W-15W
光学配置/Holder	SMD 2835
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ75



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC9281-95-圆/Round
产品尺寸/Size (mm)	Φ 110*58
开孔尺寸/Cutout (mm)	Φ95
功率/Power (W)	18W-25W
光学配置/Holder	SMD 2835
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ95





基本参数/Parameters

产品型号/Model	AC9281-115-圆/Round
产品尺寸/Size (mm)	Φ 140*65
开孔尺寸/Cutout (mm)	Φ115
功率/Power (W)	25W-30W
光学配置/Holder	SMD 2835
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ115





i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX3418-55-圆/Round
产品尺寸/Size (mm)	Φ65*42
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	8W
光学配置/Holder	SMD 2835
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	90°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ55





基本参数/Parameters

产品型号/Model	KX3418-75-圆/Round
产品尺寸/Size (mm)	Φ85*52
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	12W-15W
光学配置/Holder	SMD 2835
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	90°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ75





基本参数/Parameters

产品型号/Model	KX3418-95-圆/Round
产品尺寸/Size (mm)	Φ110*58
开孔尺寸/Cutout (mm)	Φ95
功率/Power (W)	18W-25W
光学配置/Holder	SMD 2835
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	90°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ95





基本参数/Parameters

产品型号/Model	KX3418-115-圆/Round
产品尺寸/Size (mm)	Φ140*65
开孔尺寸/Cutout (mm)	Φ115
功率/Power (W)	25W-30W
光学配置/Holder	SMD 2835
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	90°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ115









Combined with a highly transparent diffuser plate,
the light source is concealed 30 cm deep.
搭配高透光扩散板，光源深藏30cm

i.SHA
THE ULTIMATE LIGHTING SOLUTION



KX 3050 i.BEI 筒灯系列

KX 3050 **i.BEI** Downlight Series

多种面环设计，满足不同场所应用需求

Multiple face ring designs are available to meet the application requirements of different places

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3050-A 75-圆/Round
产品尺寸/Size (mm)	ϕ88*55H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	KX 3050-B 75-圆/Round
产品尺寸/Size (mm)	ϕ88*55H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	KX 3050-C 75-圆/Round
产品尺寸/Size (mm)	ϕ88*55H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	KX 3050-D 75-圆/Round
产品尺寸/Size (mm)	ϕ88*55H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75



i.SHA
THE ULTIMATE LIGHTING SOLUTION



KX 3062 High-Efficiency Downlight Series
KX 3062 高光效筒灯系列

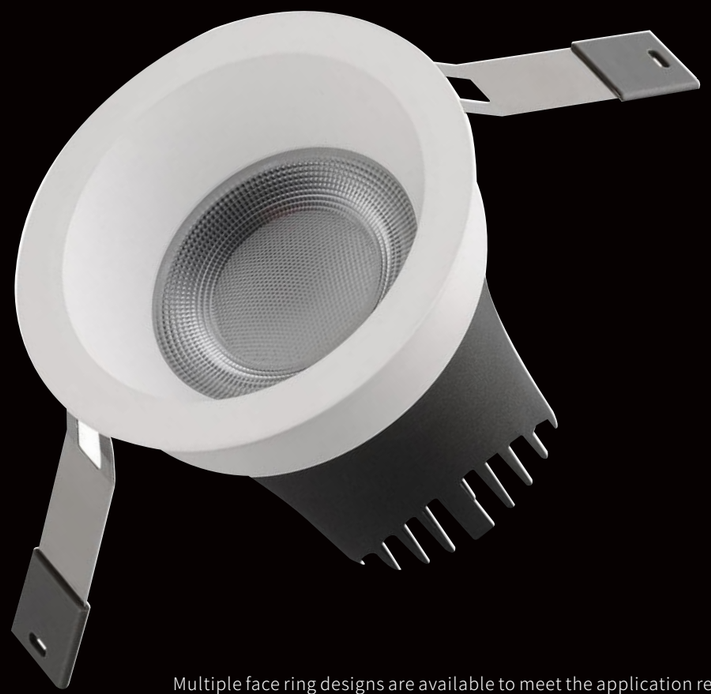

Multiple face ring designs are available to meet the application requirements of different places
多种面环设计，满足不同场所应用需求



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3062 75-圆/Round
产品尺寸/Size (mm)	Φ82*72H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ75





基本参数/Parameters

产品型号/Model	KX 3062 55-圆/Round
产品尺寸/Size (mm)	Φ61*50H
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ55





基本参数/Parameters

产品型号/Model	KX 3062 75-圆/Round
产品尺寸/Size (mm)	Φ81*70H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ75



i.SHA
THE ULTIMATE LIGHTING SOLUTION







基本参数/Parameters

产品型号/Model	KX 3062 55-圆/Round
产品尺寸/Size (mm)	ϕ61*50H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD: ϕ55





基本参数/Parameters

产品型号/Model	KX 3062 75-圆/Round
产品尺寸/Size (mm)	ϕ81*71H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD: ϕ75





KX 3062 High-Efficiency Downlight Series
KX 3062 高光效筒灯系列





基本参数/Parameters

产品型号/Model	KX 3062 55-圆/Round
产品尺寸/Size (mm)	ϕ61*50H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD: ϕ55





基本参数/Parameters

产品型号/Model	KX 3062 75-圆/Round
产品尺寸/Size (mm)	ϕ81*71H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD: ϕ75



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3062 55-圆/Round
产品尺寸/Size (mm)	ϕ61*50H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	KX 3062 75-圆/Round
产品尺寸/Size (mm)	ϕ81*71H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55



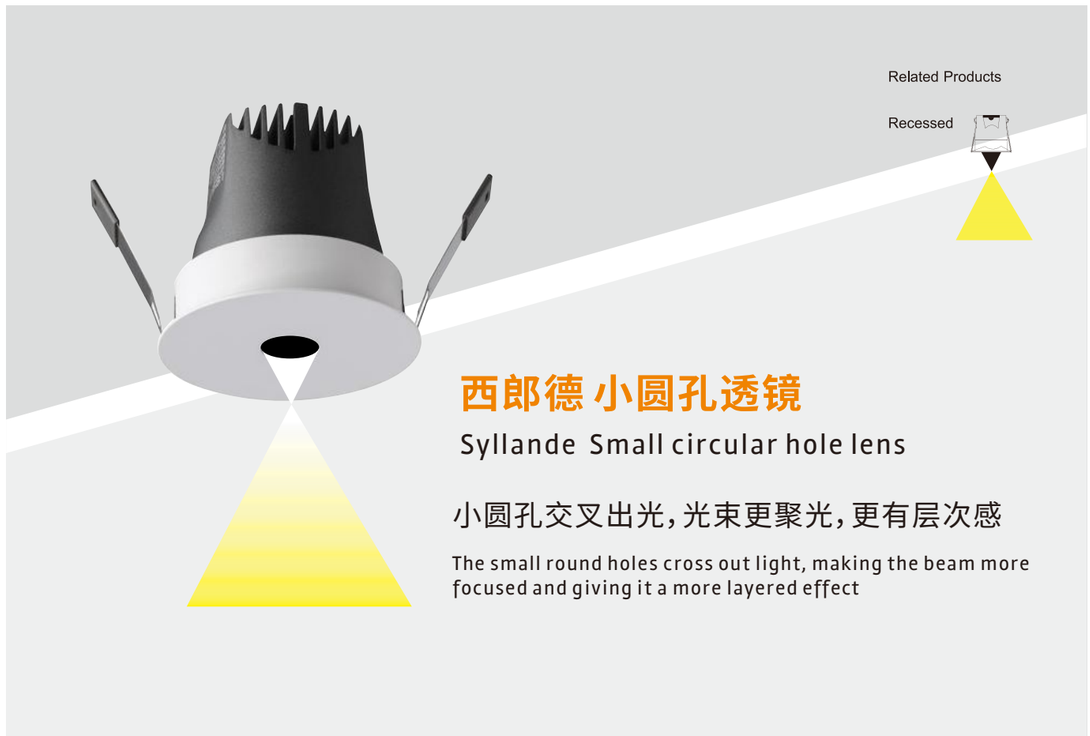

i.SHA
THE ULTIMATE LIGHTING SOLUTION





KX 3036-C series



KX 3036-A series

Related Products

Recessed



Syllande Small circular hole lens
西郎德 小圆孔透镜

The small round holes cross out light, making the beam more focused and giving it a more layered effect

小圆孔交叉出光，光束更聚光，更有层次感

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3036 45-圆/Round
产品尺寸/Size (mm)	ϕ52*40H ϕ52*52H
开孔尺寸/Cutout (mm)	ϕ45
功率/Power (W)	5W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ45





基本参数/Parameters

产品型号/Model	KX 3036 55-圆/Round
产品尺寸/Size (mm)	ϕ62*54H ϕ62*62H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	9W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	KX 3036 65-圆/Round
产品尺寸/Size (mm)	ϕ73*60H ϕ73*80H
开孔尺寸/Cutout (mm)	ϕ65
功率/Power (W)	12W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ65





基本参数/Parameters

产品型号/Model	KX 3036 75-圆/Round
产品尺寸/Size (mm)	ϕ83*65H ϕ83*90H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	18W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3036-D 45-圆/Round
产品尺寸/Size (mm)	Φ52*40H
开孔尺寸/Cutout (mm)	Φ45
功率/Power (W)	5W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ45





基本参数/Parameters

产品型号/Model	KX 3036-D 55-圆/Round
产品尺寸/Size (mm)	Φ62*54H
开孔尺寸/Cutout (mm)	Φ55
功率/Power (W)	9W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ55





基本参数/Parameters

产品型号/Model	KX 3036-D 65-圆/Round
产品尺寸/Size (mm)	Φ73*60H
开孔尺寸/Cutout (mm)	Φ65
功率/Power (W)	12W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ65





基本参数/Parameters

产品型号/Model	KX 3036-D 75-圆/Round
产品尺寸/Size (mm)	Φ83*65H
开孔尺寸/Cutout (mm)	Φ75
功率/Power (W)	18W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
Φ75



i.SHA
THE ULTIMATE LIGHTING SOLUTION



KX 3036 D Series



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3036-B 45-圆/Round
产品尺寸/Size (mm)	ϕ52*52H
开孔尺寸/Cutout (mm)	ϕ45
功率/Power (W)	5W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ45





基本参数/Parameters

产品型号/Model	KX 3036-B 55-圆/Round
产品尺寸/Size (mm)	ϕ62*62H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	9W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	KX 3036-B 65-圆/Round
产品尺寸/Size (mm)	ϕ73*80H
开孔尺寸/Cutout (mm)	ϕ65
功率/Power (W)	12W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ65





基本参数/Parameters

产品型号/Model	KX 3036-B 75-圆/Round
产品尺寸/Size (mm)	ϕ83*90H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	18W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75







AC 9345-A 系列

AC 9345 Downlight Series

I.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9345-A 35-圆/Round
产品尺寸/Size (mm)	ϕ40*47H
开孔尺寸/Cutout (mm)	ϕ35
功率/Power (W)	3W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9345-A 45-圆/Round
产品尺寸/Size (mm)	ϕ50*55H
开孔尺寸/Cutout (mm)	ϕ45
功率/Power (W)	6W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9345-A 55-圆/Round
产品尺寸/Size (mm)	ϕ60*60H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)







ϕ35



ϕ45



ϕ55

I.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9345-B 35-圆/Round
产品尺寸/Size (mm)	ϕ40*47H
开孔尺寸/Cutout (mm)	ϕ35
功率/Power (W)	3W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ35





基本参数/Parameters

产品型号/Model	AC 9345-B 45-圆/Round
产品尺寸/Size (mm)	ϕ50*55H
开孔尺寸/Cutout (mm)	ϕ45
功率/Power (W)	6W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ45





基本参数/Parameters

产品型号/Model	AC 9345-B 55-圆/Round
产品尺寸/Size (mm)	ϕ60*57H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55



i.SHA
THE ULTIMATE LIGHTING SOLUTION

AC 9345-C 系列

AC 9345-C Downlight Series



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9345-C 35-圆/Round
产品尺寸/Size (mm)	ϕ40*47H
开孔尺寸/Cutout (mm)	ϕ35
功率/Power (W)	3W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ35





基本参数/Parameters

产品型号/Model	AC 9345-C 45-圆/Round
产品尺寸/Size (mm)	ϕ50*55H
开孔尺寸/Cutout (mm)	ϕ35
功率/Power (W)	6W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ45





基本参数/Parameters

产品型号/Model	AC 9345-C 55-圆/Round
产品尺寸/Size (mm)	ϕ60*57H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55



i.SHA
THE ULTIMATE LIGHTING SOLUTION



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9345-D 方/Square
产品尺寸/Size (mm)	54*49*52H
开孔尺寸/Cutout (mm)	45*45
功率/Power (W)	3W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
45*45





基本参数/Parameters

产品型号/Model	AC 9345-D 方/Square
产品尺寸/Size (mm)	94*49*52H
开孔尺寸/Cutout (mm)	45*90
功率/Power (W)	6W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
45*90





基本参数/Parameters

产品型号/Model	AC 9345-D 方/Square
产品尺寸/Size (mm)	134*49*52H
开孔尺寸/Cutout (mm)	45*125
功率/Power (W)	9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
45*125



i.SHA
THE ULTIMATE LIGHTING SOLUTION

AC 9346 系列

AC 9346 Downlight Series

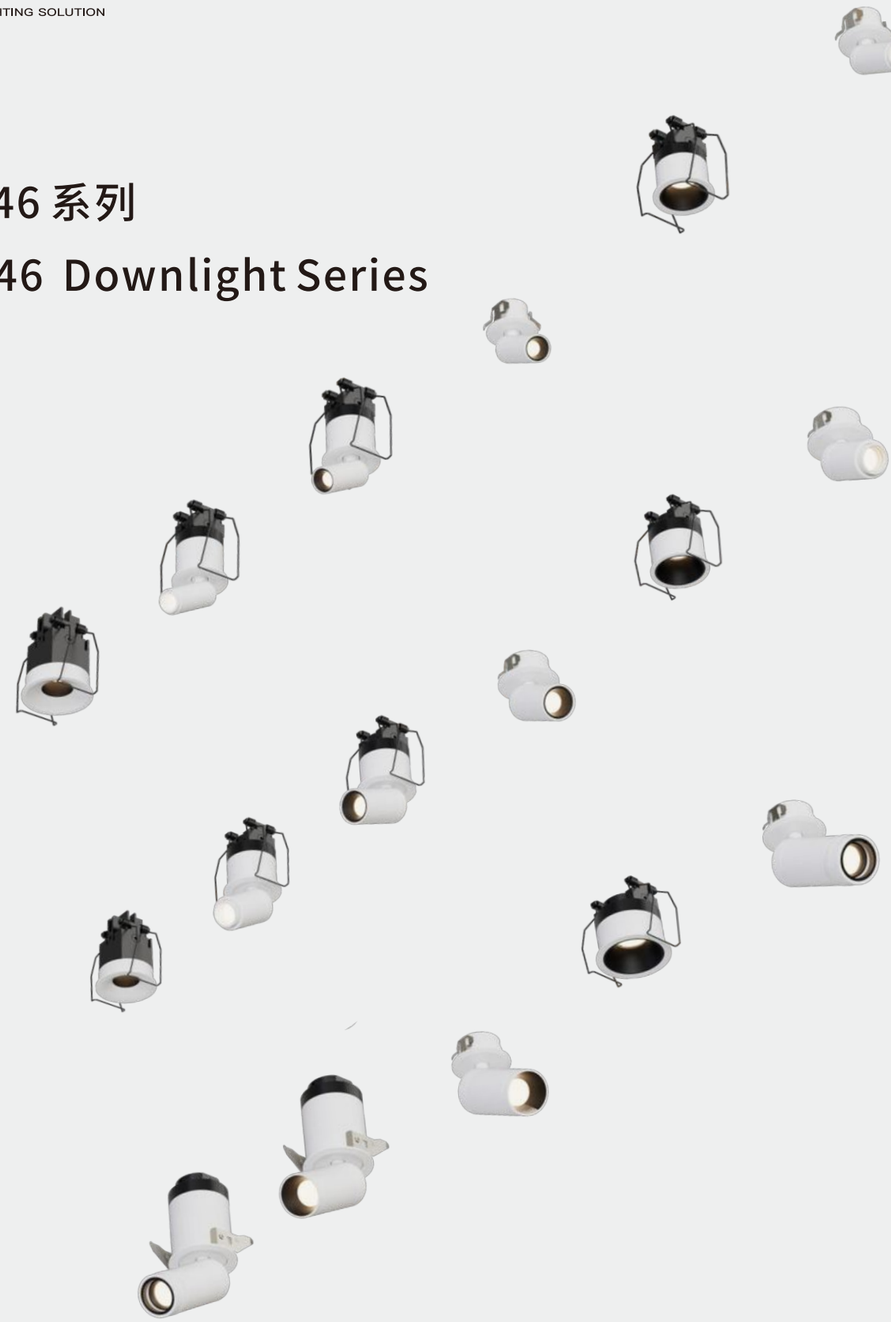

Mini spotlight design, with fixed direct lighting, embedded,
semi-embedded, and adjustable focus options,
to meet the needs of various scenarios.

迷你小射灯设计，固定直照/嵌入式/半嵌入/调焦等，满足不同场景需求

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9346 35-圆/Round
产品尺寸/Size (mm)	ϕ38*61H
开孔尺寸/Cutout (mm)	ϕ35
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ35





基本参数/Parameters

产品型号/Model	AC 9346 25-圆/Round
产品尺寸/Size (mm)	ϕ29*48H
开孔尺寸/Cutout (mm)	ϕ25
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ25





基本参数/Parameters

产品型号/Model	AC 9346 30-圆/Round
产品尺寸/Size (mm)	ϕ33*51H
开孔尺寸/Cutout (mm)	ϕ30
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ30





基本参数/Parameters

产品型号/Model	AC 9346 40-圆/Round
产品尺寸/Size (mm)	ϕ43*53H
开孔尺寸/Cutout (mm)	ϕ40
功率/Power (W)	5W
光学配置/Holder	SMD 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ40



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9346 25-圆/Round
产品尺寸/Size (mm)	ϕ29*60H ϕ25*H48
开孔尺寸/Cutout (mm)	ϕ25 ϕ20
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ25 & ϕ20





基本参数/Parameters

产品型号/Model	AC 9346 30-圆/Round
产品尺寸/Size (mm)	ϕ35*70H ϕ35*56
开孔尺寸/Cutout (mm)	ϕ30 ϕ30
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ30





基本参数/Parameters

产品型号/Model	AC 9346 40-圆/Round
产品尺寸/Size (mm)	ϕ43*78H ϕ35*H74
开孔尺寸/Cutout (mm)	ϕ40 ϕ30
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ40 & ϕ30





基本参数/Parameters

产品型号/Model	AC 9346 25-圆/Round
产品尺寸/Size (mm)	ϕ29*60H ϕ25*H48
开孔尺寸/Cutout (mm)	ϕ25 ϕ20
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	Focus:15°-40° 15° 40°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ25 & ϕ20





基本参数/Parameters

产品型号/Model	AC 9346 30-圆/Round
产品尺寸/Size (mm)	ϕ35*70H ϕ35*56
开孔尺寸/Cutout (mm)	ϕ30 ϕ30
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	Focus:15°-40° 15° 40°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ30





基本参数/Parameters

产品型号/Model	AC 9346 40-圆/Round
产品尺寸/Size (mm)	ϕ43*78H ϕ35*H74
开孔尺寸/Cutout (mm)	ϕ40 ϕ30
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	Focus:15°-40° 15° 40°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ40 & ϕ30



光束角变化15°-40°
The beam angle changes by 15°-40° degrees.
自由变焦，既可聚光也可散光,拉长,光斑变小,缩短光斑变大
Free zooming, it can both focus and defocus. When zooming in, the light spot becomes smaller; when zooming out, the light spot becomes larger





基本参数/Parameters

产品型号/Model	AC 9346 35-圆/Round
产品尺寸/Size (mm)	ϕ38*40H
开孔尺寸/Cutout (mm)	ϕ35
功率/Power (W)	3W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD: ϕ35





基本参数/Parameters

产品型号/Model	AC 9346 45-圆/Round
产品尺寸/Size (mm)	ϕ48*47H
开孔尺寸/Cutout (mm)	ϕ45
功率/Power (W)	3W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD: ϕ45



Multiple anti-glare

Professional optical design makes the light environment more comfortable

多重防眩-专业级光学设计,让光环境更舒适



i.SHA
THE ULTIMATE LIGHTING SOLUTION

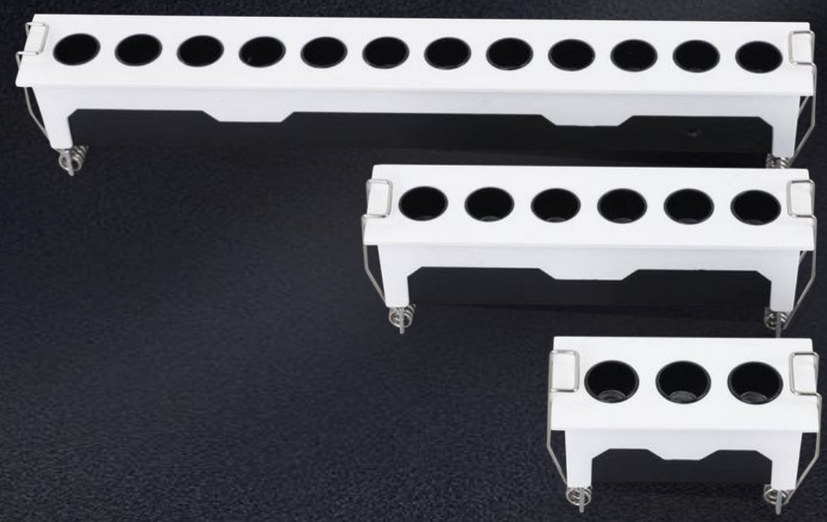





Embedded grid spotlights (linear spotlights)

Die-cast aluminum radiator 2-hole, 6-hole, 12-hole

The lamp cup is usually paired with a deep anti-glare optical structure,
providing soft and non-dazzling light to enhance the comfort of the space.
It can be flexibly selected according to the size of the
space and the lighting requirements

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	IS 3302 方/square
产品尺寸/Size (mm)	L73*32*50H
开孔尺寸/Cutout (mm)	L68*25
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 45°

产品尺寸图/Dimension (mm)

开孔/Cutout
L68*25





基本参数/Parameters

产品型号/Model	IS 3302 方/square
产品尺寸/Size (mm)	L133*32*50H
开孔尺寸/Cutout (mm)	L128*25
功率/Power (W)	2W*6
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 45°

产品尺寸图/Dimension (mm)

开孔/Cutout
L128*25





基本参数/Parameters

产品型号/Model	IS 3302 方/square
产品尺寸/Size (mm)	L253*32*50H
开孔尺寸/Cutout (mm)	L248*25
功率/Power (W)	2W*12
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L248*25



i.SHA
THE ULTIMATE LIGHTING SOLUTION



Optical lens - Uniform light transmission, no light spots
光学透镜-透光均匀，无光斑

The design of the light source is concealed to prevent it from being too bright and causing discomfort
光源深藏设计避免光源刺眼

Black light anti-glare hood - Effectively absorbs stray light and deeply conceals the anti-glare feature
黑光防眩罩-有效的吸收杂光深藏防眩

Use the GRreflective cup - the light is evenly distributed and the illumination is soft
采用格锐反光杯-出光均匀，光线柔和

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L45*45*50H
开孔尺寸/Cutout (mm)	L38*38
功率/Power (W)	2W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 45°

产品尺寸图/Dimension (mm)

开孔/Cutout
L38*38





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L75*45*50H
开孔尺寸/Cutout (mm)	L68*38
功率/Power (W)	2W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 45°

产品尺寸图/Dimension (mm)

开孔/Cutout
L68*38





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L94*45*40H
开孔尺寸/Cutout (mm)	L86*38
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L86*38





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L148*45*50H
开孔尺寸/Cutout (mm)	L138*38
功率/Power (W)	2W*5
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L138*38



i.SHA
THE ULTIMATE LIGHTING SOLUTION



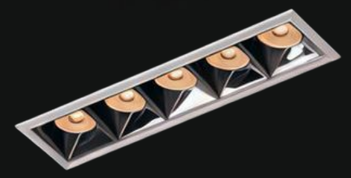



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L173*45*40H
开孔尺寸/Cutout (mm)	L162*38
功率/Power (W)	2W*6
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 45°

产品尺寸图/Dimension (mm)

开孔/Cutout
L162*38





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L279*45*50H
开孔尺寸/Cutout (mm)	L128*25
功率/Power (W)	2W*10
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 45°

产品尺寸图/Dimension (mm)

开孔/Cutout
L272*38





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L332*45*40H
开孔尺寸/Cutout (mm)	L325*38
功率/Power (W)	2W*12
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L325*38





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L411*45*50H
开孔尺寸/Cutout (mm)	L403*38
功率/Power (W)	2W*15
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L403*38



i.SHA
THE ULTIMATE LIGHTING SOLUTION

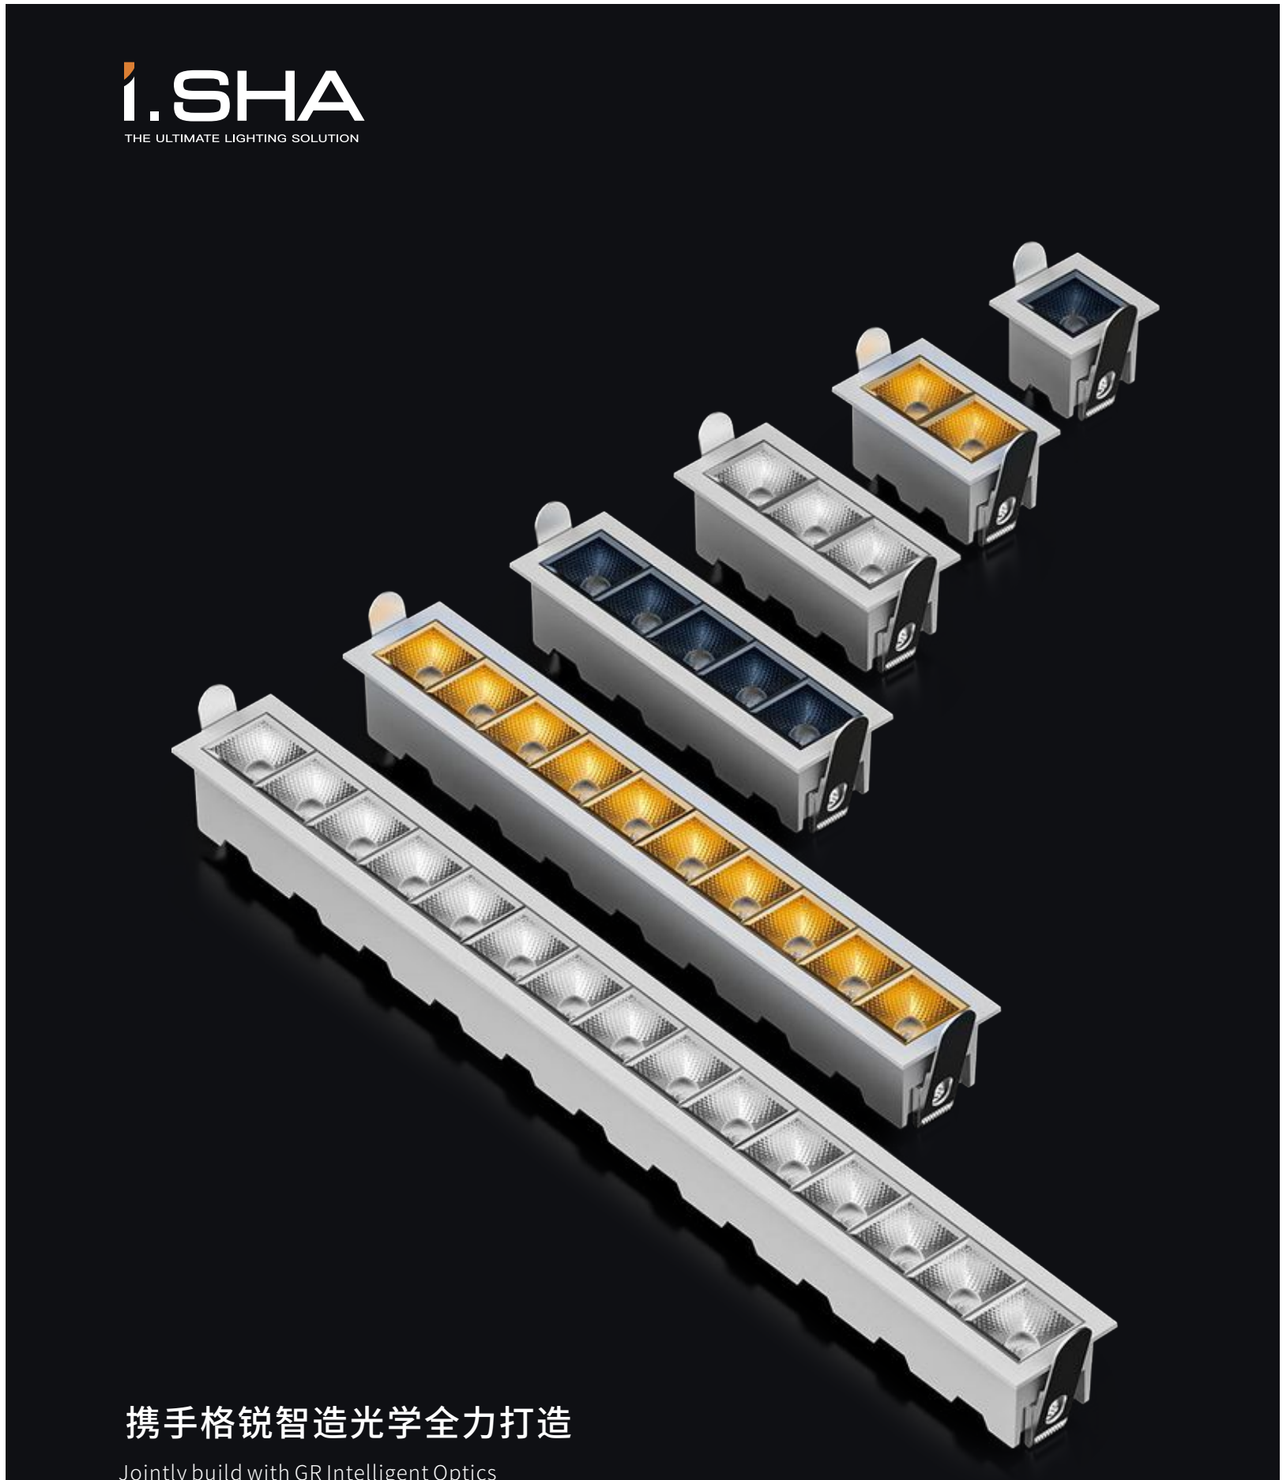

携手格锐智造光学全力打造

Jointly build with GR Intelligent Optics

50°80°大发光角度-发光效率高，每瓦可达160流明

50°, 80° - Wide viewing angle, High luminous efficiency,
with up to 160 lumens per watt

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L45*46*53H
开孔尺寸/Cutout (mm)	L35*36
功率/Power (W)	2W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	50° 80°

产品尺寸图/Dimension (mm)

开孔/Cutout
L35*36





基本参数/Parameters

产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L75*46*53H
开孔尺寸/Cutout (mm)	L65*36
功率/Power (W)	2W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	50° 80°

产品尺寸图/Dimension (mm)

开孔/Cutout
L65*36





基本参数/Parameters

产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L105*46*53H
开孔尺寸/Cutout (mm)	L95*36
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	50° 80°

产品尺寸图/Dimension (mm)

开孔/Cutout
L96*36





基本参数/Parameters

产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L155*46*53H
开孔尺寸/Cutout (mm)	L145*36
功率/Power (W)	2W*5
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	50° 80°

产品尺寸图/Dimension (mm)

开孔/Cutout
L145*36





Jointly build with GR Intelligent Optics
携手格锐智造光学全力打造

50°, 80° - Wide viewing angle
50°80°大发光角度

High luminous efficiency,
with up to 160 lumens per watt
发光效率高，每瓦可达160流明



基本参数/Parameters

产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L295*46*53H
开孔尺寸/Cutout (mm)	L285*25
功率/Power (W)	2W*10
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	50° 80°

产品尺寸图/Dimension (mm)

开孔/Cutout
L285*36



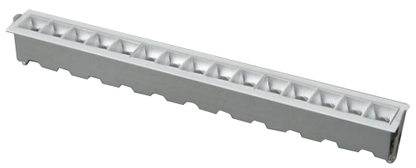

基本参数/Parameters

产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L435*46*53H
开孔尺寸/Cutout (mm)	L425*36
功率/Power (W)	2W*15
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	50° 80°

产品尺寸图/Dimension (mm)

开孔/Cutout
L425*36







基本参数/Parameters

产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L147*45*50H
开孔尺寸/Cutout (mm)	L138*38
功率/Power (W)	2W*5
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 54
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	38°

产品尺寸图/Dimension (mm)

开孔/Cutout
L138*38



i.SHA
THE ULTIMATE LIGHTING SOLUTION

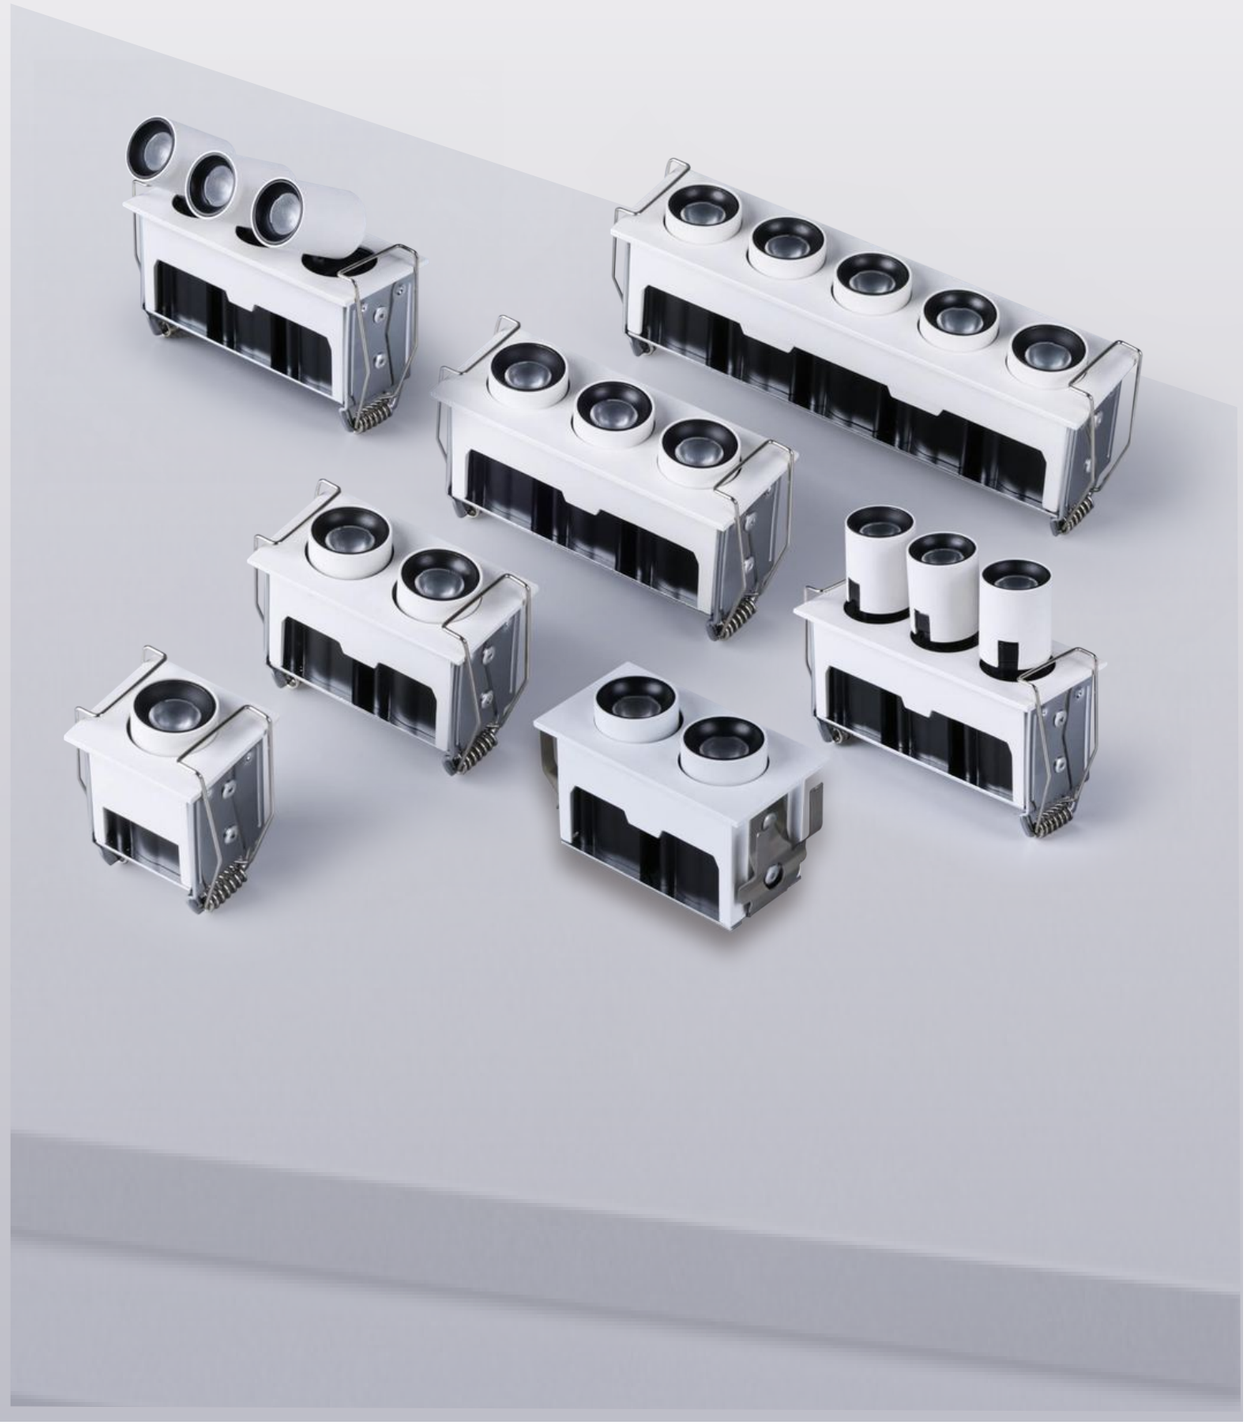

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	IS 3306 方/square
产品尺寸/Size (mm)	L43*40*43H
开孔尺寸/Cutout (mm)	L40*35
功率/Power (W)	2W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L40*35





基本参数/Parameters

产品型号/Model	IS 3306 方/square
产品尺寸/Size (mm)	L72*40*43H
开孔尺寸/Cutout (mm)	L68*35
功率/Power (W)	2W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L68*35





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L100*40*43H
开孔尺寸/Cutout (mm)	L96*35
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L96*35





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L162*40*43H
开孔尺寸/Cutout (mm)	L156*35
功率/Power (W)	2W*5
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L156*35



i.SHA
THE ULTIMATE LIGHTING SOLUTION

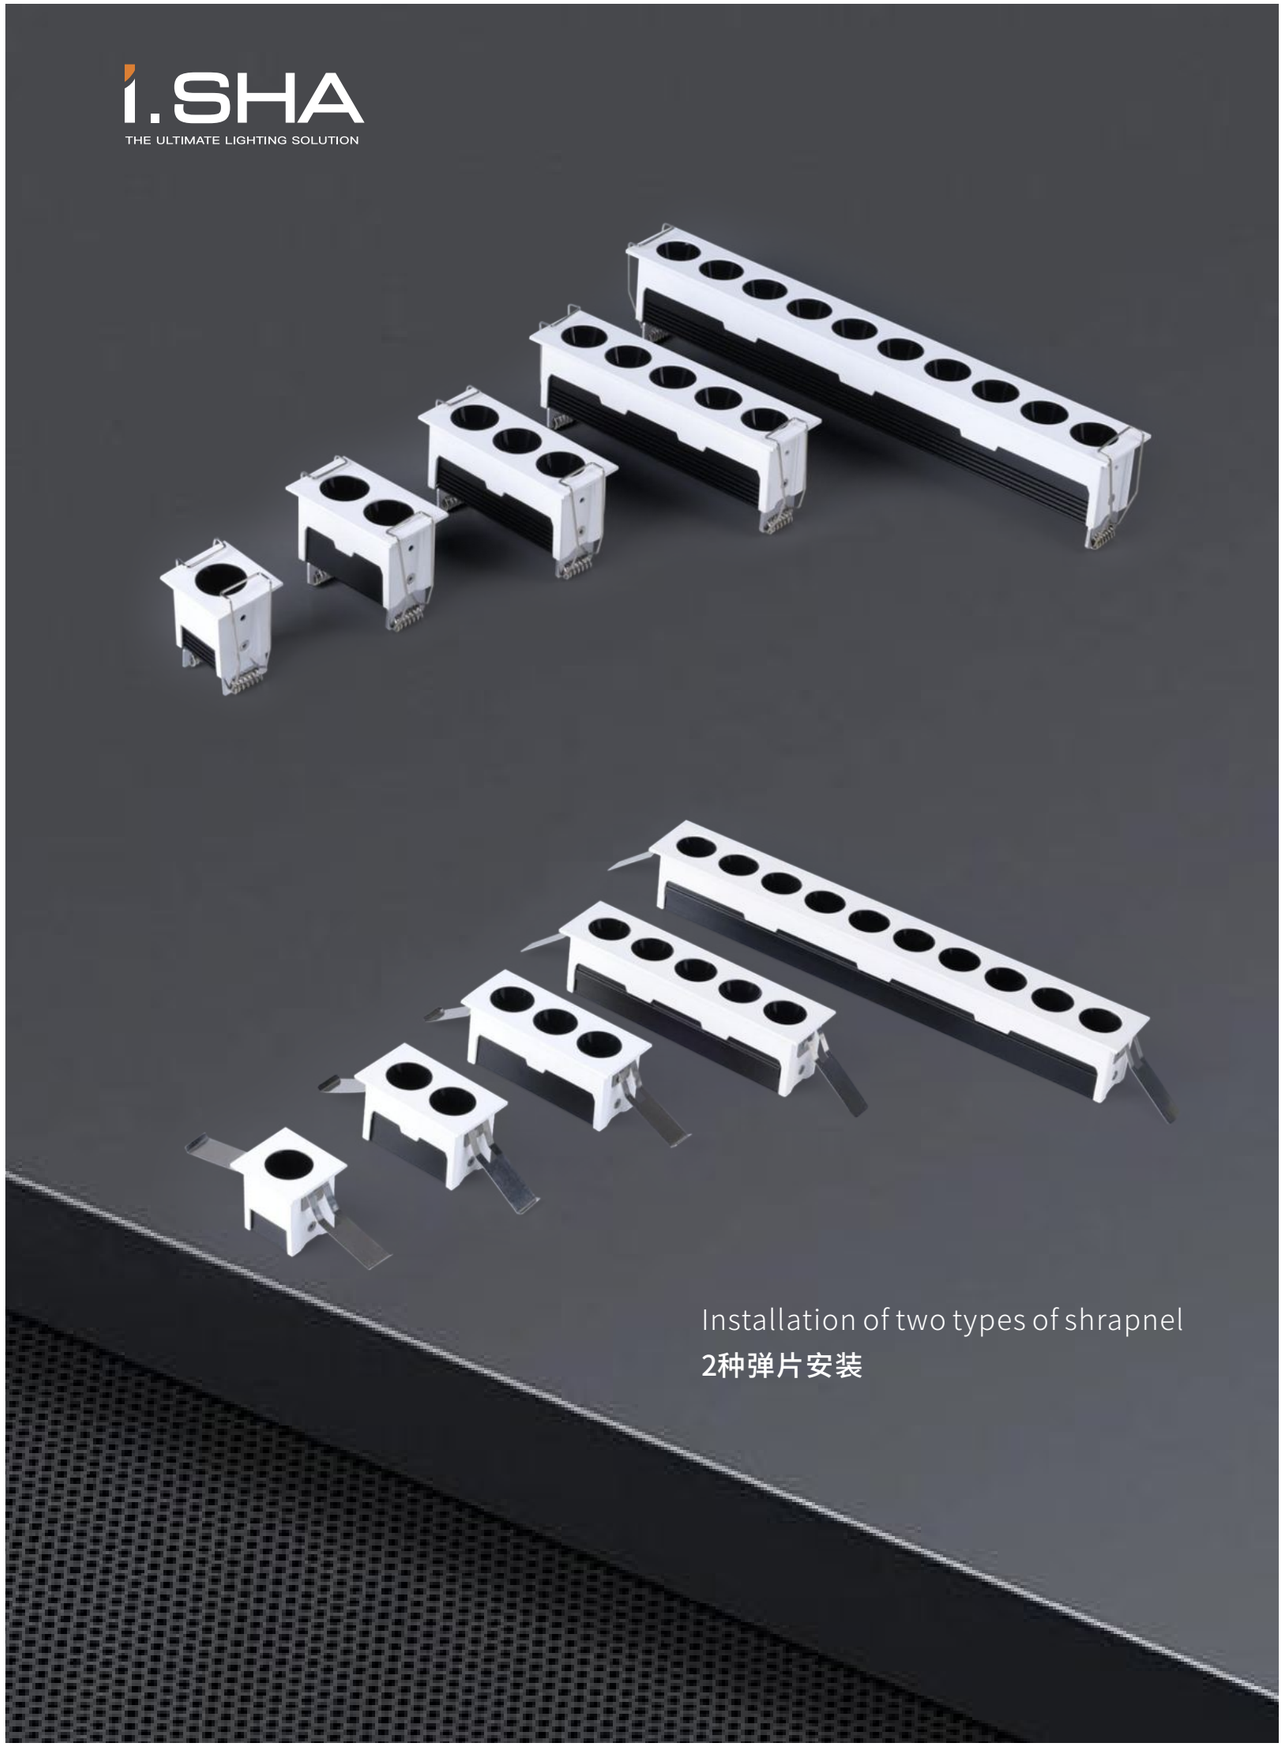

Installation of two types of shrapnel
2种弹片安装

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9178 方/square
产品尺寸/Size (mm)	L40*43*42H
开孔尺寸/Cutout (mm)	L40*35
功率/Power (W)	2W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L40*35





基本参数/Parameters

产品型号/Model	AC 9178 方/square
产品尺寸/Size (mm)	L72*40*42H
开孔尺寸/Cutout (mm)	L70*35
功率/Power (W)	2W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L72*35





基本参数/Parameters

产品型号/Model	AC 9178 方/square
产品尺寸/Size (mm)	L100*40*42H
开孔尺寸/Cutout (mm)	L98*35
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L98*35





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L162*40*42H
开孔尺寸/Cutout (mm)	L158*35
功率/Power (W)	2W*5
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L158*35





基本参数/Parameters

产品型号/Model	AC 9178 方/square
产品尺寸/Size (mm)	L312*40*42H
开孔尺寸/Cutout (mm)	L308*35
功率/Power (W)	2W*10
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L308*35



i.SHA
THE ULTIMATE LIGHTING SOLUTION



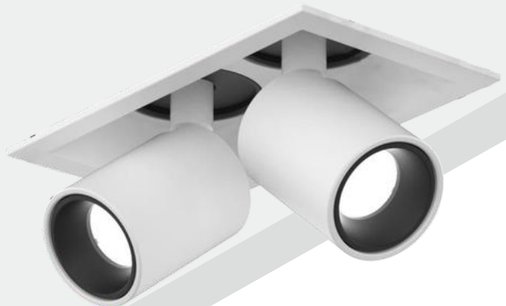

AC 9348 Grille series

Multiple combination designs, adjustable to 350° rotation and 90° irradiation



i.SHA
THE ULTIMATE LIGHTING SOLUTION





基本参数/Parameters

产品型号/Model	AC 9348 Line light 方/square
产品尺寸/Size (mm)	L70.5*32*48H
开孔尺寸/Cutout (mm)	L63*25
功率/Power (W)	2W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L63*25





基本参数/Parameters

产品型号/Model	AC 9348 Line light 方/square
产品尺寸/Size (mm)	L127.5*32*48H
开孔尺寸/Cutout (mm)	L120*25
功率/Power (W)	2W*4
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L120*25





基本参数/Parameters

产品型号/Model	AC 9348 Line light 方/square
产品尺寸/Size (mm)	L245*32*48H
开孔尺寸/Cutout (mm)	L240*25
功率/Power (W)	2W*8
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L240*25



i.SHA
THE ULTIMATE LIGHTING SOLUTION

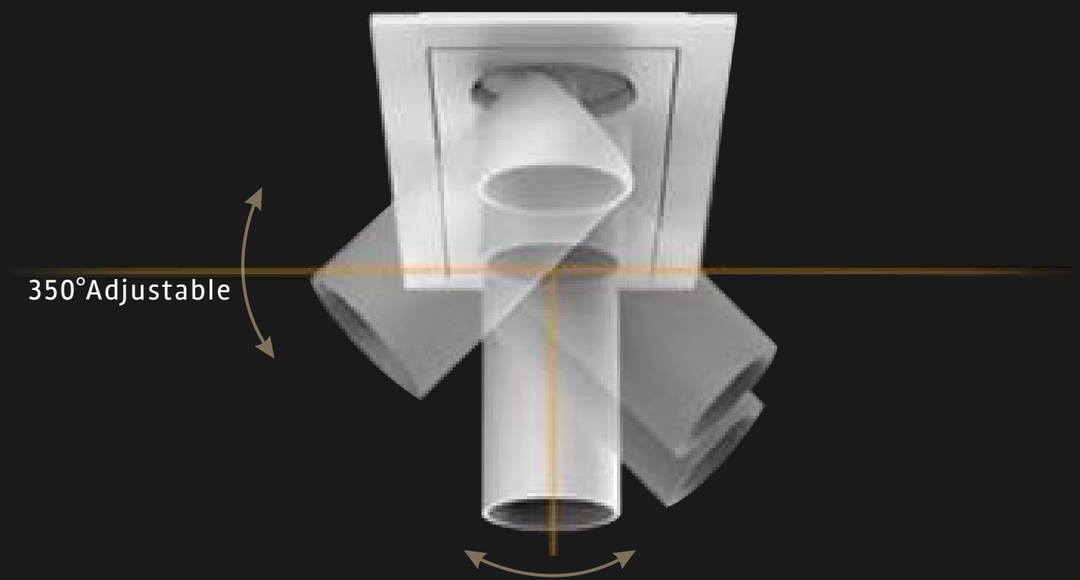









基本参数/Parameters

产品型号/Model	AC 9348 Line light 方/square
产品尺寸/Size (mm)	L85*46*63H
开孔尺寸/Cutout (mm)	L78*35
功率/Power (W)	3W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L78*38







基本参数/Parameters

产品型号/Model	AC 9348 Line light 方/square
产品尺寸/Size (mm)	L141.5*46*63H
开孔尺寸/Cutout (mm)	L135*38
功率/Power (W)	3W*4
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L135*38







基本参数/Parameters

产品型号/Model	AC 9348 Line light 方/square
产品尺寸/Size (mm)	L259*46*63H
开孔尺寸/Cutout (mm)	L252*38
功率/Power (W)	3W*8
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L252*38



i.SHA
THE ULTIMATE LIGHTING SOLUTION

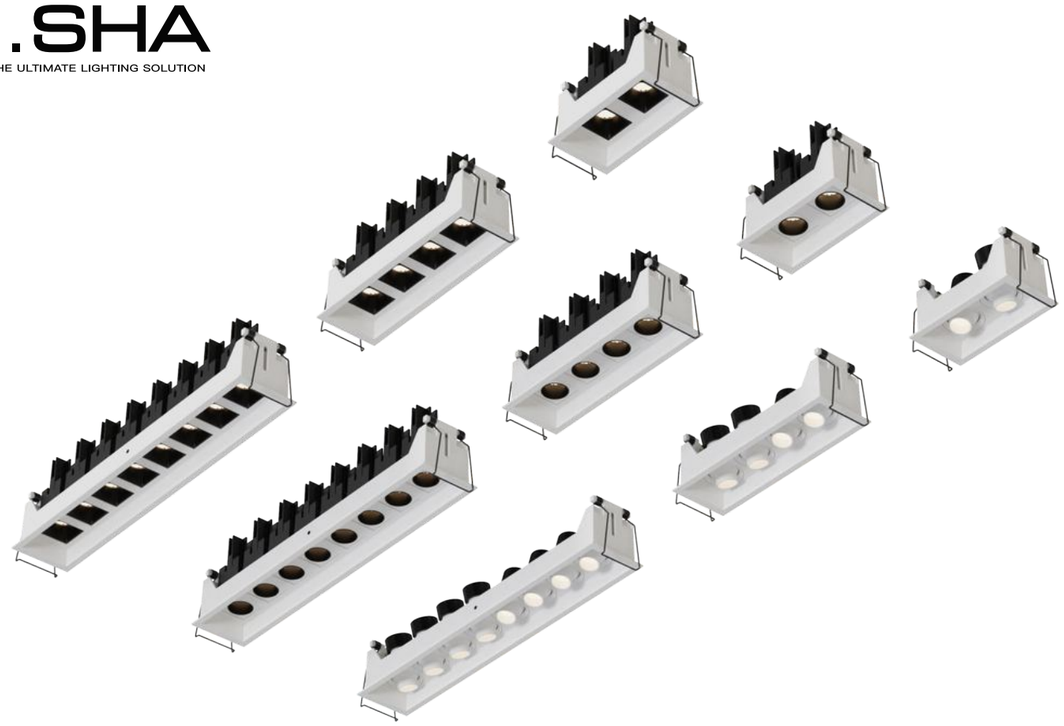

AC 9352 Grille series



square-Anti-glare cup

Square anti-glare design: A combination of black grille and optical lens can significantly reduce the problem of direct light being too bright, thereby enhancing visual comfort.
方形防眩光设计：黑色格栅与光学透镜组合，可大幅减少光线直射刺眼问题，提升视觉舒适度



Round-Anti-glare cup

Circular anti-glare cup design: The black anti-glare cup is combined with a deep cup structure. Through physical shading and optical processing, it can effectively block stray light, and the anti-glare effect (UGR value) is usually below 16, suitable for spaces with high requirements for visual comfort
圆形防眩杯设计：黑色防眩杯配合深杯结构，通过物理遮光和光学处理，能有效切断杂散光，防眩效果（UGR 值）通常可低于 16，适合对视觉舒适度要求高的空间



Round-Anti-glare bucket

360° Rotating Lamp Cap: With a deep bucket-shaped light-shielding design, the lamp cap can achieve 360° horizontal rotation + vertical angle adjustment. It can precisely target any area requiring lighting and meets the lighting needs of complex spaces.
360° 旋转灯头：采用深桶式遮光设计，灯头可实现水平 360° 旋转 + 垂直角度调节，能精准对准任意需要照明的区域，适配复杂空间的照明需求

i.SHA
THE ULTIMATE LIGHTING SOLUTION

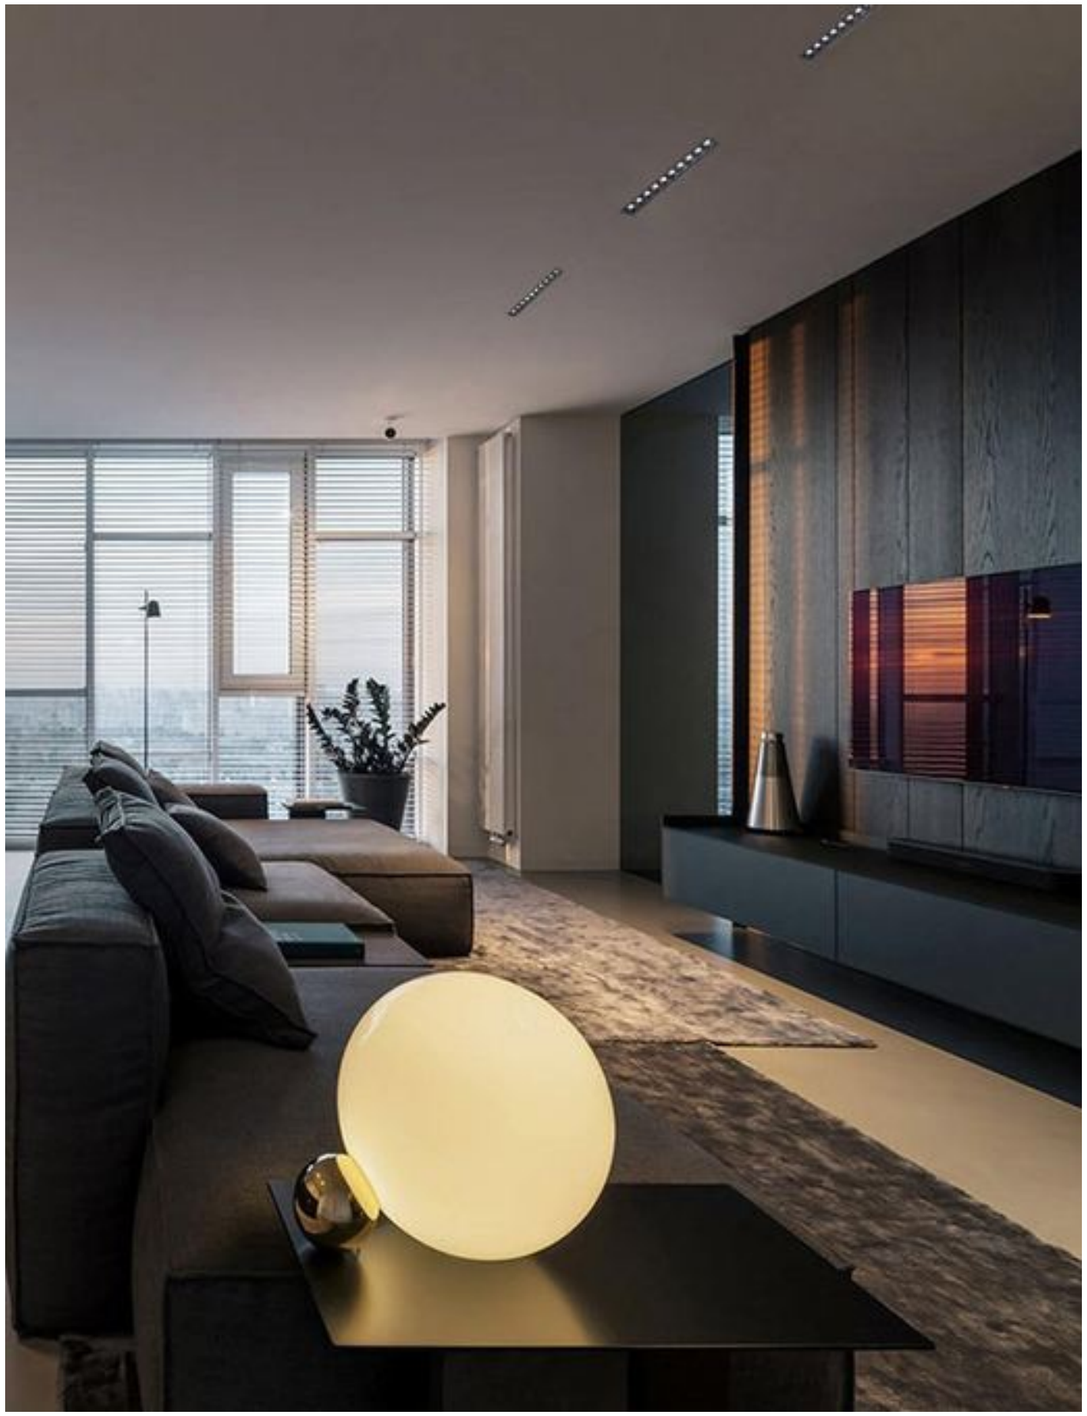

AC 9349 Grille series

i.SHA
THE ULTIMATE LIGHTING SOLUTION

AC 9352 Series

Round-Anti-glare cup

&

square-Anti-glare cup













i.SHA
THE ULTIMATE LIGHTING SOLUTION





基本参数/Parameters

产品型号/Model	AC 9352 Line light 方/square
产品尺寸/Size (mm)	L85*46*65H
开孔尺寸/Cutout (mm)	L78*38
功率/Power (W)	3W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L78*38







基本参数/Parameters

产品型号/Model	AC 9352 Line light 方/square
产品尺寸/Size (mm)	L142*46*65H
开孔尺寸/Cutout (mm)	L135*38
功率/Power (W)	3W*4
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L135*38







基本参数/Parameters

产品型号/Model	AC 9352 Line light 方/square
产品尺寸/Size (mm)	L259*46*66H
开孔尺寸/Cutout (mm)	L252*38
功率/Power (W)	3W*8
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L252*38



i.SHA
THE ULTIMATE LIGHTING SOLUTION





360° rotatable lamp head, flexible lighting for local key areas
360°旋转灯头，灵活照明局部重点区域

The lamp head can rotate horizontally 360° and adjust up and down by 0-20°, precisely targeting any area that requires illumination and meeting the lighting needs of complex spaces.

灯头可实现水平 360° 旋转 + 0-20°左右调节，
能精准对准任意需要照明的区域，
适配复杂空间的照明需求



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9352 Line light 方/square
产品尺寸/Size (mm)	L85*46*46H
开孔尺寸/Cutout (mm)	L78*38
功率/Power (W)	3W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	砂白/Matte White 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L78*38





基本参数/Parameters

产品型号/Model	AC 9352 Line light 方/square
产品尺寸/Size (mm)	L142*46*46H
开孔尺寸/Cutout (mm)	L135*38
功率/Power (W)	3W*4
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	砂白/Matte White 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L135*38





基本参数/Parameters

产品型号/Model	AC 9352 Line light 方/square
产品尺寸/Size (mm)	L259*46*46H
开孔尺寸/Cutout (mm)	L252*38
功率/Power (W)	3W*8
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	砂白/Matte White 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L252*38



i.SHA
THE ULTIMATE LIGHTING SOLUTION





A-圆孔光学款

A - Circular Hole Optical Style



B-方孔光学款

B - Square Hole Optical Model



C-高光效光学款

C - High-efficiency Optical Model

i.SHA
THE ULTIMATE LIGHTING SOLUTION





基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L31.5*31.5*H55
开孔尺寸/Cutout (mm)	L25*25
功率/Power (W)	2W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L25*25







基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L53.5*31.5*H55
开孔尺寸/Cutout (mm)	L47*25
功率/Power (W)	2W*2
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L47*25







基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L75*31.5*H55
开孔尺寸/Cutout (mm)	L69*25
功率/Power (W)	2W*3
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L69*25







基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L96.5*31.5*H55
开孔尺寸/Cutout (mm)	L90*25
功率/Power (W)	2W*4
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L90*25



i.SHA
THE ULTIMATE LIGHTING SOLUTION

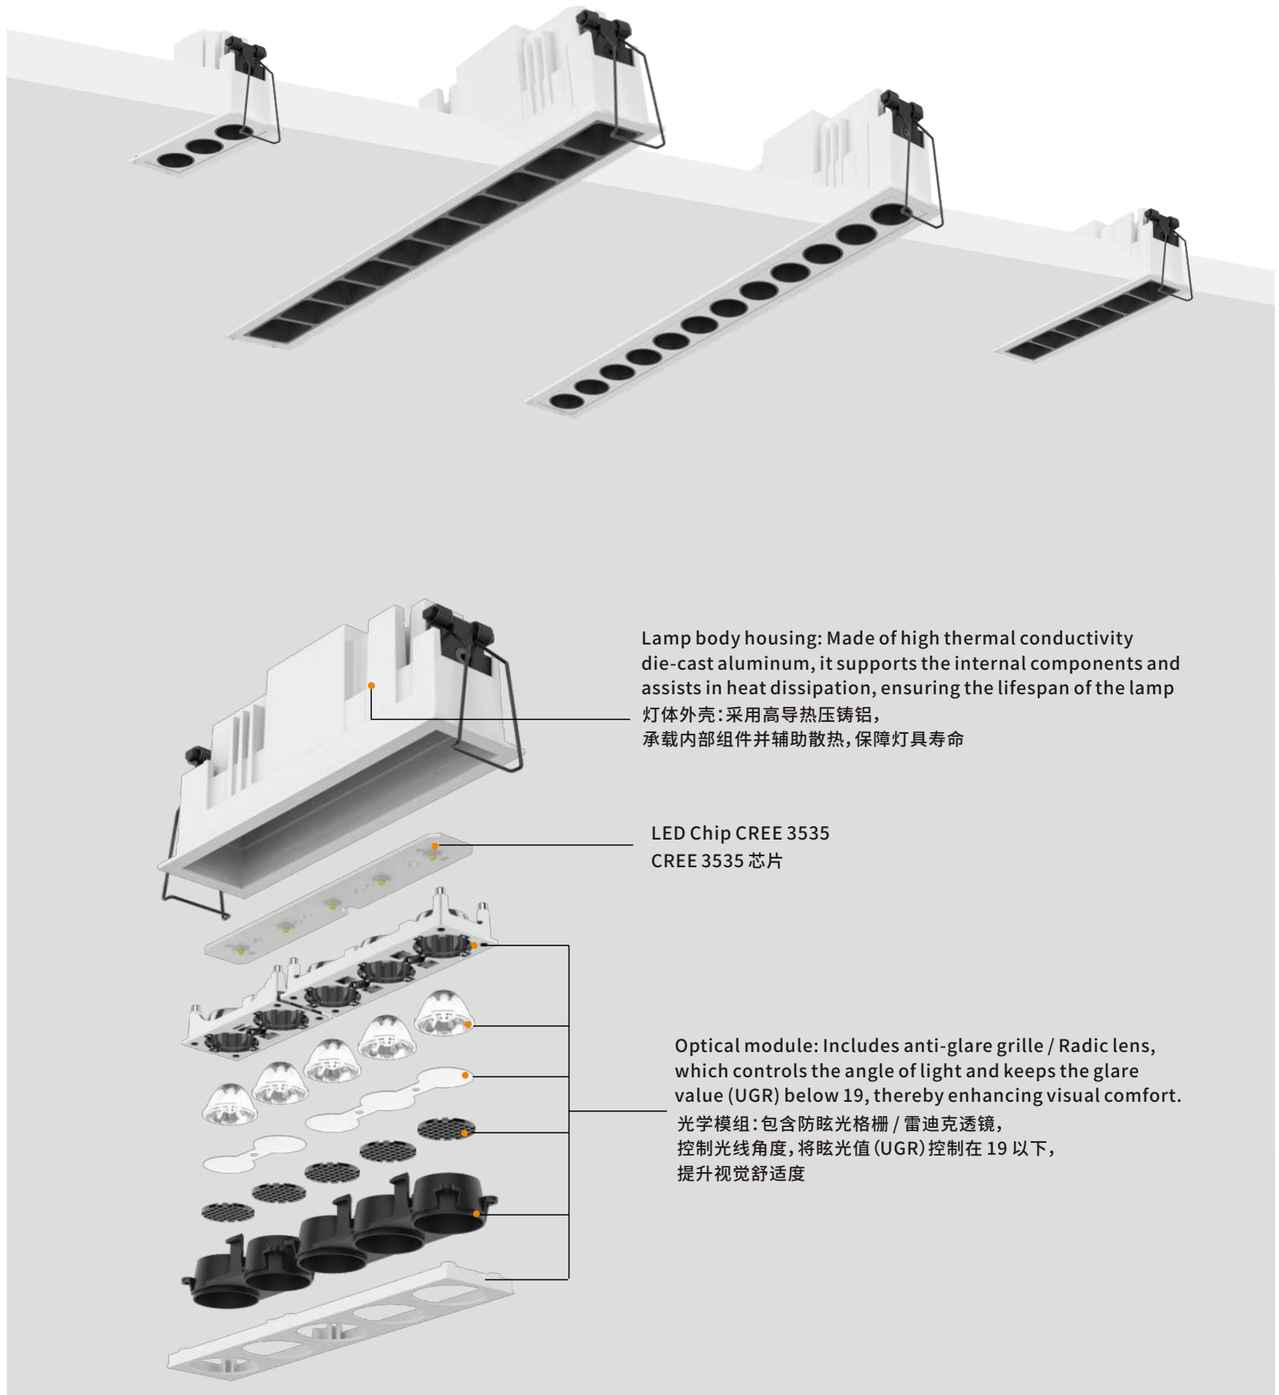

Lamp body housing: Made of high thermal conductivity die-cast aluminum, it supports the internal components and assists in heat dissipation, ensuring the lifespan of the lamp
灯体外壳：采用高导热压铸铝，
承载内部组件并辅助散热，保障灯具寿命

LED Chip CREE 3535
CREE 3535 芯片

Optical module: Includes anti-glare grille / Radic lens, which controls the angle of light and keeps the glare value (UGR) below 19, thereby enhancing visual comfort.
光学模组：包含防眩光格栅 / 雷迪克透镜，
控制光线角度，将眩光值（UGR）控制在 19 以下，
提升视觉舒适度

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L118.5*31.5*H55
开孔尺寸/Cutout (mm)	L112*25
功率/Power (W)	2W*5
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)
开孔/Cutout
L112*25





基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L140*31.5*H55
开孔尺寸/Cutout (mm)	L133*25
功率/Power (W)	2W*6
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)
开孔/Cutout
L133*25





基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L226.5*31.5*H55
开孔尺寸/Cutout (mm)	L222*25
功率/Power (W)	2W*10
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)
开孔/Cutout
L222*25



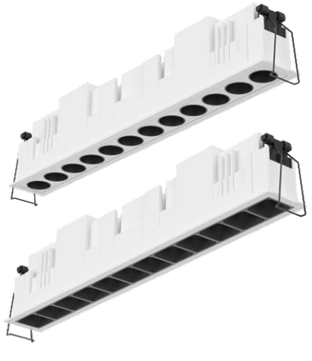

基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L269.5*31.5*H55
开孔尺寸/Cutout (mm)	L263*25
功率/Power (W)	2W*12
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)
开孔/Cutout
L263*25



i.SHA
THE ULTIMATE LIGHTING SOLUTION

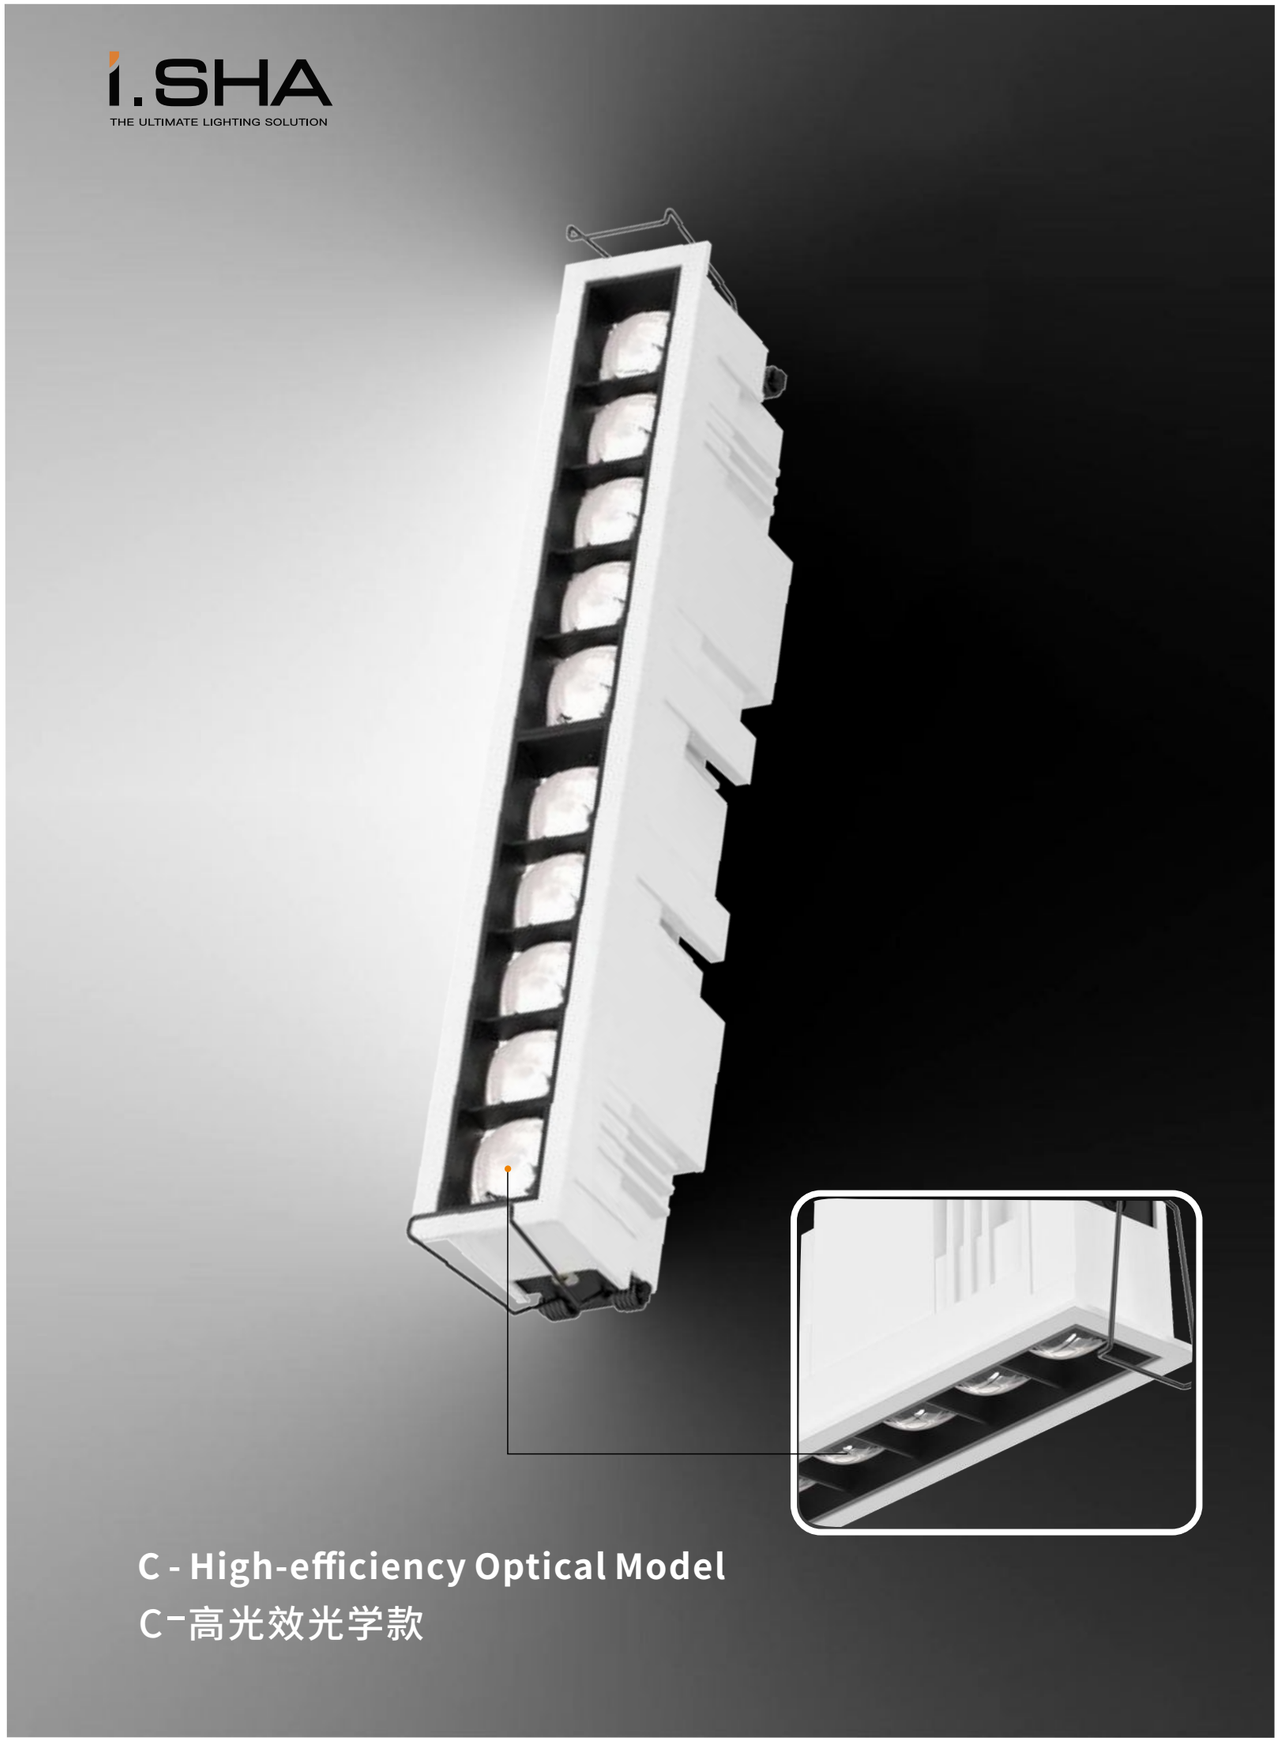

C - High-efficiency Optical Model

C-高光效光学款

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	75*31.5*H55
开孔尺寸/Cutout (mm)	L69*25
功率/Power (W)	3W*3
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	30° 40°

产品尺寸图/Dimension (mm)

开孔/Cutout
L69*25





基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L118.5*31.5*H55
开孔尺寸/Cutout (mm)	L112*25
功率/Power (W)	3W*5
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	30° 40°

产品尺寸图/Dimension (mm)

开孔/Cutout
L112*25



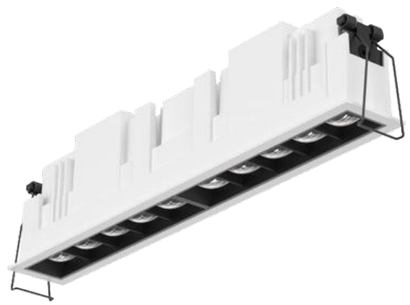

基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L226.5*31.5*H55
开孔尺寸/Cutout (mm)	L222*25
功率/Power (W)	3W*10
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	30° 40°

产品尺寸图/Dimension (mm)

开孔/Cutout
L222*25





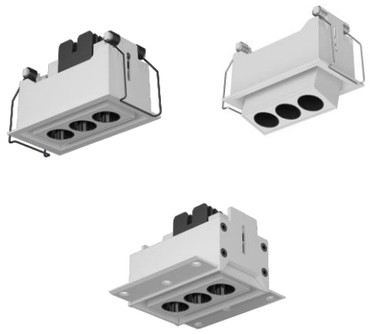

基本参数/Parameters

产品型号/Model	AC 9347 Line light 方/square
产品尺寸/Size (mm)	L85*46*H58 L76*80*H59
开孔尺寸/Cutout (mm)	L78*38 L78*45
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L78*38 L78*45





基本参数/Parameters

产品型号/Model	AC 9347 Line light 方/square
产品尺寸/Size (mm)	L142*46*H58 L133*80*H59
开孔尺寸/Cutout (mm)	L135*38 L135*45
功率/Power (W)	2W*6
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L135*38 L135*45



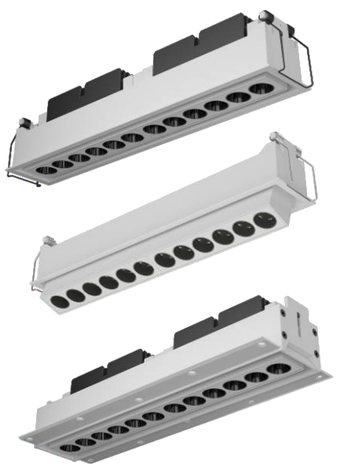

基本参数/Parameters

产品型号/Model	AC 9347 Line light 方/square
产品尺寸/Size (mm)	L259*46*H58 L251*80*H59
开孔尺寸/Cutout (mm)	L252*38 L253*45
功率/Power (W)	2W*12
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L252*38 L253*45



i.SHA
THE ULTIMATE LIGHTING SOLUTION

AC 9347 Grille series

Comprehensive upgrade, with more powerful functions

全面升级，功能更强大

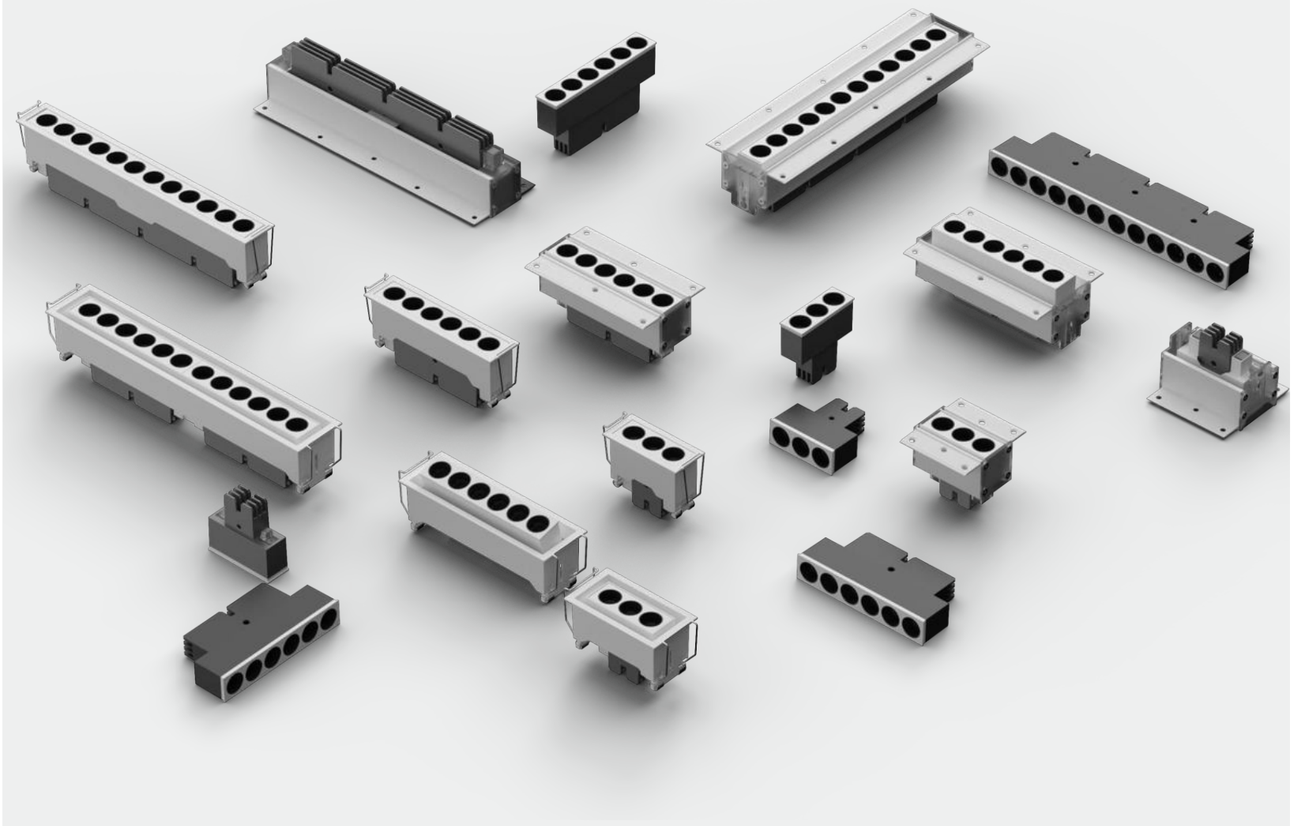

Comprehensive upgrade in terms of the exquisite size, its flexible module design and adjustable functions. With bezels, without borders, lamp head adjustment, precisely meeting the lighting needs of various spaces.

全面升级精巧体积与其灵活的模组设计与自由调节功能，有边款，无边框，
灯头调节，精准满足多样化空间的照明需求

i.SHA
THE ULTIMATE LIGHTING SOLUTION





基本参数/Parameters

产品型号/Model	AC 9347 Line light 方/square
产品尺寸/Size (mm)	L70*32*H58 L65*70*H58
开孔尺寸/Cutout (mm)	L63*25 L67*35
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L63*25 L67*35







基本参数/Parameters

产品型号/Model	AC 9347 Line light 方/square
产品尺寸/Size (mm)	L127*32*H58 L122*70*H58
开孔尺寸/Cutout (mm)	L120*25 L124*35
功率/Power (W)	2W*6
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L120*25 L124*35





基本参数/Parameters

产品型号/Model	AC 9347 Line light 方/square
产品尺寸/Size (mm)	L245*32*H58 L239*70*H58
开孔尺寸/Cutout (mm)	L240*25 L241*35
功率/Power (W)	2W*12
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L240*25 L241*35



i.SHA
THE ULTIMATE LIGHTING SOLUTION

KX 3140 系列防水筒灯

WATERPROFOF SERIES

i.SHA
THE ULTIMATE LIGHTING SOLUTION

i.SHA
THE ULTIMATE LIGHTING SOLUTION

一体式高效散热，前置式防水设计
INTEGRATED EFFICIENT HEAT DISSIPATION,
FRONT WATERPROOF DESIGN



i.SHA
THE ULTIMATE LIGHTING SOLUTION



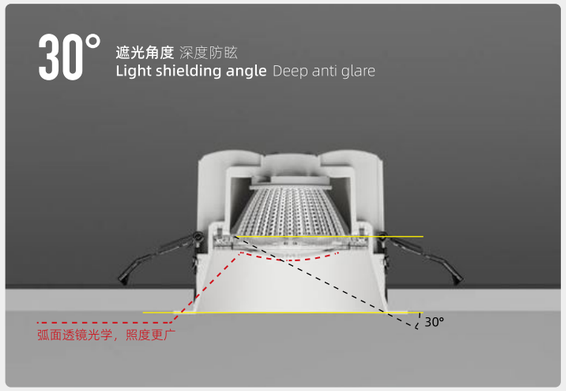

产品分解实物图
Product Breakdown Diagram



i.SHA
THE ULTIMATE LIGHTING SOLUTION

75mm



基本参数/Parameters

产品型号/Model	KX 3140 75-圆/Round
产品尺寸/Size (mm)	ϕ86*65H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	12W
光学配置/Holder	1304/1507/020 /030/1816
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)



145mm



基本参数/Parameters

产品型号/Model	KX 3140 145-圆/Round
产品尺寸/Size (mm)	ϕ160*90H
开孔尺寸/Cutout (mm)	ϕ145
功率/Power (W)	35-40W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)



95mm



基本参数/Parameters

产品型号/Model	KX 3140 95-圆/Round
产品尺寸/Size (mm)	ϕ108*77H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	20W
光学配置/Holder	1304/1507/020 /030/1816
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)



165mm



基本参数/Parameters

产品型号/Model	KX 3140 165-圆/Round
产品尺寸/Size (mm)	ϕ180*109H
开孔尺寸/Cutout (mm)	ϕ165
功率/Power (W)	40-45W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)



125mm



基本参数/Parameters

产品型号/Model	KX 3140 125-圆/Round
产品尺寸/Size (mm)	ϕ140*88H
开孔尺寸/Cutout (mm)	ϕ125
功率/Power (W)	30W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)



200mm



基本参数/Parameters

产品型号/Model	KX 3140 200-圆/Round
产品尺寸/Size (mm)	ϕ220*125.5H
开孔尺寸/Cutout (mm)	ϕ200
功率/Power (W)	50-55W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION

AC 9161 Yue悦系列

High lumen | Anti-glare | Waterproof and Fogproof
高流明 | 防眩目 | 防水防雾

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9161 75-圆/Round
产品尺寸/Size (mm)	ϕ83*65H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	AC 9161 95-圆/Round
产品尺寸/Size (mm)	ϕ103*70H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	20W
光学配置/Holder	1304/1507/020 /030/1816
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95





基本参数/Parameters

产品型号/Model	AC 9161 125-圆/Round
产品尺寸/Size (mm)	ϕ132*75H
开孔尺寸/Cutout (mm)	ϕ125
功率/Power (W)	30W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ125





基本参数/Parameters

产品型号/Model	AC 9161 150-圆/Round
产品尺寸/Size (mm)	ϕ160*80H
开孔尺寸/Cutout (mm)	ϕ150
功率/Power (W)	40W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ150



AC 9161 Yue悦系列

High lumen | Anti-glare | Waterproof and Fogproof

高流明 | 防眩目 | 防水防雾

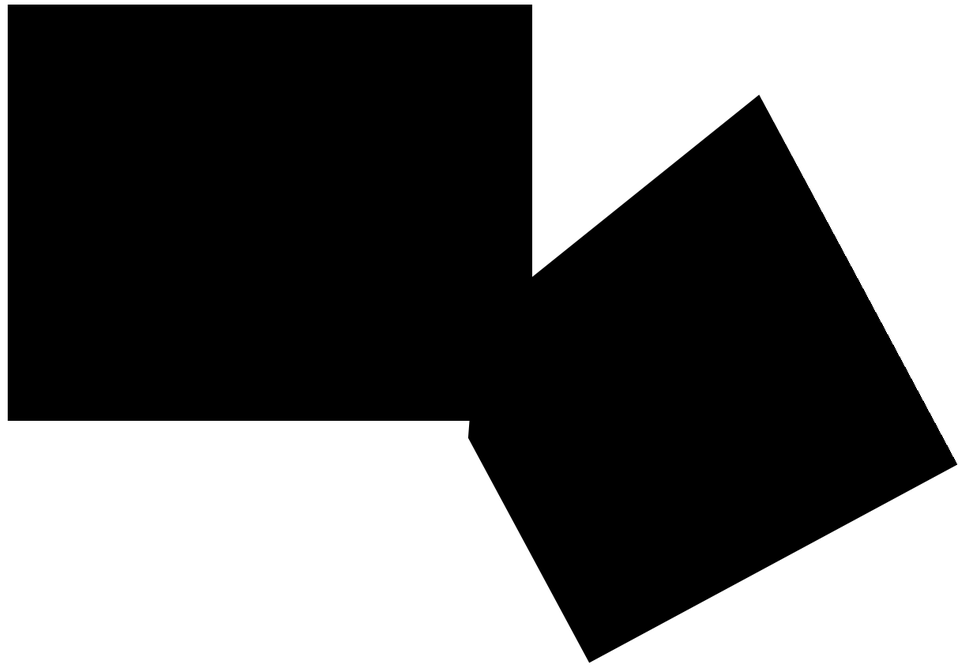



基本参数/Parameters

产品型号/Model	AC 9161 170-圆/Round
产品尺寸/Size (mm)	φ180*85H
开孔尺寸/Cutout (mm)	φ170
功率/Power (W)	40-45W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout

φ170





基本参数/Parameters

产品型号/Model	AC 9161 170-圆/Round
产品尺寸/Size (mm)	φ180*85H
开孔尺寸/Cutout (mm)	φ170
功率/Power (W)	50W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout

φ170



Bright moon series

KX 3085 皓月系列





90°



15°-60°



柔光



To meet the design requirements of more spaces for light, the Avera series
Equipped with three optical systems respectively, which can be freely switched.

90° beam angle, 40° cutoff angle + 15° to 60° distribution + super soft light

At the same time, the lens model can be equipped with cellular networks and various optical accessories.
Properly meeting the requirements for multi-space and multi-purpose applications

为满足更多空间对光的设计需求皓影系列
分别搭载三大光学系统自由切换

90°出光 40°截光角 + 15°~60°配光 + 超级柔光

同时可以透镜款添加蜂窝网及各种光学配件
真正满足多空间多用途应用

适用于：

酒店、商场、服装店、办公室、家居等照明场所。

Hotel, shopping mall, clothing store, office, home and other lighting venues.

i.SHA
THE ULTIMATE LIGHTING SOLUTION



Bright moon series

KX 3085 皓月系列

15°24°36°60°



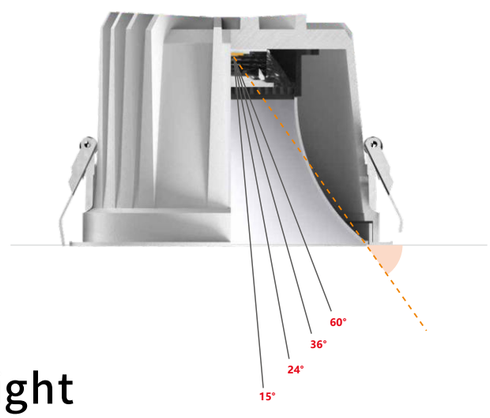

The angle determines the height
角度决定高度

Designed specifically to meet the space height requirements of 3-12 meters, it is equipped with the 60°, 36°, 24°, and 15° series of optical distribution optics.
专为满足层高3-12米空间高度量身定制，搭载60°36°24°15°系列光学配光

Customized multi-color anti-glare covers are available, adding more interesting colors to the space.
多种色彩防眩罩工艺定制，为空间增添更多趣味性色彩

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX3085-A 75-圆/Round
产品尺寸/Size (mm)	ϕ82*52.5H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	7W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	KX3085-A 95-圆/Round
产品尺寸/Size (mm)	ϕ101*69H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	15W
光学配置/Holder	1304/1507/020/1816/030
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95





基本参数/Parameters

产品型号/Model	KX3085-A 130-圆/Round
产品尺寸/Size (mm)	ϕ137*97H
开孔尺寸/Cutout (mm)	ϕ130
功率/Power (W)	25W
光学配置/Holder	1507/020/1816/030/040
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ130



i.SHA
THE ULTIMATE LIGHTING SOLUTION



Bright moon series

KX 3085 皓月系列

Super Floodlight Series超级泛光系列

Outlight 90° Cut-off angle 40°
出光90° 截光角40°

Large spacing for installing lamps, uniform light spots at different heights, and comfortable visual effect
安装灯具间距大 高度的均匀性光斑 舒适的视觉效果

适合超高均匀度的高级空间场所应用
Suitable for advanced spatial applications with extremely high uniformity

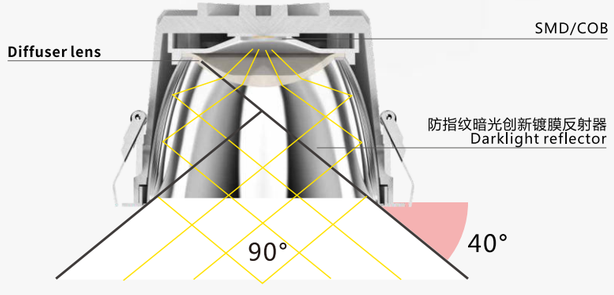

UGR <19

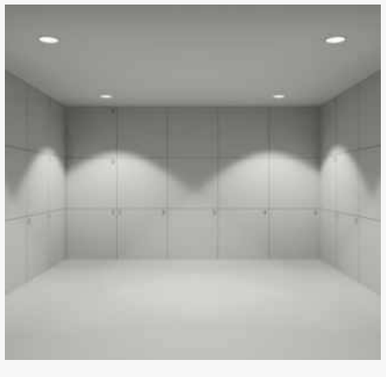

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX3085-A 75-圆/Round
产品尺寸/Size (mm)	ϕ82*52.5H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	7W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	90°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	KX3085-A 95-圆/Round
产品尺寸/Size (mm)	ϕ101*69H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	15W
光学配置/Holder	1304/1507/020/1816/030
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	90°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95





基本参数/Parameters

产品型号/Model	KX3085-B 130-圆/Round
产品尺寸/Size (mm)	ϕ137*97H
开孔尺寸/Cutout (mm)	ϕ130
功率/Power (W)	25W
光学配置/Holder	1507/020/1816/030/040
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	90°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ130



i.SHA
THE ULTIMATE LIGHTING SOLUTION



Bright moon series

KX 3085 皓月系列

Let the light blend seamlessly with the space.
让灯光与空间融为一体

Innovative soft-light optical design, eliminating the boundary concept of lamps, allowing the light to truly blend into the ceiling, making the space itself more captivating.

创新柔光光学设计，消融灯具边界设计理念，让光线真正融入天花，让空间本身更魅力

Let the light truly blend into the ceiling, making the space even more captivating.
Adapt to the color temperature adjustment of the full-color spectrum light source.
The light spots remain perfectly soft. Enjoy a comfortable life. Start from here....

让光线真正融入天花，让空间本身更魅力，适应全色域光源色温调节变化，
光斑依然完美柔和，享受舒适生活，从这里开始...

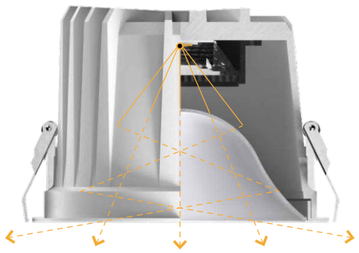



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX3085-A 75-圆/Round
产品尺寸/Size (mm)	ϕ82*52.5H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	7W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	110°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	KX3085-A 95-圆/Round
产品尺寸/Size (mm)	ϕ101*69H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	15W
光学配置/Holder	1304/1507/020/1816/030
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	110°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95





基本参数/Parameters

产品型号/Model	KX3085-B 130-圆/Round
产品尺寸/Size (mm)	ϕ137*97H
开孔尺寸/Cutout (mm)	ϕ130
功率/Power (W)	25W
光学配置/Holder	1507/020/1816/030/040
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	110°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ130



i.SHA
THE ULTIMATE LIGHTING SOLUTION

i.SHA
THE ULTIMATE LIGHTING SOLUTION

Surface ceiling light

KX 3182 Tammy塔米系列

High lumen | Anti-glare | Waterproof and anti-fog
High-altitude tube light
高流明 | 防眩目 | 防水防雾 | 高空筒灯

i.SHA
THE ULTIMATE LIGHTING SOLUTION







基本参数/Parameters

产品型号/Model	KX 3182 114-圆/Round
产品尺寸/Size (mm)	ϕ114*152H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	25W
光学配置/Holder	020 /030/040/1507/1816
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)







基本参数/Parameters

产品型号/Model	KX 3182 138-圆/Round
产品尺寸/Size (mm)	ϕ138*163H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	30W
光学配置/Holder	020 /030/040/1507/1816
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION

Surface ceiling light

KX 3182 Tammy塔米系列

High lumen | Anti-glare | Waterproof and anti-fog
High-altitude tube light
高流明 | 防眩目 | 防水防雾 | 高空筒灯



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3182 170-圆/Round
产品尺寸/Size (mm)	ϕ170*182H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	50W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX 3182 206-圆/Round
产品尺寸/Size (mm)	ϕ206*215H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	80W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX 3182 236-圆/Round
产品尺寸/Size (mm)	ϕ236*240H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	100W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)







i.SHA
THE ULTIMATE LIGHTING SOLUTION

Surface ceiling light

AC 9197 Mandy曼迪系列

High lumen | Anti-glare | Concealed ceiling light

高流明 | 防眩目 | 明装筒灯

i.SHA
THE ULTIMATE LIGHTING SOLUTION







基本参数/Parameters

产品型号/Model	AC 9197 圆/Round			
产品尺寸/Size (mm)	Φ180*230H			
	Φ200*270H			
	Φ240*300H			
功率/Power (W)	30-50W	60-80W	70-100W	
光学配置/Holder	020 /030/040/1507/1816/2520			
防水等级/IP Level	IP 20			
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black			
光学角度/Beam Angle (°)	15°	24°	38°	60°



产品尺寸图/Dimension (mm)

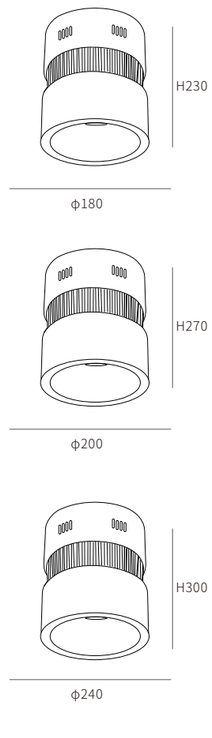

i.SHA
THE ULTIMATE LIGHTING SOLUTION

Surface mounted ceiling light

AC 9076 Aden艾顿系列

High lumen | Anti-glare | Concealed ceiling pendant light

高流明 | 防眩目 | 明装筒灯



i.SHA
THE ULTIMATE LIGHTING SOLUTION

产品分解实物图
Product Breakdown Diagram

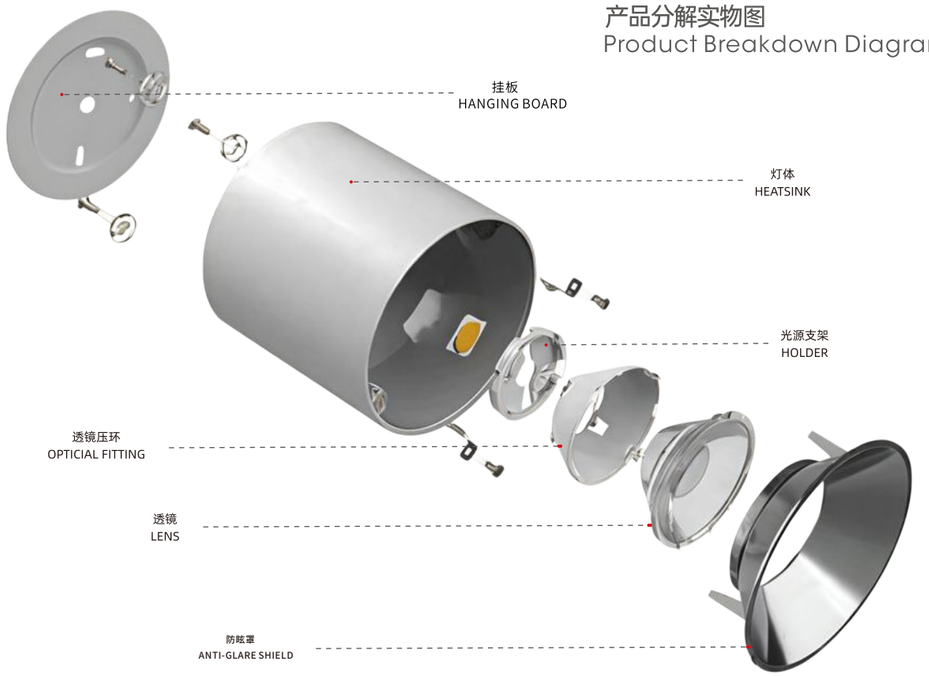

基本参数/Parameters

产品尺寸图/Dimension (mm)



产品型号/Model	AC 9076 77-圆/Round
产品尺寸/Size (mm)	ϕ77*85H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	6W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°



基本参数/Parameters

产品尺寸图/Dimension (mm)



产品型号/Model	AC 9076 100-圆/Round
产品尺寸/Size (mm)	ϕ100*90H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°



i.SHA
THE ULTIMATE LIGHTING SOLUTION







Surface mounted ceiling light

AC 9076 Aden艾顿系列

High lumen | Anti-glare | Concealed ceiling pendant light

高流明 | 防眩目 | 明装筒灯

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9076 120-圆/Round
产品尺寸/Size (mm)	ϕ120*100H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	20W
光学配置/Holder	020 /030/040/1507
防水等级/IP Level	IP20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	Ac9076 150-圆/Round
产品尺寸/Size (mm)	ϕ150*120H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	30W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	Ac9076 175-圆/Round
产品尺寸/Size (mm)	ϕ175*130H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	35W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9076 200-圆/Round
产品尺寸/Size (mm)	ϕ200*140H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	40-45W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION



Adjustable focal length



TRACK LIGHT

KX 3090 Hawkeye 鹰眼系列

Focus adjustment | Anti-glare
Commercial track-mounted spotlights
调焦 | 防眩目 | 商业轨道射灯

i.SHA
THE ULTIMATE LIGHTING SOLUTION

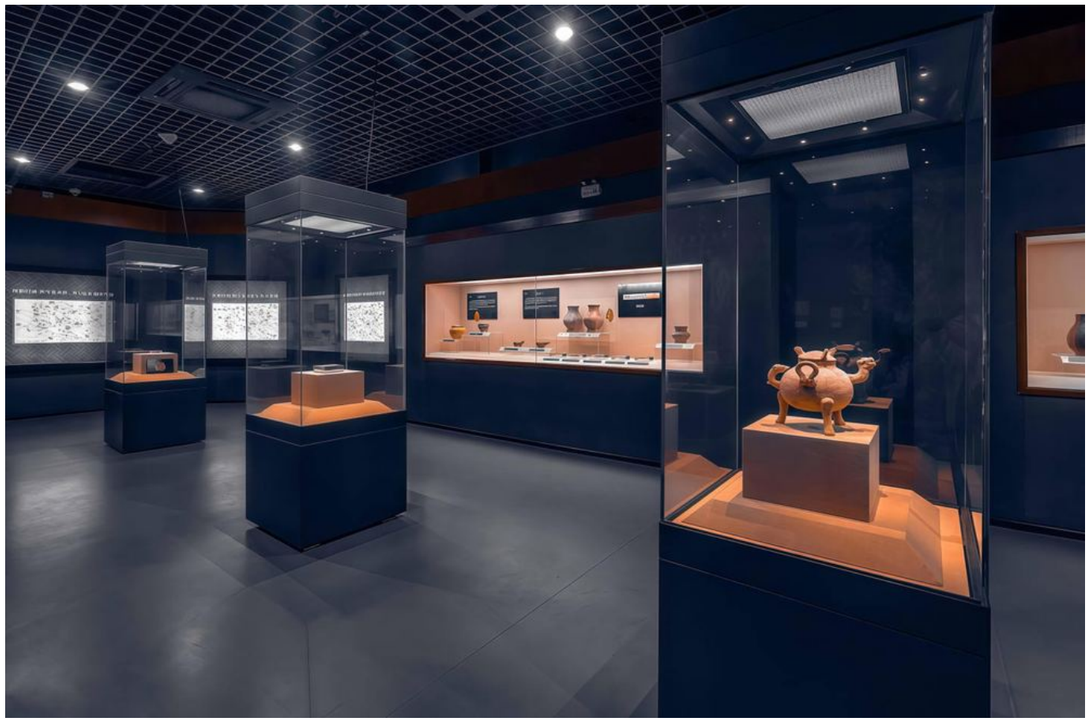

基本参数/Parameters

产品型号/Model	KX 3090 轨道调焦款
产品尺寸/Size (mm)	ϕ55*115H
	ϕ65*135H
	ϕ75·150H
	ϕ85·165H
功率/Power (W)	12W 18W 25W 35W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

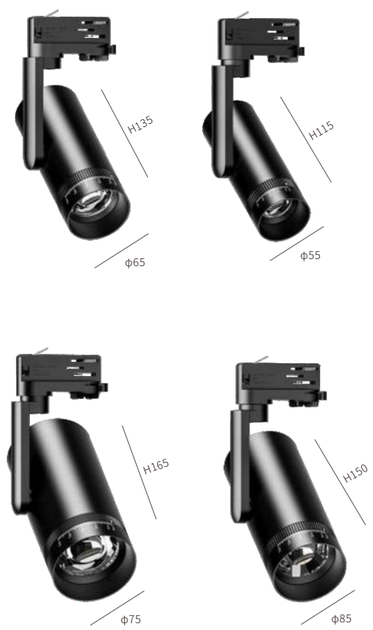

i.SHA
THE ULTIMATE LIGHTING SOLUTION



TRACK LIGHT

KX 3090 Hawkeye 鹰眼系列

Anti-glare | Commercial Track Spotlights
防眩目 | 商业轨道射灯







i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3090 轨道款
产品尺寸/Size (mm)	ϕ55*115H
	ϕ65*135H
	ϕ75·150H
	ϕ85·165H
功率/Power (W)	12W 18W 25W 35W
光学配置/Holder	020 /030/040/1507/1816/2520

防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

i.SHA
THE ULTIMATE LIGHTING SOLUTION



KX 3092 曼迪系列
TRACKLIGHT

防眩目 | 商业轨道射灯

光学角度/Beam







隐藏式轨道灯





i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3092 轨道款
产品尺寸/Size (mm)	ϕ54*110H
	ϕ68*130H
	ϕ85·140H
功率/Power (W)	12W 20W 30W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°





i.SHA
THE ULTIMATE LIGHTING SOLUTION



Track spotlight type

AC 9279 轨道款

Adjustable focal length

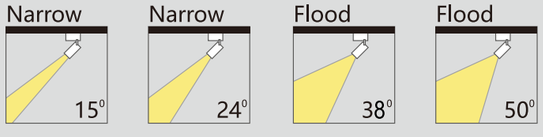



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9279-TR 48-圆/Round
产品尺寸/Size (mm)	φ48*105*165H
功率/Power (W)	10W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC9279-TR 55-圆/Round
产品尺寸/Size (mm)	φ55*130*180H
功率/Power (W)	15W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9279-TR 65-圆/Round
产品尺寸/Size (mm)	φ65*150*215H
功率/Power (W)	25W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9279-TR 75-圆/Round
产品尺寸/Size (mm)	φ75*150*215H
功率/Power (W)	30W
光学配置/Holder	020/030/040/1507/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9279-TR 85-圆/Round
产品尺寸/Size (mm)	φ85*175*240H
功率/Power (W)	35W
光学配置/Holder	020/030/040/1507/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION



Surface-mounted ceiling type

AC 9279 明装吸顶款

Adjustable focal length

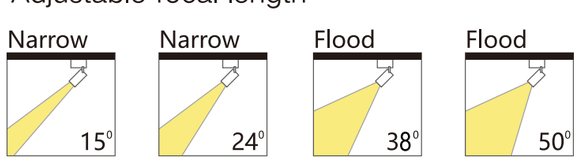



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9279-SF 48-圆/Round
产品尺寸/Size (mm)	φ48*105*149H
功率/Power (W)	10W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC9279-SF 55-圆/Round
产品尺寸/Size (mm)	φ55*130*174H
功率/Power (W)	15W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9279-SF 65-圆/Round
产品尺寸/Size (mm)	φ65*150*195H
功率/Power (W)	25W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9279-SF 75-圆/Round
产品尺寸/Size (mm)	φ75*150*200H
功率/Power (W)	30W
光学配置/Holder	020/030/040/1507/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9279-SF 85-圆/Round
产品尺寸/Size (mm)	φ85*175*225H
功率/Power (W)	35W
光学配置/Holder	020/030/040/1507/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)







基本参数/Parameters

产品型号/Model	AC 9279-CL 48-圆/Round
产品尺寸/Size (mm)	φ48*105*126H
功率/Power (W)	10W
开孔尺寸/Cutout (mm)	φ55
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ55





基本参数/Parameters

产品型号/Model	AC 9279-CL 55-圆/Round
产品尺寸/Size (mm)	φ55*130*126H
功率/Power (W)	15W
开孔尺寸/Cutout (mm)	φ55
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ55





基本参数/Parameters

产品型号/Model	AC 9279-CL 65-圆/Round
产品尺寸/Size (mm)	φ65*150*171H
功率/Power (W)	25W
开孔尺寸/Cutout (mm)	φ75
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ75





基本参数/Parameters

产品型号/Model	AC 9279-CL 75-圆/Round
产品尺寸/Size (mm)	φ75*150*171H
功率/Power (W)	30W
开孔尺寸/Cutout (mm)	φ75
光学配置/Holder	020/030/040/1507/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ75





基本参数/Parameters

产品型号/Model	AC 9279-CL 85-圆/Round
产品尺寸/Size (mm)	φ85*175*197H
功率/Power (W)	35W
开孔尺寸/Cutout (mm)	φ95
光学配置/Holder	020/030/040/1507/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ95



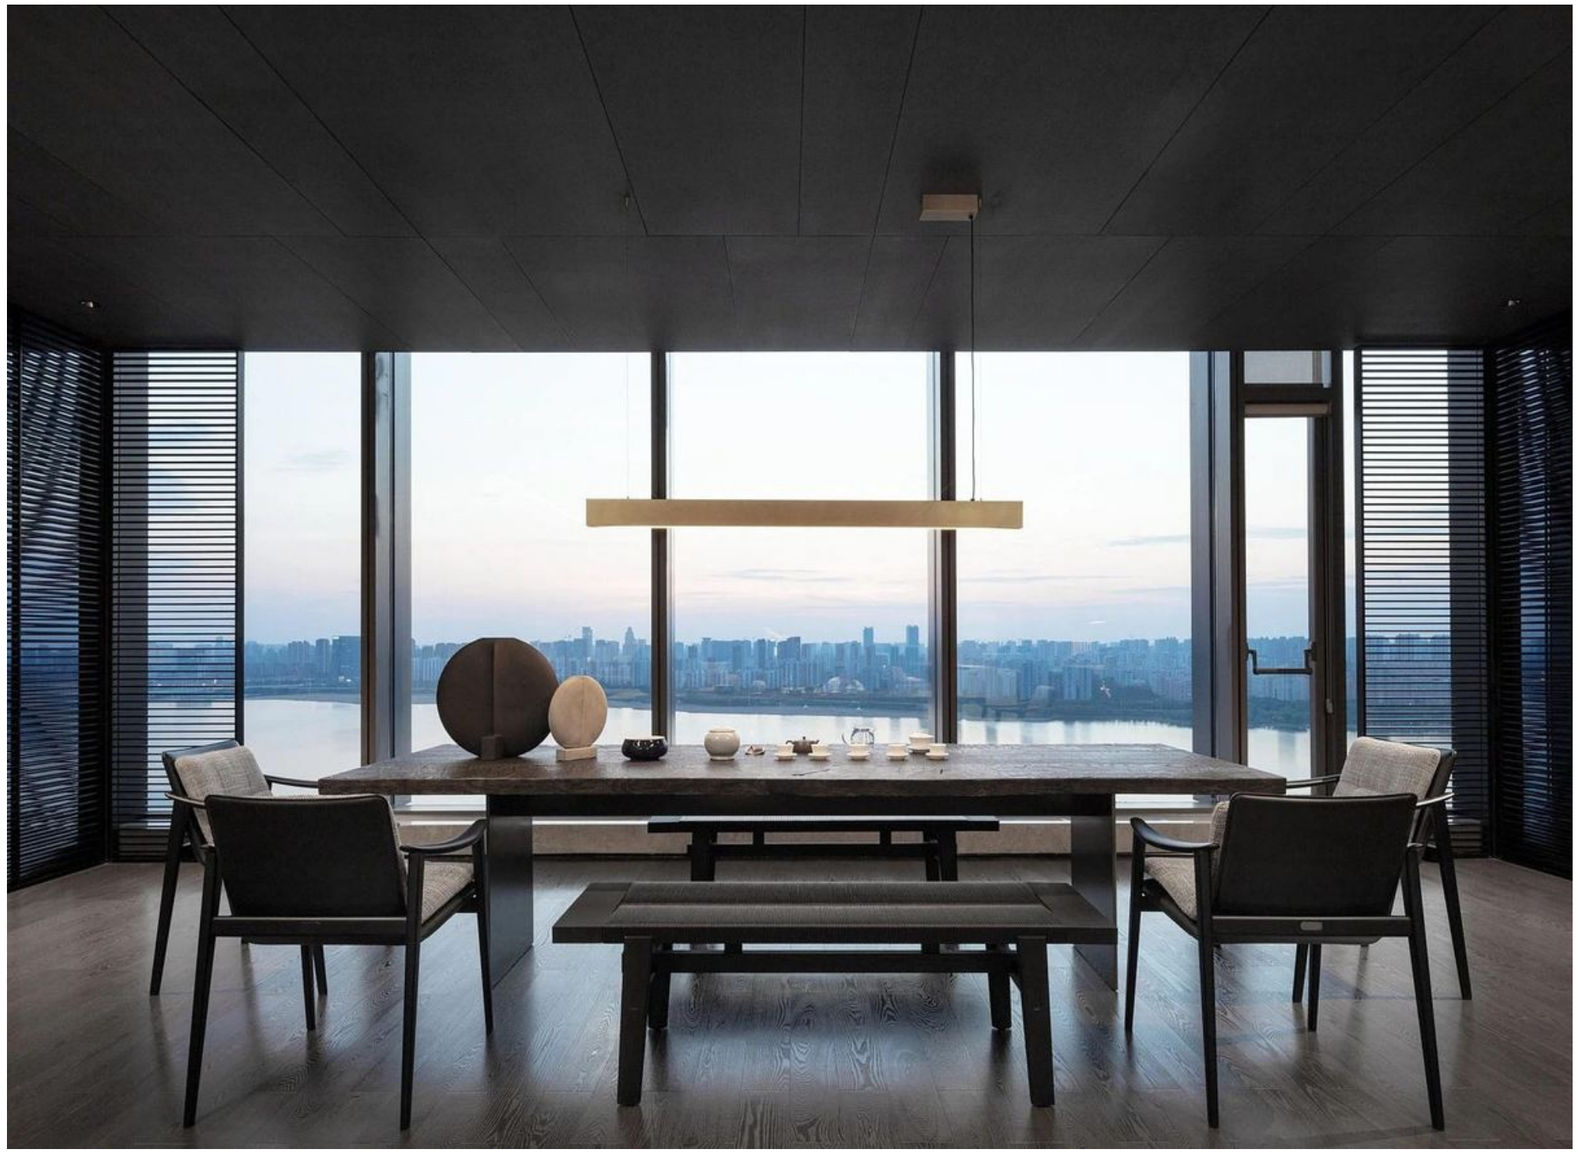

i.SHA
THE ULTIMATE LIGHTING SOLUTION



Line light series 线条灯系列

背发光细节图

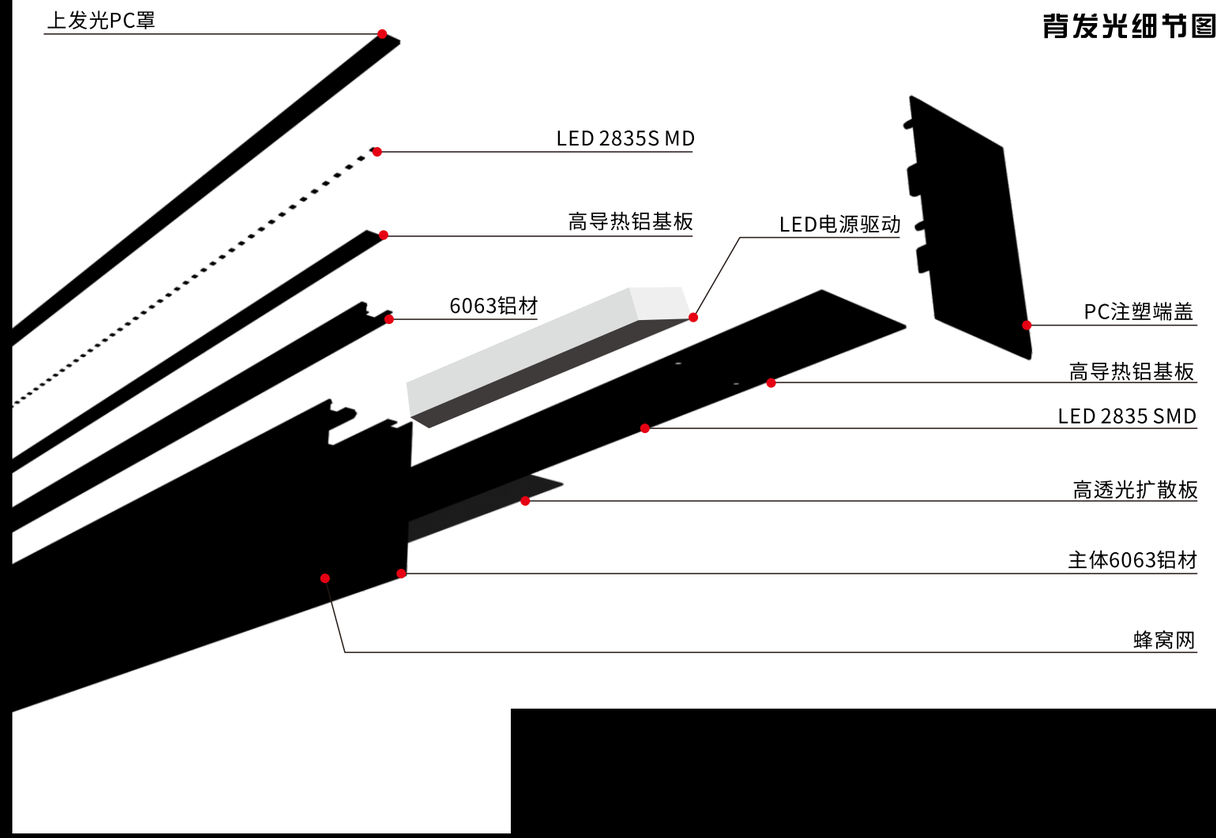

UGR<16

发光角度

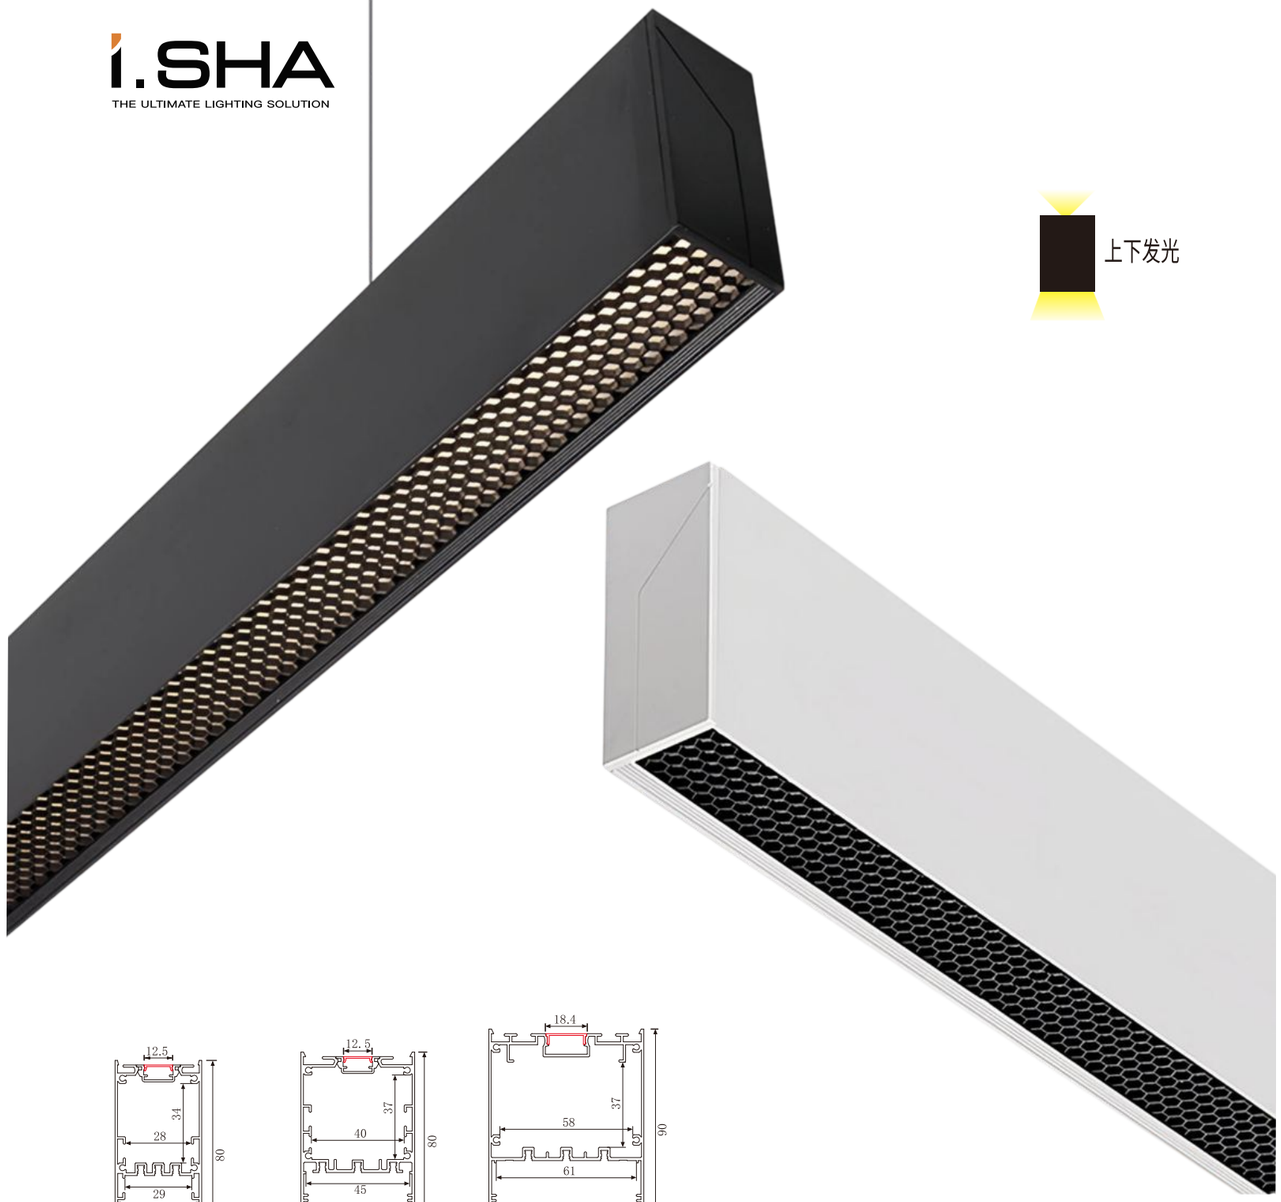

上下发光

i.SHA
THE ULTIMATE LIGHTING SOLUTION







IS 2008 Line light series线条灯系列

Wattage	Size(mm)	Cut out(mm)	Material	IP Grade	Beam Angle	CRI	Luminous flux	Color	CCT
40W	L1200*W38*H80	/	Die-casting aluminum	IP20	120*80°	≥90	140Lm/w	White Black	3000K 4000K 6000K
60W	L1200*W50*H80				120*85°				
80W	L1200*W68*H90				120*95°				

IS 2001-IS 2006 Line light series线条灯系列

Wattage	Size(mm)	Cut out(mm)	Material	IP Grade	Beam Angle	CRI	Luminous flux	Color	CCT
36W	L1200*W38*H70	/	Die-casting aluminum	IP20	110°	≥90	100Lm/w	White Black	3000K 4000K 6000K
36W	L1200*W38*H70	/	Die-casting aluminum	IP20	30°45°	≥90	100Lm/w	White Black	3000K 4000K 6000K

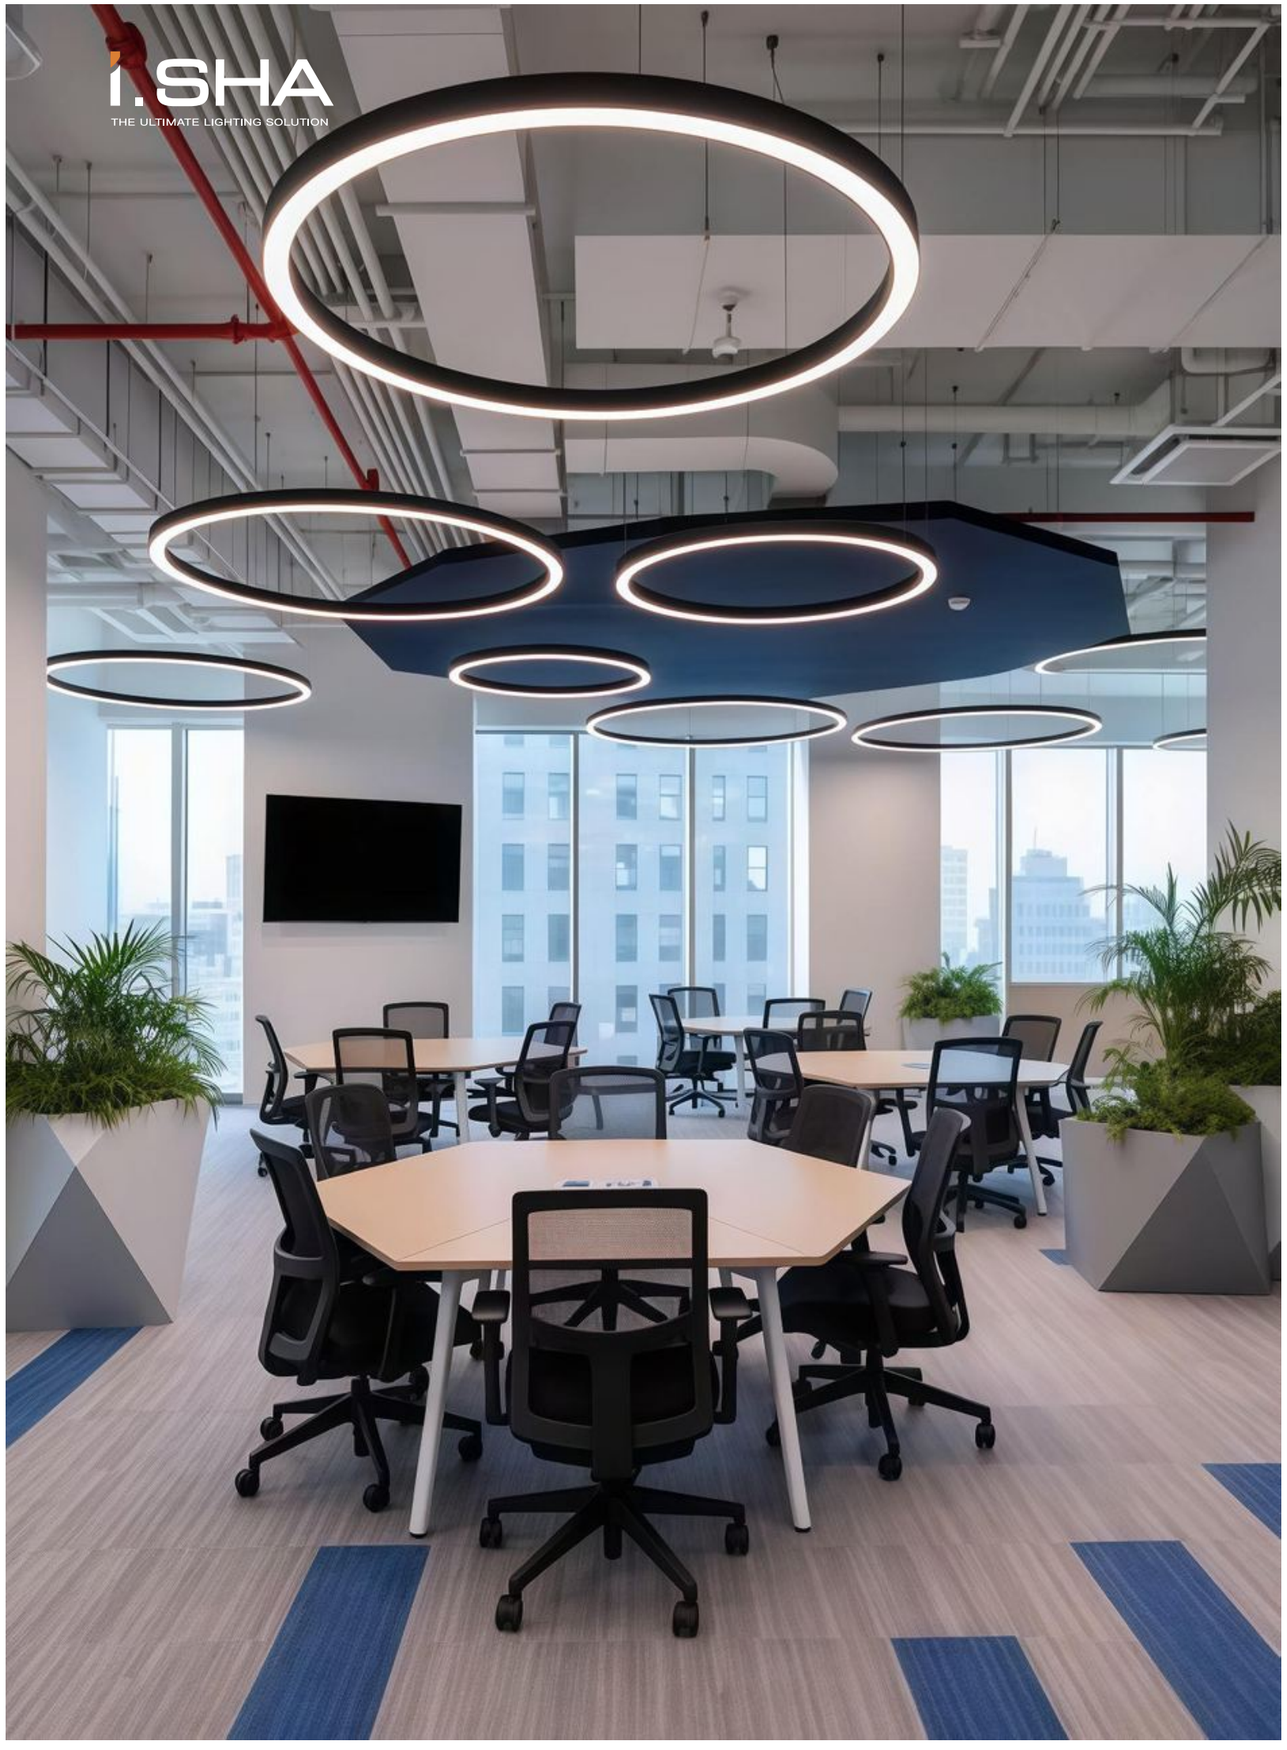



定制拼接/圆弧办公线条Customized joined/arc-shaped office lines

IS 2001-IS 2006

Wattage	Size(mm)	Cut out(mm)	Material	IP Grade	Beam Angle	CRI	Luminous flux	Color	CCT
36W	W38*H70	/	Die-casting aluminum	IP20	110°	≥90	100Lm/w	White Black	3000K 4000K 6000K
48W	W50*H80	/	Die-casting aluminum	IP20	30°45°	≥90	100Lm/w	White Black	3000K 4000K 6000K











可选样式
Optional styles





IS 2009 Line light series线条灯系列

Wattage	Size(mm)	Cut out(mm)	Material	IP Grade	Beam Angle	CRI	Luminous flux	Color	CCT
36W	L1200*W16*H70	/	Die-casting aluminum	IP20	15°30°45°	⩾90	100Lm/w	White Black	3000K 4000K 6000K

IS 2010 Line light series线条灯系列

Wattage	Size(mm)	Cut out(mm)	Material	IP Grade	Beam Angle	CRI	Luminous flux	Color	CCT
36W	L1200*W22*H25	/	Die-casting aluminum	IP20	110°	⩾90	100Lm/w	White Black	3000K 4000K 6000K

i.SHA

THE ULTIMATE LIGHTING SOLUTION

















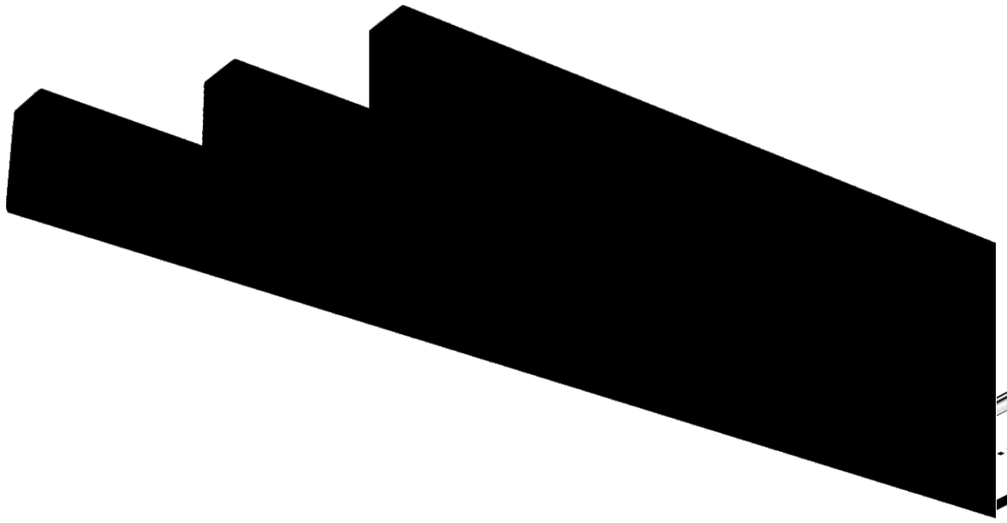

分解图

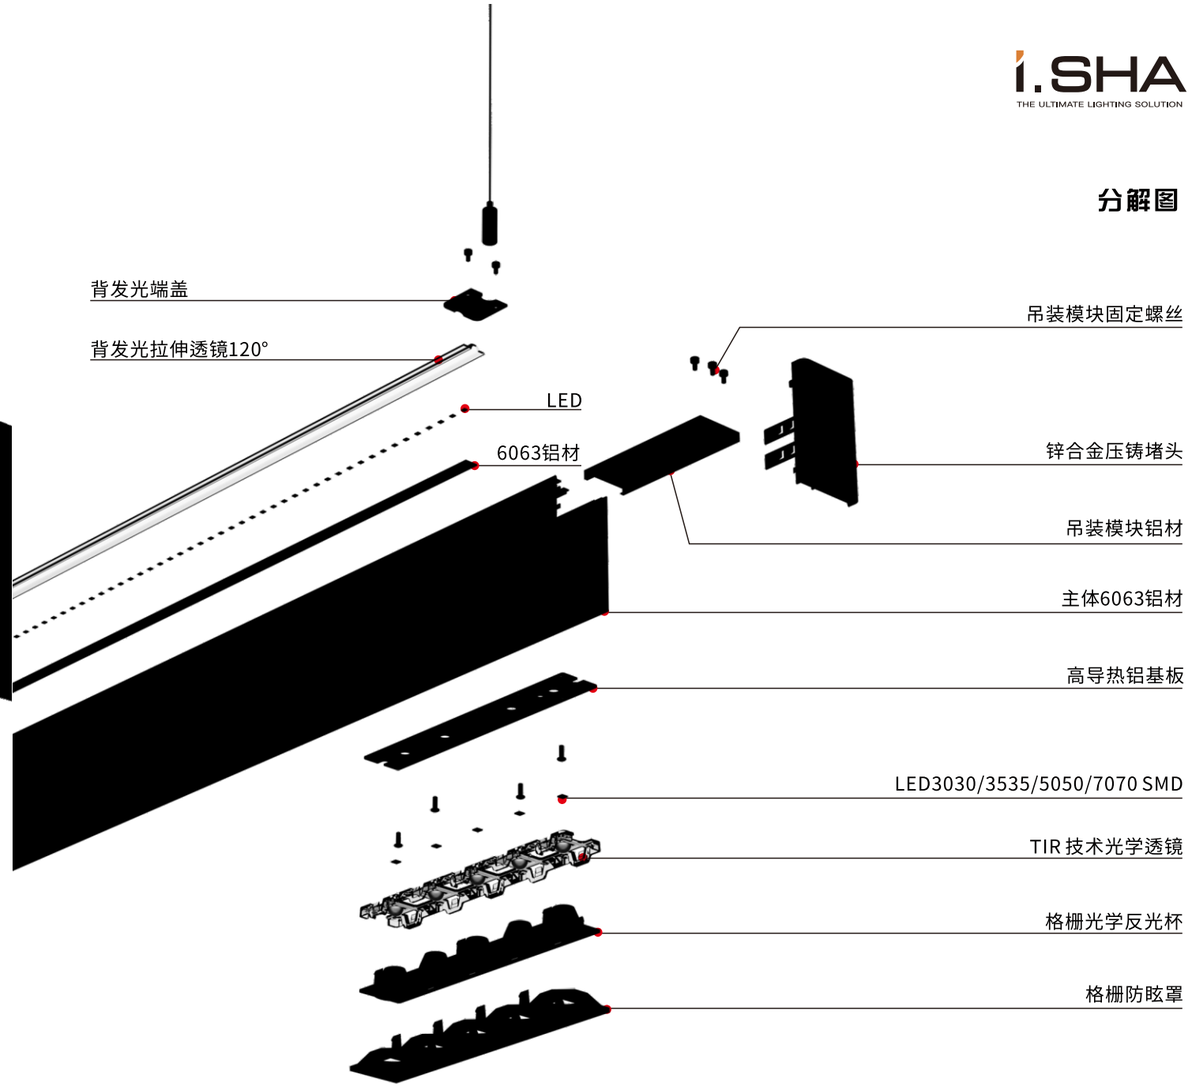

➤ 透镜/反光杯光学系列

Lens/Reflector Optical Series

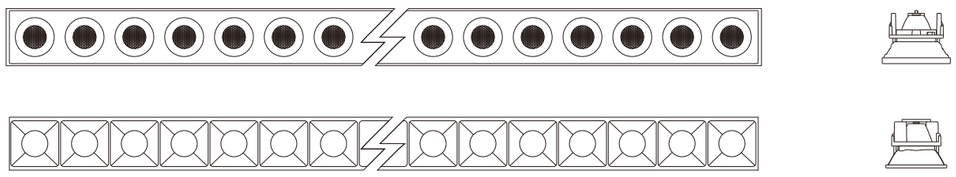

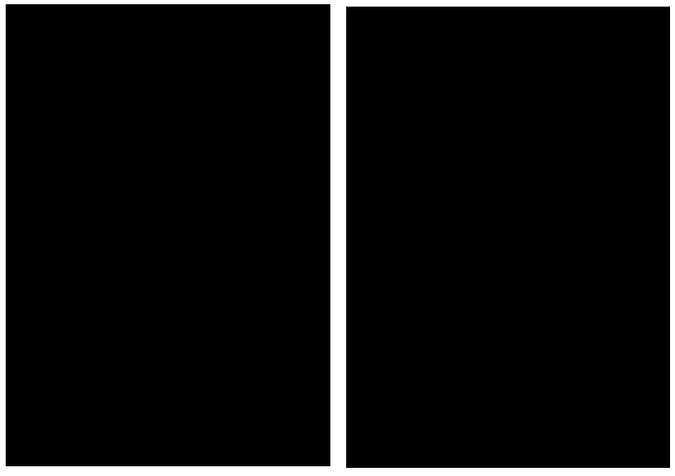

光学透镜/反光杯角度

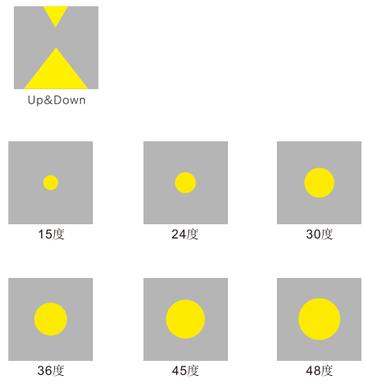

背发光细节图

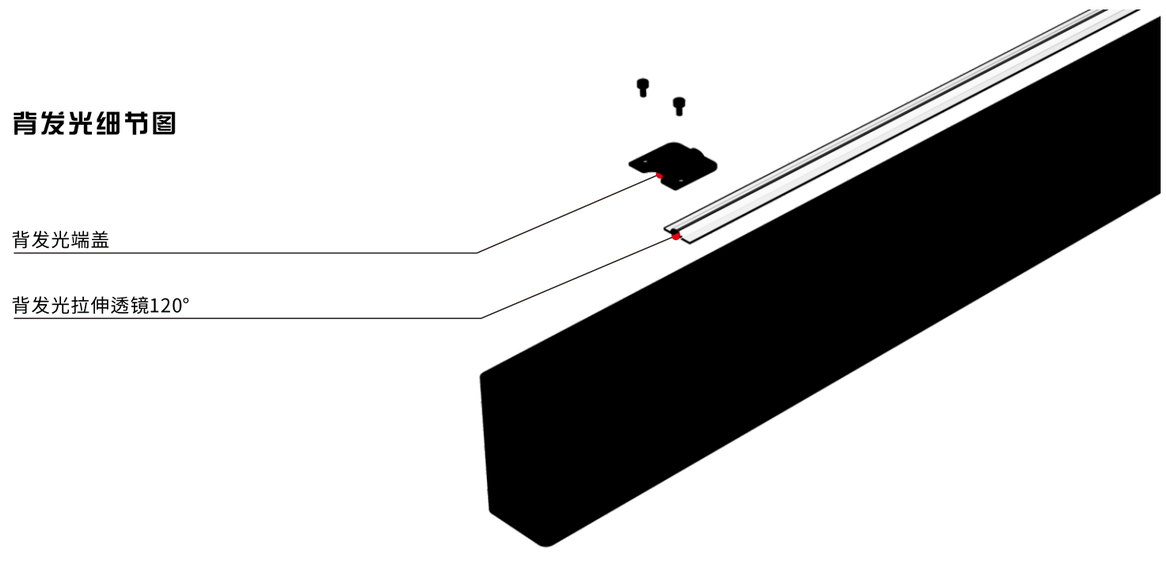

应用场景

适用于办公照明、商业照明、家居照明等场景

无频闪，防眩光



IS 1050 Line light series线条灯系列

Wattage	Size(mm)	Cut out(mm)	Material	IP Grade	Beam Angle	CRI	Luminous flux	Color	CCT
28W	L1200*W10*H50	/	Die-casting aluminum	IP20	30°	≥90	140Lm/w	White Black	3000K 4000K 6000K



IS 1560 Line light series线条灯系列

Wattage	Size(mm)	Cut out(mm)	Material	IP Grade	Beam Angle	CRI	Luminous flux	Color	CCT
28W	L1200*W15*H60	/	Die-casting aluminum	IP20	30°	≥90	140Lm/w	White Black	3000K 4000K 6000K



IS 1770 Line light series线条灯系列

Wattage	Size(mm)	Cut out(mm)	Material	IP Grade	Beam Angle	CRI	Luminous flux	Color	CCT
28W	L1200*W17*H70	/	Die-casting aluminum	IP20	30°	≥90	140Lm/w	White Black	3000K 4000K 6000K



IS 2180 Line light series线条灯系列

Wattage	Size(mm)	Cut out(mm)	Material	IP Grade	Beam Angle	CRI	Luminous flux	Color	CCT
28W	L1200*W20*H80	/	Die-casting aluminum	IP20	30°	≥90	140Lm/w	White Black	3000K 4000K 6000K



IS 3880 Line light series线条灯系列

Wattage	Size(mm)	Cut out(mm)	Material	IP Grade	Beam Angle	CRI	Luminous flux	Color	CCT
48W	L1200*W38*H80	/	Die-casting aluminum	IP20	30°	≥90	140Lm/w	White Black	3000K 4000K 6000K



IS 5080 Line light series线条灯系列

Wattage	Size(mm)	Cut out(mm)	Material	IP Grade	Beam Angle	CRI	Luminous flux	Color	CCT
48W	L1200*W50*H80	/	Die-casting aluminum	IP20	30°	≥90	140Lm/w	White Black	3000K 4000K 6000K

i.SHA
THE ULTIMATE LIGHTING SOLUTION

LED 三防线条灯

Line light series

IP 65



i.SHA
THE ULTIMATE LIGHTING SOLUTION





冷库



户外



地下车库



食品车间



室内泳池

i.SHA
THE ULTIMATE LIGHTING SOLUTION

LED 三防线条灯
Line light series





工业照明



种植基地照明



冷库照明

i.SHA
THE ULTIMATE LIGHTING SOLUTION













应用场景





Line light series线条灯系列

Wattage	Size(mm)	Cut out(mm)	Material	IP Grade	Beam Angle	CRI	Luminous flux	Color	CCT
60W 60W 80W 90W	L1200*W54*H54 L1200*W59*H56 L1200*W85*H70 L1200*W95*H80	/	Die-casting aluminum	IP65	110°	≥90	100Lm/w	White	3000K 4000K 6000K

i.SHA
THE ULTIMATE LIGHTING SOLUTION



i.SHA
THE ULTIMATE LIGHTING SOLUTION







IS 2011 Outdoor wall washing 户外洗墙线条灯

Wattage	Size(mm)	Cut out(mm)	Material	IP Grade	Beam Angle	CRI	Luminous flux	Color	CCT
6W 9W 15W 21W	300*35*26MM 500*35*26MM 750*35*26MM 1000*35*26MM	/	Die-casting aluminum	IP65	30°	≥90	100Lm/w	White Black	3000K 4000K 6000K



民宿外墙氛围


门店招牌补光




门头招牌亮化





Outdoor wall washing
户外洗墙线条灯













i.SHA
THE ULTIMATE LIGHTING SOLUTION



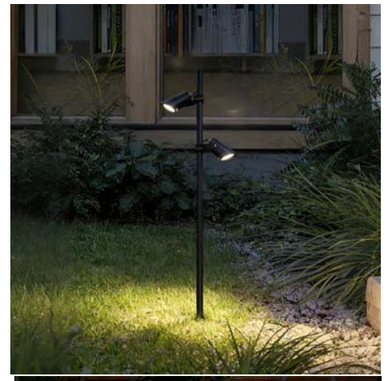



IP 65 355° 90°



基本参数/Parameters

产品型号/Model	AC 6001-DC24V-圆/Round
产品尺寸/Size (mm)	φ38*85H φ30*80H
功率/Power (W)	3W
光学配置/Holder	020/1304
防水等级/IP Level	IP 65
面环颜色/Color	■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 40° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 6001 DC24V-圆/Round
产品尺寸/Size (mm)	φ50*110H φ40*80H
功率/Power (W)	5W
光学配置/Holder	020/1304
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 40° 60°

产品尺寸图/Dimension (mm)





IP 65

355°

90°



基本参数/Parameters

产品型号/Model	AC 6002-DC24V-圆/Round
产品尺寸/Size (mm)	ϕ42*114H 160H
功率/Power (W)	3W
光学配置/Holder	020/1304
防水等级/IP Level	IP 65
面环颜色/Color	■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 45° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 6002 DC24V-圆/Round
产品尺寸/Size (mm)	ϕ50*127H 160H
功率/Power (W)	5W
光学配置/Holder	020/1304
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 45° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 6001-DC24V-圆/Round
产品尺寸/Size (mm)	ϕ62*127H 160H
功率/Power (W)	7W
光学配置/Holder	020/1304
防水等级/IP Level	IP 65
面环颜色/Color	■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 45° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 6002 DC24V-圆/Round
产品尺寸/Size (mm)	ϕ80*127H 160H
功率/Power (W)	10W
光学配置/Holder	020/1304
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 45° 60°

产品尺寸图/Dimension (mm)





i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 6007-AC220V-圆/Round
产品尺寸/Size (mm)	ϕ54*93　ϕ120*193 ϕ66*115　ϕ142*217 ϕ84*136　ϕ163*240 ϕ101*171　ϕ195*265
功率/Power (W)	6W/10W/18W/24W/36W/48W/60W/80W
光学配置/Holder	COB
防水等级/IP Level	IP 65
面环颜色/Color	铝+玻璃 Aluminum + Glass
光学角度/Beam Angle (°)	15°　30°　45°　60°

产品尺寸图/Dimension (mm)

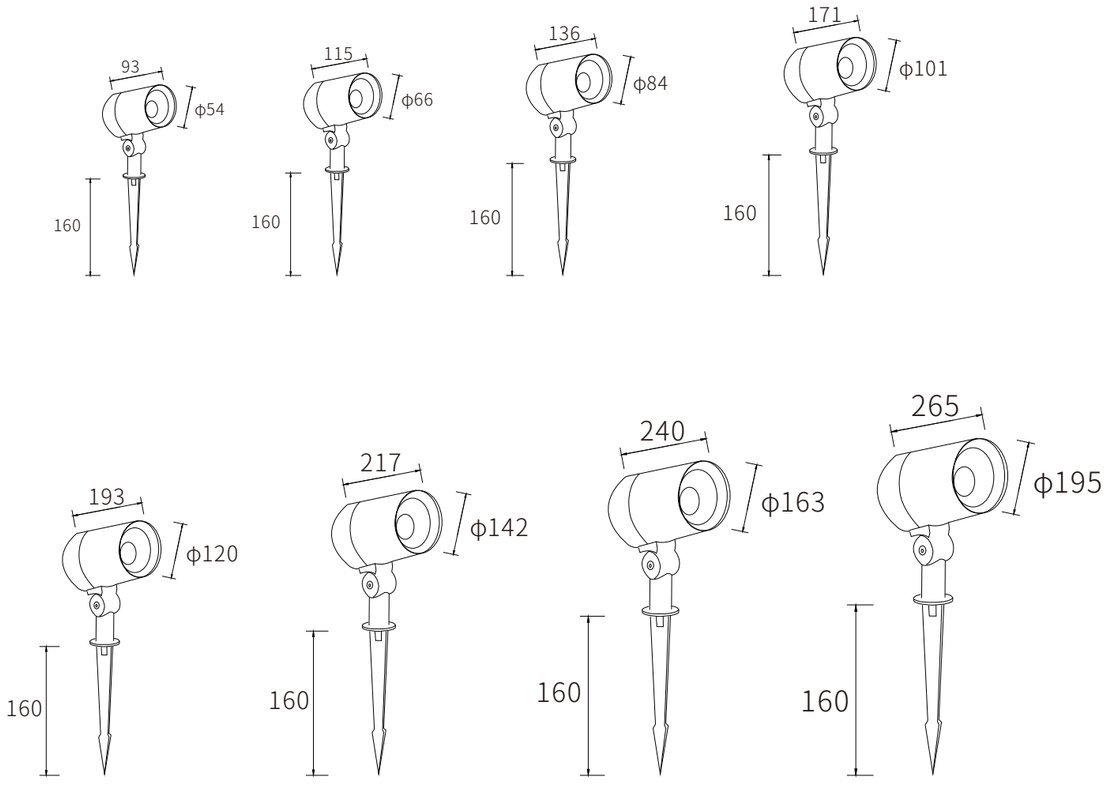

i.SHA
THE ULTIMATE LIGHTING SOLUTION



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 6008-AC220V-圆/Round	
产品尺寸/Size (mm)	ϕ60*75*65 ϕ100x110x150	ϕ80x105x110 ϕ125x130x180
产品尺寸/Size (mm)	ϕ60*75*160 ϕ100*110*310	ϕ80*100*290 ϕ125*120*380
功率/Power (W)	5W/10W/20W/30W	
光学配置/Holder	COB	
防水等级/IP Level	IP 65	
面环颜色/Color	铝+玻璃 Aluminum + Glass	
光学角度/Beam Angle (°)	15° 30° 45° 60°	

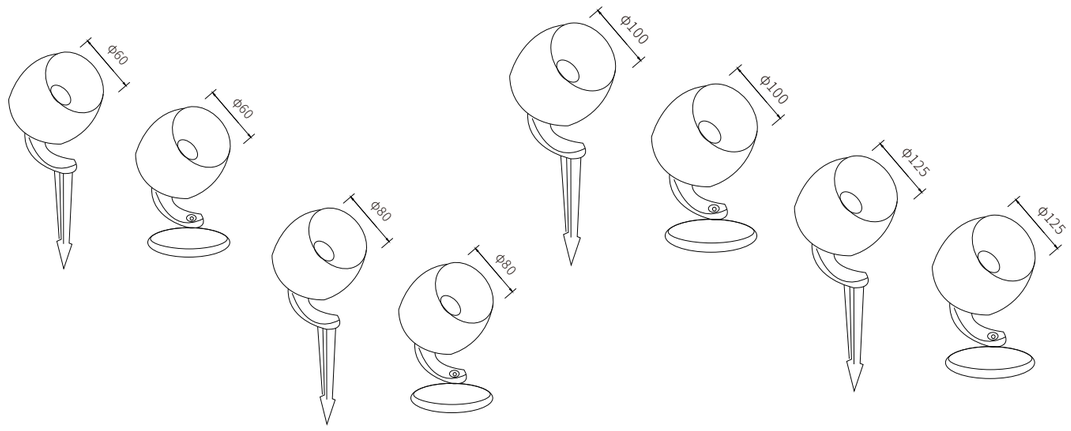





i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 6003-DC24V-圆/Round
产品尺寸/Size (mm)	ф25*49H
功率/Power (W)	1W
光学配置/Holder	XPE
防水等级/IP Level	IP 65
面环颜色/Color	不锈钢Stainless steel
光学角度/Beam Angle (°)	15° 30° 45° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 6003 DC24V-圆/Round
产品尺寸/Size (mm)	ф35*52H
功率/Power (W)	1W
光学配置/Holder	XPE
防水等级/IP Level	IP 65
面环颜色/Color	不锈钢Stainless steel
光学角度/Beam Angle (°)	15° 30° 45° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 6003 DC24V-圆/Round
产品尺寸/Size (mm)	ф45*56H
功率/Power (W)	3W
光学配置/Holder	SMD
防水等级/IP Level	IP 65
面环颜色/Color	不锈钢Stainless steel
光学角度/Beam Angle (°)	15° 30° 45° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 6003 DC24V-圆/Round
产品尺寸/Size (mm)	ф50*56H
功率/Power (W)	3W
光学配置/Holder	SMD
防水等级/IP Level	IP 65
面环颜色/Color	不锈钢Stainless steel
光学角度/Beam Angle (°)	15° 30° 45° 60°

产品尺寸图/Dimension (mm)





QR-D35-BY
半遮光
Semi-shielded



QR-D35-FX
蜂窝
H/C Louver



QR-D35-BF
半遮光+蜂窝
Semi-shielded+H/C Louver



QR-D35-GS
格栅
Grid Louver



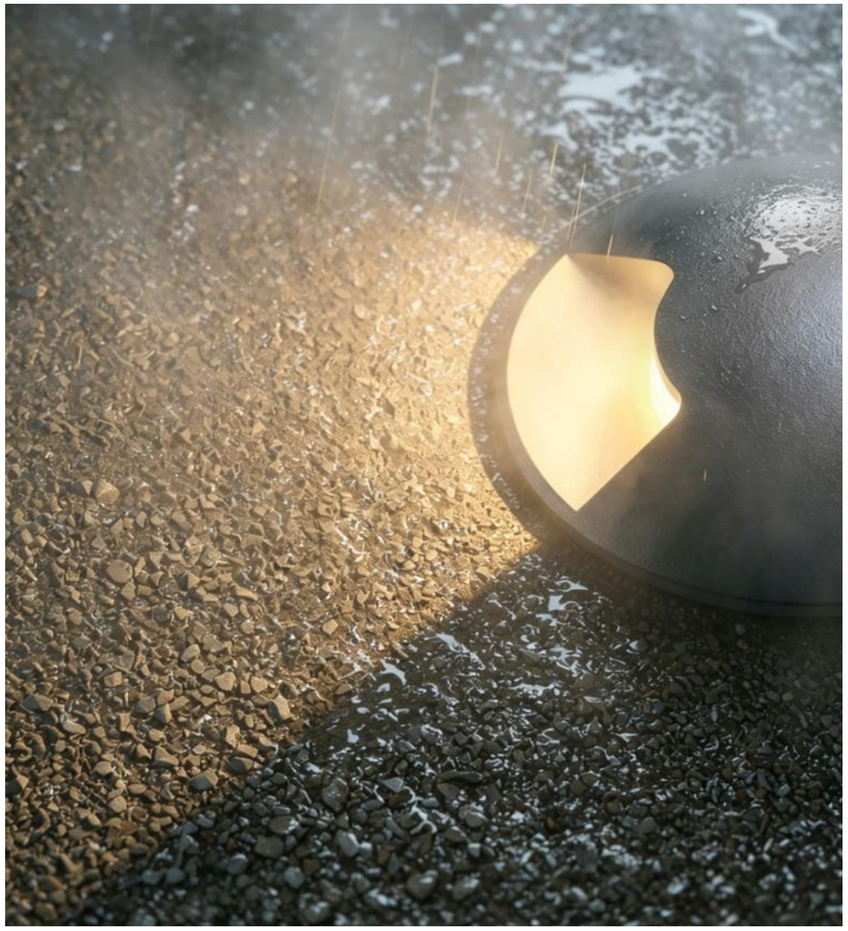



QR-D50-1TG
单向出光
1-Way



QR-D50-2TG
双向出光
2-Way



QR-D50-3TG
三向出光
3-Way



QR-D50-4TG
四向出光
4-Way



基本参数/Parameters

产品型号/Model	AC 6004-DC24V-圆/Round
产品尺寸/Size (mm)	ф50*52H
功率/Power (W)	3W
光学配置/Holder	SMD
防水等级/IP Level	IP 65
面环颜色/Color	不锈钢Stainless steel
光学角度/Beam Angle (°)	15° 30°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 6005-DC24V-圆/Round
产品尺寸/Size (mm)	ф48*72H
功率/Power (W)	3W
光学配置/Holder	COB
防水等级/IP Level	IP 65
面环颜色/Color	不锈钢Stainless steel
光学角度/Beam Angle (°)	15° 30° 45° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 6005 DC24V-圆/Round
产品尺寸/Size (mm)	ф55*100H
功率/Power (W)	5W
光学配置/Holder	COB
防水等级/IP Level	IP 65
面环颜色/Color	不锈钢Stainless steel
光学角度/Beam Angle (°)	15° 30° 45° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 6005 DC24V-圆/Round
产品尺寸/Size (mm)	ф80*98H
功率/Power (W)	9W
光学配置/Holder	COB
防水等级/IP Level	IP 65
面环颜色/Color	不锈钢Stainless steel
光学角度/Beam Angle (°)	15° 30° 45° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 6005 DC24V-圆/Round
产品尺寸/Size (mm)	ф100*118H
功率/Power (W)	15W
光学配置/Holder	COB
防水等级/IP Level	IP 65
面环颜色/Color	不锈钢Stainless steel
光学角度/Beam Angle (°)	15° 30° 45° 60°

产品尺寸图/Dimension (mm)





i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 6006-DC24V-圆/Round
产品尺寸/Size (mm)	ϕ52*H83
功率/Power (W)	2W
光学配置/Holder	SMD
防水等级/IP Level	IP 65
面环颜色/Color	不锈钢Stainless steel
光学角度/Beam Angle (°)	15° 30° 45° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 6006 DC24V-圆/Round
产品尺寸/Size (mm)	ϕ100*H90
功率/Power (W)	3W
光学配置/Holder	SMD
防水等级/IP Level	IP 65
面环颜色/Color	不锈钢Stainless steel
光学角度/Beam Angle (°)	15° 30° 45° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 6006 DC24V-圆/Round
产品尺寸/Size (mm)	ϕ120*H90
功率/Power (W)	6W
光学配置/Holder	COB
防水等级/IP Level	IP 65
面环颜色/Color	不锈钢Stainless steel
光学角度/Beam Angle (°)	15° 30° 45° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 6006 DC24V-圆/Round
产品尺寸/Size (mm)	ϕ160*H90
功率/Power (W)	9W
光学配置/Holder	SMD
防水等级/IP Level	IP 65
面环颜色/Color	不锈钢Stainless steel
光学角度/Beam Angle (°)	15° 30° 45° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 6006 DC24V-圆/Round
产品尺寸/Size (mm)	ϕ200*70H
功率/Power (W)	18W
光学配置/Holder	SMD
防水等级/IP Level	IP 65
面环颜色/Color	不锈钢Stainless steel
光学角度/Beam Angle (°)	15° 30° 45° 60°

产品尺寸图/Dimension (mm)



Lighting Design Customizes Art

灯光设计定制艺术

Thank you

感谢您的查阅