www.ishalighting.com

Customized

i.SHA

THE ULTIMATE LIGHTING SOLUTION

中山市依莎照明科技有限公司

ZHONGSHAN i.SHA LIGHTING TECHNOLOGY CO.,LIMITED

广东省中山市古镇镇曹三工业园同兴二路8号

Factory:NO.8 Tongxing Second Road, Caosan Industrial Park, Guzhen Town, Zhongshan City, Guangdong Province, China.

广东省中山市古镇镇中兴大道68号星光联盟9楼C区12卡

Exclusive Shop: Room 12, 9th Floor,Area C, Star Alliance, 68 Zhongxing Avenue, Guzhen Town, Zhongshan City, Guangdong Province

2026依莎系列产品目录

2026 CATALOGUE OF i.SHA SERIES

YOUR

EXCLUSIVE LIGHTING

DESIGNER

依莎，定制懂你的光

i.SHA

THE ULTIMATE LIGHTING SOLUTION

2026依莎系列产品目录

2026 CATALOGUE OF i.SHA SERIES

i.SHA
THE ULTIMATE LIGHTING SOLUTION

Your Exclusive
Lighting Designer

依莎·定制懂你的光



Light ensouls the building
Shadow creates space and atmosphere
i.SHA is born for the arts
We are specialized in lights, so that we can create light that most suited for you
i.SHA aims to customize masterpieces for you

Lighting
Design Customizes Arts

灯光设计定制艺术

i.SHA
THE ULTIMATE LIGHTING SOLUTION



BRAND IDEA

品牌理念

灯具不只是灯具
更是灯光艺术
灯光，赋予建筑灵魂
光影，营造空间氛围
光与空间
光与自然
光与情感
光与健康
光与生活
皆密不可分
——光，是感知空间的媒介

而如何对光进行精准控制
以极简的美学设计诠释光的艺术
便是依莎 灯光设计师们孜孜不倦的追求…

Lamps are not only lamps
But the arts of light
Light ensouls the building
Shadow creates space and atmosphere
Light and space
Light and nature
Light and emotion
Light and health
Light and life
They are all inextricably linked
——Light is a medium for perceiving space

How to precisely control the light
and interpret the art of light with minimalist aesthetic design
is tireless pursuitof i.SHA's light designers···

i.SHA
THE ULTIMATE LIGHTING SOLUTION

i.SHA
THE ULTIMATE LIGHTING SOLUTION

BRAND STORY

品牌故事

品牌溯源——源于光的美好馈赠

光，乃万物之源，是大自然赐予人类最美好的礼物。
世界著名建筑师贝聿铭曾说“让光线来做设计”，
伟大的建筑师路易斯康也认为“光是一个空间的神奇创造者”。

i.SHA依莎秉承最纯粹的初心，
以象征光明的i.SHA依莎灯光艺术，赋予建筑空间以灵魂。

Light is the source of all things, and it is the nature's best gift to human beings.
The world-renowned architect Ieoh Ming Pei once said"Let the light to guide the design",
The great architect Louis Kahn also believed"Light is the magical creator of a space".

i.SHAadheres with its purest original intention
Use thei.SHAarts of light that symbilizes lighting to ensoulls the building.

品牌创建——国际顶尖设计师工作室

2008年，i.SHA依莎创始人与国内外多位顶尖的室内设计师，创建
“i.SHA依莎灯光设计定制工作室”，服务案例遍及欧洲、东南亚、南
美洲等世界各地，精准的控光技术和丰富的灯光灯光定制系统解决方案
经验，让i.SHA依莎成为顾客心中灯光艺术的最佳倾听者与设计者。

i.SHA依莎，为顶尖设计顶尖，为杰作定制杰作。
因为懂光，所以定制懂你的光。

In 2008, the founder of i.SHA and many top interior designers at home and abroad
together created "i.SHA Lighting Design and Customization Studio". With its service cases
in Europe, Southeast Asia, South America and other parts of the world,i.SHA has precise
light control technology and rich experience in lighting and lighting customized system
solutions, which makes i.SHA the best listener and designer of lighting arts in customers'
minds.

i.SHA aims to customize masterpieces for you with our top design
We are specialized in lights, so that we can create light that most suited for you

品牌价值——为空间赋予艺术生命力

建筑是凝固的音乐，而照明则是流动的天际线。
对于依莎来说，光不仅是建筑和空间价值的核心，光与空间，光与自然，光与
情感，光与健康，光与生活，皆密不可分。
光，是感知空间的媒介，更能改善生活，实现社会创新发展。

2020年，i.SHA依莎开启品牌战略升级，全面进军国内市场。
i.SHA依莎，以极简的美学设计诠释光的艺术，将不遗余力打造成为灯光定制
系统解决方案专家，从而实现“铸就百年依莎，缔造光影艺术价值”的宏伟品
牌愿景。

Architecture is the frozen music, while lighting is a floating skyline.
For i.SHA, light is not just the core of the building and space value. Light and space, light and
nature, light and emotion, light and health, light and life are all inextricably linked.
Light is a medium for perceiving space, which can improve life and realize social innovation
and development.

In 2020, i.SHA starts its the brand strategy upgrade, fully entering the domestic market.
i.SHA interprets the arts of light with minimalist aesthetic design, sparing no effort to become
an expert in lighting customization system solutions, thereby realizing the grand brand vision
of "making i.Sha a time-tested brand and creating the value of light and shadow art".



Lighting design customization studio

灯 光 设 计 定 制 工 作 室

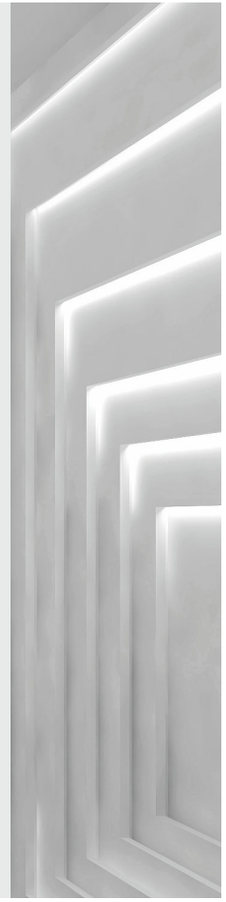


i.SHA
THE ULTIMATE LIGHTING SOLUTION
YOUR
EXCLUSIVE LIGHTING
DESIGNER
依莎，定制懂你的光
核心价值主张释义：
灯光，赋予建筑灵魂
光影，感知空间氛围
依莎，为艺术之光而生
因为懂光，所以定制更懂你的光
依莎，为杰作定制杰作
Interpretation of the core value:
Light ensouls the building
Shadow creates space and atmosphere
i.SHA is born for the arts
We are specialized in lights, so that we can create light that most suited for you
i.SHA aims to customize masterpieces for you
Lighting
Design Customizes Art
灯光设计定制艺术
i.SHA
Your Exclusive Lighting Designer

i.SHA
THE ULTIMATE LIGHTING SOLUTION

BRAND
Company profile

i.SHA依莎简介

中山市依莎照明科技有限公司成立于2008年，坐落于“中国灯饰之都”中山古镇，是一家集商业照明产品研发、设计、生产 、销售、服务于一体的高新科技企业。公司拥有成熟的生产供应链体系，完善的检测设备，数十台车床和压铸机，以及资深的光学工程师、电学工程师等专业技术人才。i.SHA依莎照明产品线涵盖商业照明和家居照明领域，全方位满足各类空间灯光应用解决方案的需求。

Zhongshan i.SHA Lighting Industrial Co., Led was established in 2008, which is located in the ancient town of Zhongshan that is known as the "Capital of Decorative Lighting in China". It is a high-tech enterprise which integrates research and development, design, production, sales and service of commercial lighting products. The company has a mature production and supply chain system, complete testing equipment, dozens of lathes and die-casting machines, as well as senior optical engineers, electrical engineers and other professional and technical personnel. The i.SHA lighting product line covers the areas of commercial lighting and home lighting, which can fully meet the needs of various space lighting as your application solutions.



BRAND Culture

品牌文化

品牌广告语 依莎 · 定制懂你的光
品 牌 定 位 灯光设计定制艺术
品 牌 使 命 成为灯光定制系统 解决方案专家
品 牌 愿 景 铸就百年依莎 缔造光影艺术价值



THE CASE OF i.SHA

i.SHA依莎照明应用场景

- 私人别墅 PRIVATE VILLA
- 家居照明 HOME LIGHTING
- 办公场所 WORKPLACES
- 艺术空间 ART SPACES
- 品牌商店 BRAND STORES
- 酒店会所 HOTELS AND CLUBS
- 购物中心 SHOPPING CENTERS
- 餐厅酒吧 RESTAURANTS AND BARS

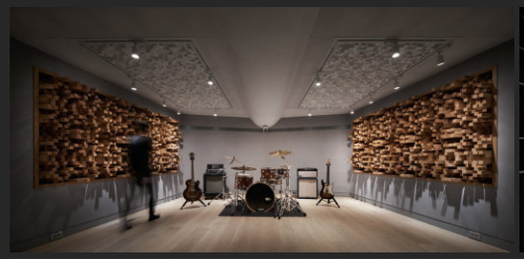

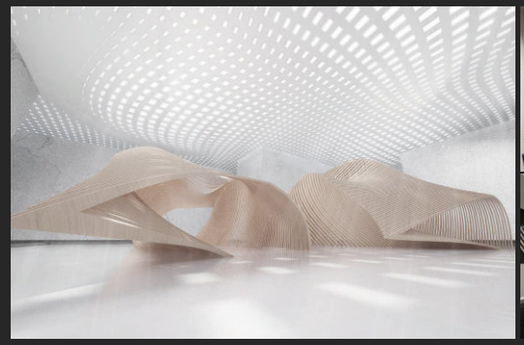




Your Exclusive Lighting Designer

i.SHA
THE ULTIMATE LIGHTING SOLUTION

level

依莎照明技术，具备专业成熟的生产技术和设计研发制造能力，严格把控设计和生产品质，提供国际品质的高端商照产品。

在“亮度与对比度、空间距离舒适度、照度均匀性与稳定度”上，达到“设计大师的照明定制标准“，为空间赋予视觉极度舒适的空间体验感和艺术感。

With professional and mature production technology and design R&D and manufacturing capabilities,iSHA lighting technology can strictly control the design and production quality, providing high-end commercial lighting products of international quality.

In terms of "brightness and contrast, space distance comfort, and illuminance uniformity and stability", iSHA has reached the "lighting customization standard of a design master", endowing the space with an extremely comfortable spatial experience and artistic sense.

master



设计大师级别的定制标准

Design master-level customization standards


i.SHA
THE ULTIMATE LIGHTING SOLUTION
i.SHA
THE ULTIMATE LIGHTING SOLUTION

i.SHA
THE ULTIMATE LIGHTING SOLUTION



KX 3168依晨系列
SPOTLIGHT

高流明 | 深防眩 | 高功率

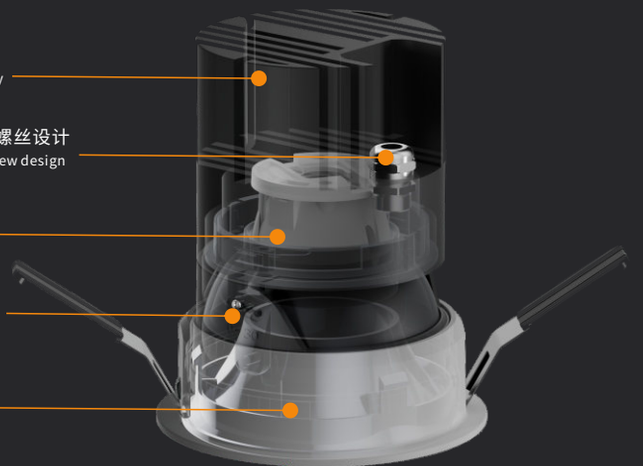

ADC12铸铝一体化灯体
ADC12 cast aluminum integrated lamp body

IP 44 防水螺丝设计
IP 44 waterproof screw design

高透光率柔光透镜
High transmittance soft light lens

高透光率柔光透镜
High transmittance soft light lens

防眩罩
Anti-glare mask

i.SHA
THE ULTIMATE LIGHTING SOLUTION



0°-30°三档定位珠设计
确保光斑位置一致性
The three-position positioning bead design from 0° to 30° ensures the consistency of the light spot position



基本参数/Parameters

产品型号/Model	KX 3168 55-圆/Round
产品尺寸/Size (mm)	ϕ63*80H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	5-9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	KX 3168 55-圆/Round
产品尺寸/Size (mm)	ϕ63*109H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	8-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55



i.SHA
THE ULTIMATE LIGHTING SOLUTION





KX 3168依晨系列
SPOTLIGHT

高流明 | 深防眩 | 高功率

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	φ82*78H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	8-10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ75





基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	φ82*95H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	12-15W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ75





基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	φ82*127H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	15-20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ75





基本参数/Parameters

产品型号/Model	KX 3168 95-圆/Round
产品尺寸/Size (mm)	φ103*130H
开孔尺寸/Cutout (mm)	φ95
功率/Power (W)	20-30W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ95







基本参数/Parameters

产品型号/Model	KX 3168 75-方/Square
产品尺寸/Size (mm)	82*82*78H
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	8-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX 3168 75-方/Square
产品尺寸/Size (mm)	82*82*95H
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	12-15W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX 3168 55-方/Square
产品尺寸/Size (mm)	63*63*80H
开孔尺寸/Cutout (mm)	55*55
功率/Power (W)	5-8W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX 3168 55-方/Square
产品尺寸/Size (mm)	63*63*110H
开孔尺寸/Cutout (mm)	55*55
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)



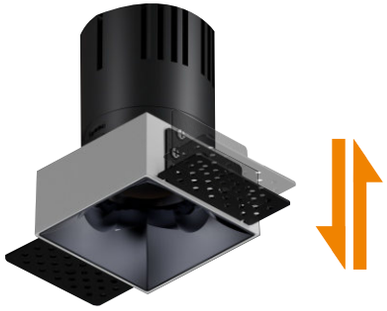

无边框翅膀可调节高度
不挑石膏板厚度
The frameless wings can be adjusted in height and are not restricted by the thickness of the gypsum board



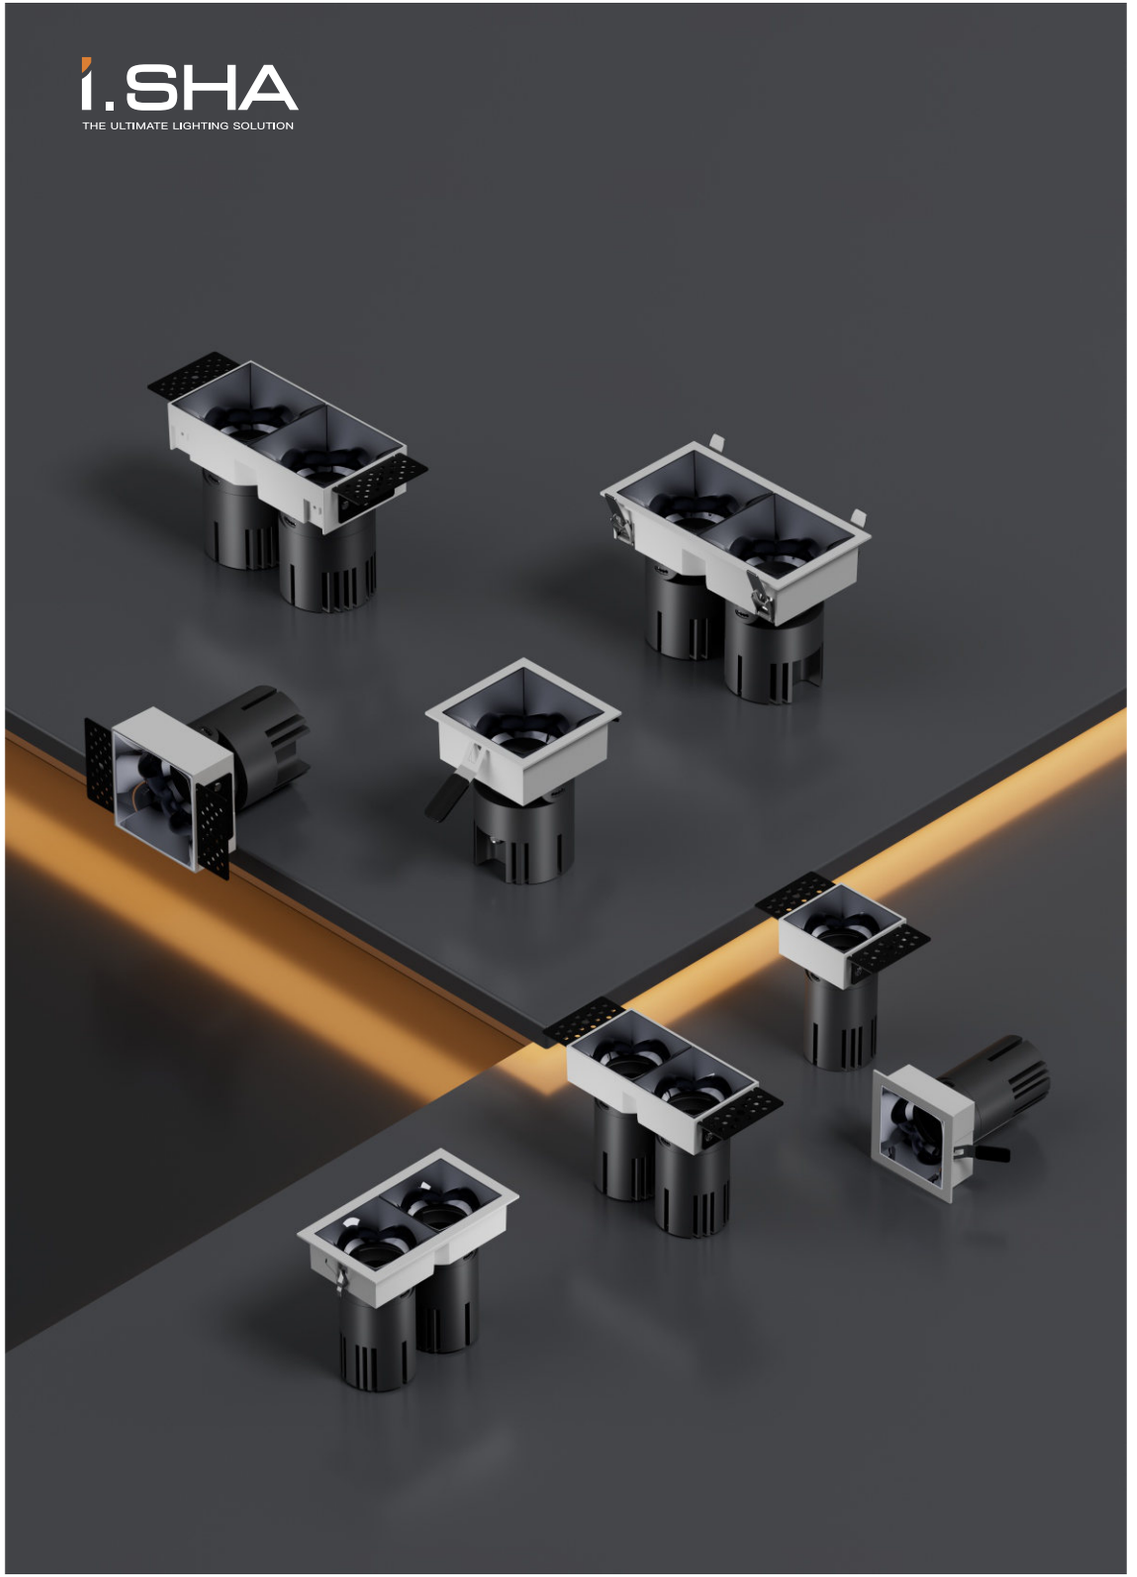

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3168 75-方/Square
产品尺寸/Size (mm)	82*82*127H
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	18-25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
75*75





基本参数/Parameters

产品型号/Model	KX 3168 95-方/Square
产品尺寸/Size (mm)	103*103*110H
开孔尺寸/Cutout (mm)	95*95
功率/Power (W)	20-25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
95*95





基本参数/Parameters

产品型号/Model	KX 3168 55-方 双头/Square
产品尺寸/Size (mm)	63*114*85H
开孔尺寸/Cutout (mm)	55*105
功率/Power (W)	8-12W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
55*105





基本参数/Parameters

产品型号/Model	KX 3168 55-方 双头/Square
产品尺寸/Size (mm)	63*114*115H
开孔尺寸/Cutout (mm)	55*105
功率/Power (W)	12-15W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
55*105



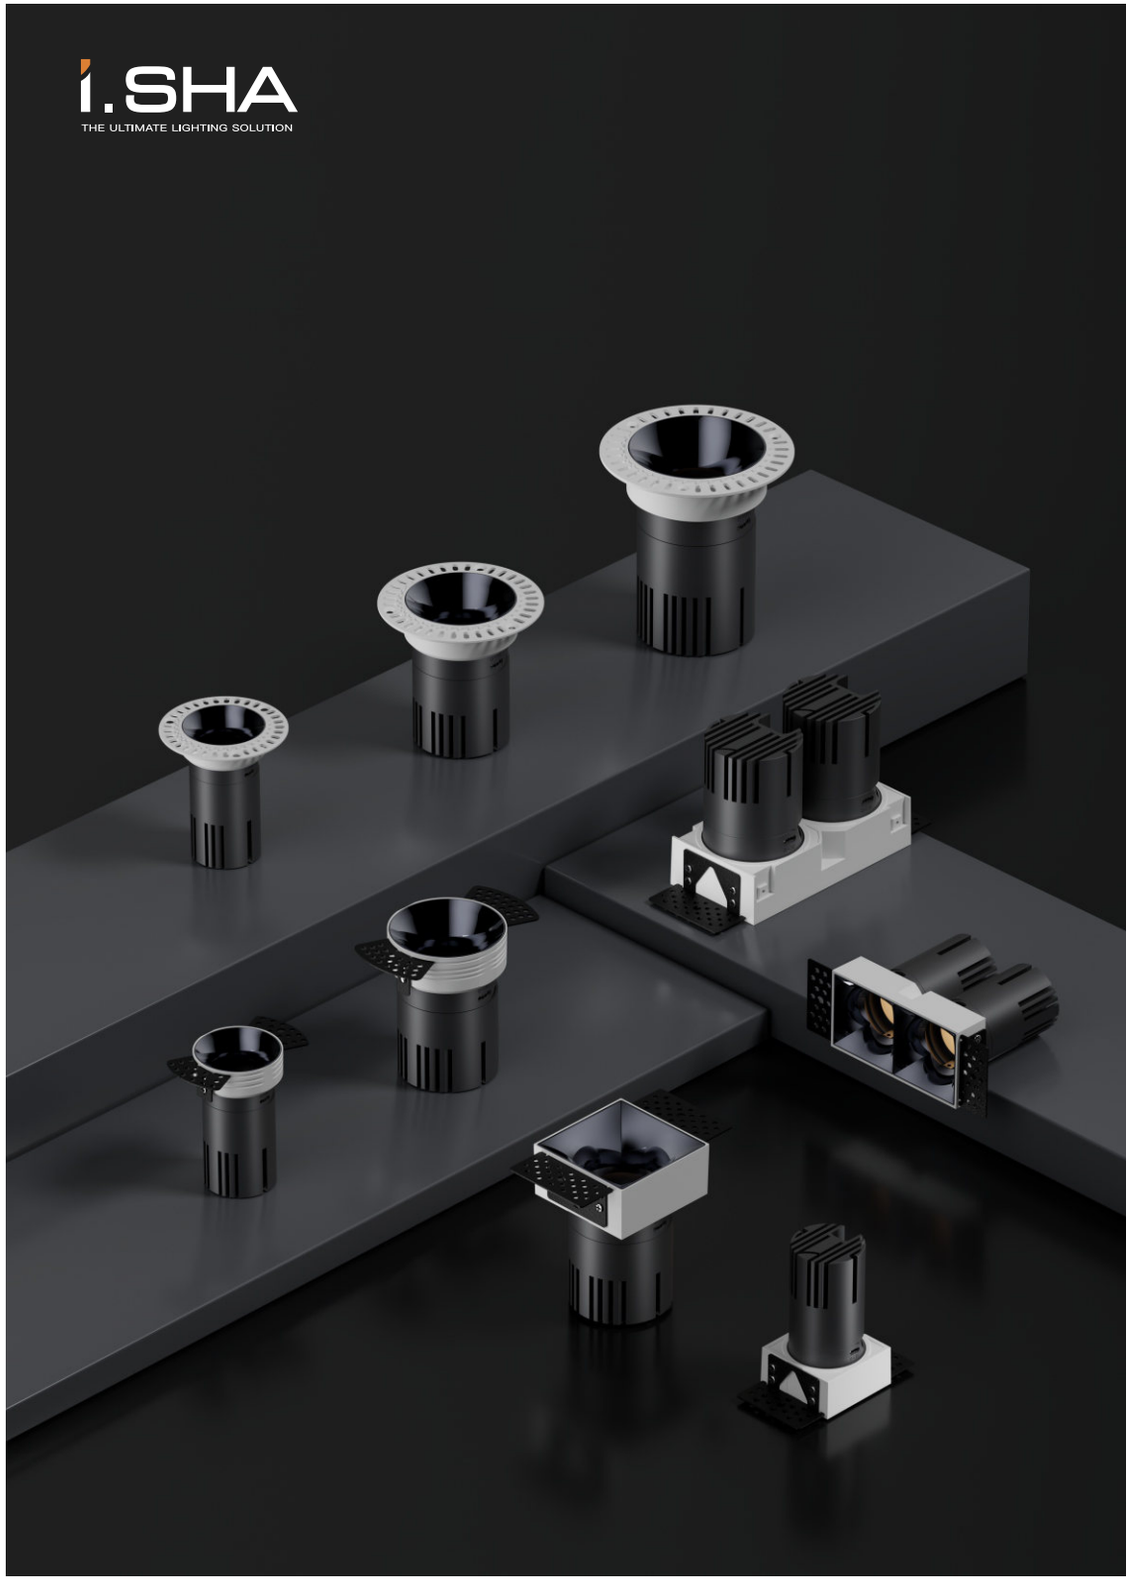

i.SHA
THE ULTIMATE LIGHTING SOLUTION

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3168 75-方 双头/Square
产品尺寸/Size (mm)	84*155*86H
开孔尺寸/Cutout (mm)	75*125
功率/Power (W)	8-10W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	砂白/Matte White 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX 3168 75-方 双头/Square
产品尺寸/Size (mm)	84*155*105H
开孔尺寸/Cutout (mm)	75*125
功率/Power (W)	12-15W*2
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	砂白/Matte White 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

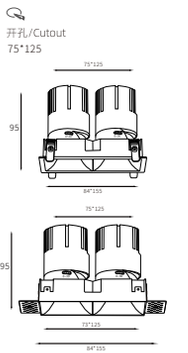



基本参数/Parameters

产品型号/Model	KX 3168 75-方 双头/Square
产品尺寸/Size (mm)	84*155*135H
开孔尺寸/Cutout (mm)	75*125
功率/Power (W)	8-12W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	砂白/Matte White 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

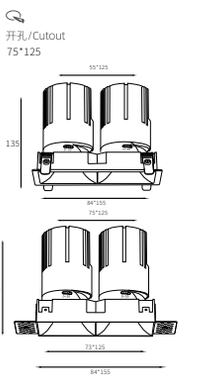

i.SHA
THE ULTIMATE LIGHTING SOLUTION



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	ϕ82*80H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	ϕ82*96H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	12-15W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	ϕ82*80H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	ϕ82*76H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	12-15W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75



i.SHA
THE ULTIMATE LIGHTING SOLUTION





KX 3168依晨系列
SPOTLIGHT
隐形无边 | 非预埋款射灯



基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	φ82*80H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ75





基本参数/Parameters

产品型号/Model	KX 3168 75-圆/Round
产品尺寸/Size (mm)	φ82*80H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ75







60° 大遮光角
有效过滤眩光，深度防炫目

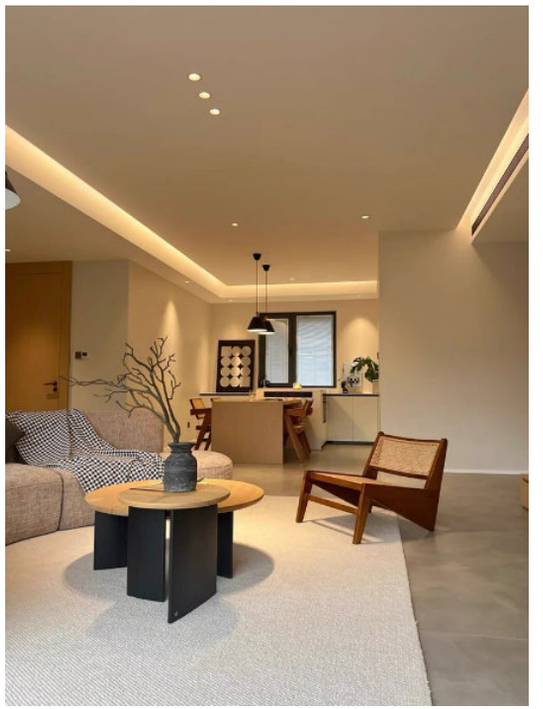



无边安装后展示

i.SHA
THE ULTIMATE LIGHTING SOLUTION



KX 3062依星系列
SPOTLIGHT

高流明 | 深防眩 | 多模组





i.SHA
THE ULTIMATE LIGHTING SOLUTION



Adjustment of the
Positioning point
调整卡扣，10-36°夹角



Adjustable
Irradiation Angle
灯具360°旋转调节

i.SHA
THE ULTIMATE LIGHTING SOLUTION

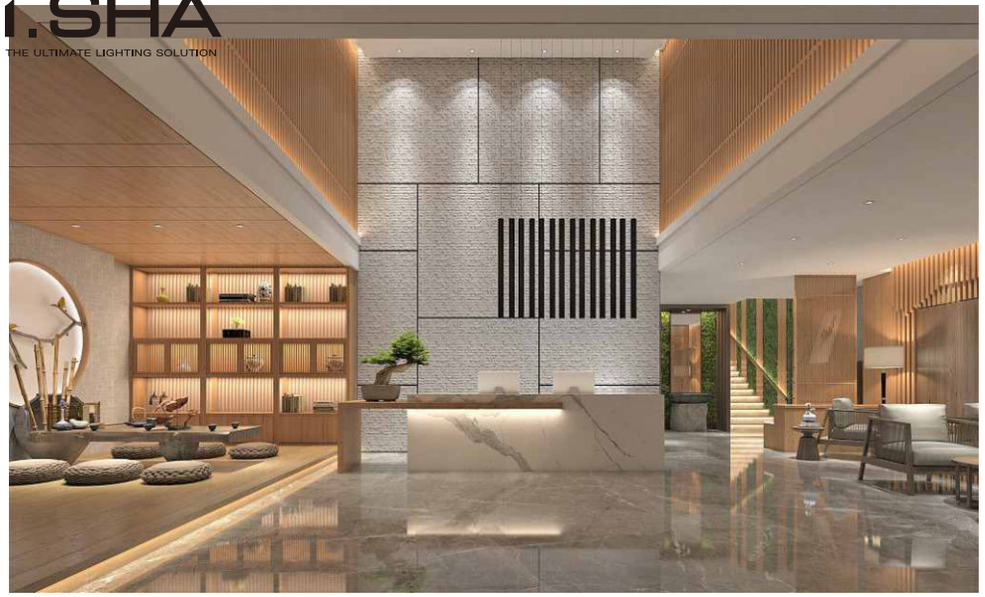

产品分解实物图
Product Breakdown Diagram

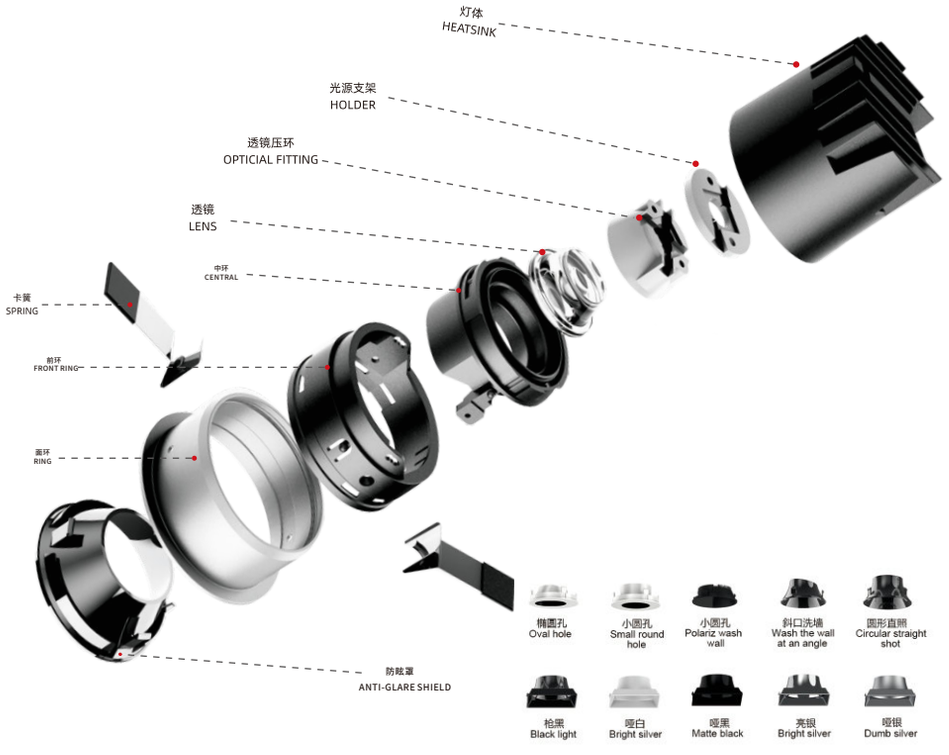

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3062 55-圆/Round
产品尺寸/Size (mm)	ϕ62*82H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	KX 3062 75-圆/Round
产品尺寸/Size (mm)	ϕ82*95H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	KX 3062 95-圆/Round
产品尺寸/Size (mm)	ϕ108*118H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	15-20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95





基本参数/Parameters

产品型号/Model	KX 3062 120-150-圆/Round
产品尺寸/Size (mm)	ϕ135*142H ϕ165*152H
开孔尺寸/Cutout (mm)	ϕ120-150
功率/Power (W)	30-40W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ120 ϕ150



i.SHA
THE ULTIMATE LIGHTING SOLUTION









Versatile form,
flexible replacemen



FIXED



ADJUSTABLE

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3062 55-方/Square
产品尺寸/Size (mm)	62*62*82H
开孔尺寸/Cutout (mm)	55*55
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	砂白/Matte White 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
55*55





基本参数/Parameters

产品型号/Model	KX 3062 75-方/Square
产品尺寸/Size (mm)	85*82*95H
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	砂白/Matte White 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
75*75





基本参数/Parameters

产品型号/Model	KX 3062 150*75-方/Square
产品尺寸/Size (mm)	157*82*118H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	砂白/Matte White 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
150*75





基本参数/Parameters

产品型号/Model	KX 3062 225*75-方/Square
产品尺寸/Size (mm)	230*84*95
开孔尺寸/Cutout (mm)	ϕ120-150
功率/Power (W)	10W*3
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	砂白/Matte White 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
275*75



i.SHA
THE ULTIMATE LIGHTING SOLUTION



KX 3131落瑾系列
SPOTLIGHT

高流明 | 深防眩 | 高功率

i.SHA
THE ULTIMATE LIGHTING SOLUTION

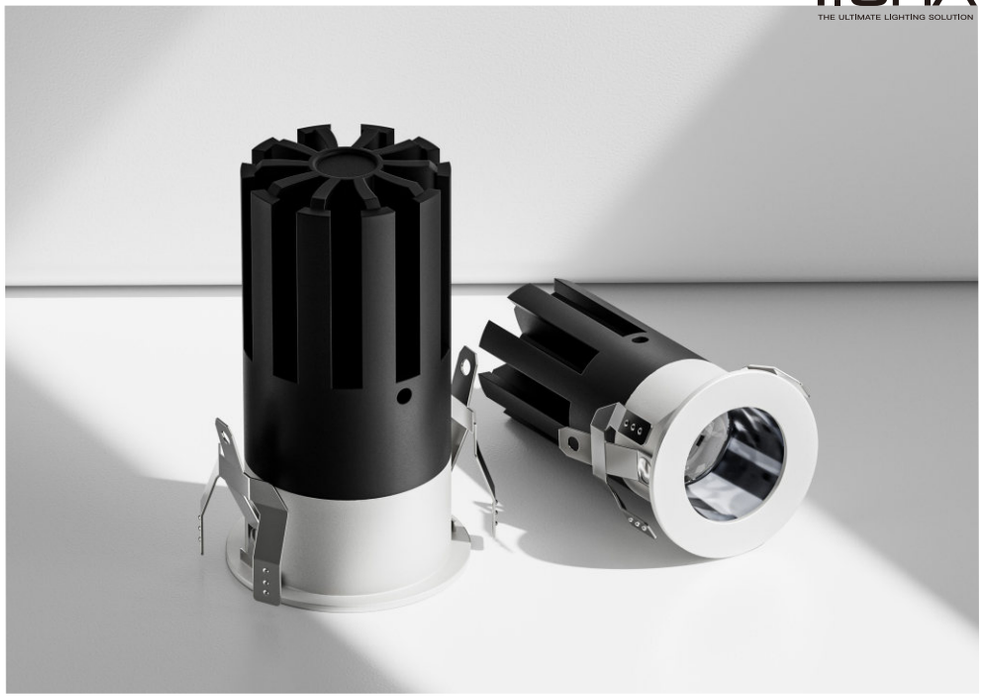



基本参数/Parameters

产品型号/Model	KX 3131 35-圆/Round
产品尺寸/Size (mm)	ϕ40*76.5H
开孔尺寸/Cutout (mm)	ϕ35
功率/Power (W)	7W
光学配置/Holder	1304
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX 3131 45-圆/Round
产品尺寸/Size (mm)	ϕ50*88.5H
开孔尺寸/Cutout (mm)	ϕ45
功率/Power (W)	10W
光学配置/Holder	1304
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION



产品分解实物图
Product Breakdown Diagram

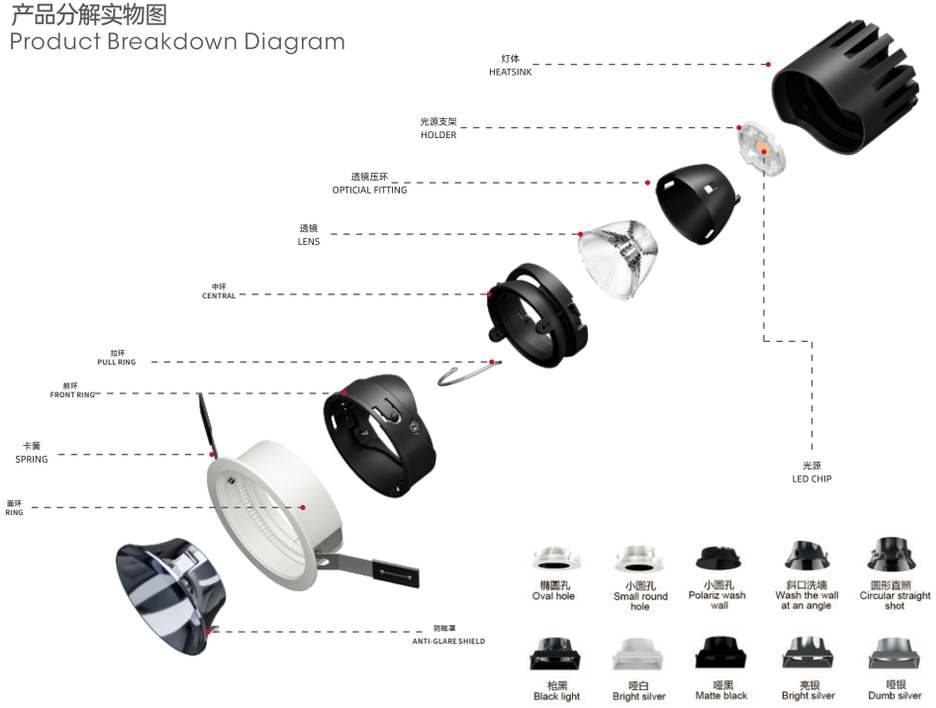

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3131 55-圆/Round
产品尺寸/Size (mm)	ϕ62*106.5H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	8-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	KX 3131 75-圆/Round
产品尺寸/Size (mm)	ϕ82*88H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	KX 3131 75-圆/Round
产品尺寸/Size (mm)	ϕ82*115H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	15-20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	KX 3131 95-圆/Round
产品尺寸/Size (mm)	ϕ105*146H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	20-30W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95



i.SHA
THE ULTIMATE LIGHTING SOLUTION

KX 3131落瑾系列
SPOTLIGHT
高流明 | 深防眩 | 高功率

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3131 55-方/Square
产品尺寸/Size (mm)	62*62*106.5H
开孔尺寸/Cutout (mm)	55*55
功率/Power (W)	8-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
55*55





基本参数/Parameters

产品型号/Model	KX 3131 110*55-方/Square
产品尺寸/Size (mm)	62*115.5*106.5H
开孔尺寸/Cutout (mm)	110*55
功率/Power (W)	10-12W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
110*55





基本参数/Parameters

产品型号/Model	KX 3131 75-方/Square
产品尺寸/Size (mm)	82*82*88H
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
75*75





基本参数/Parameters

产品型号/Model	KX 3131 150*75-方/Square
产品尺寸/Size (mm)	158*82*88H
开孔尺寸/Cutout (mm)	150*75
功率/Power (W)	10-12W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
150*75



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3131 75-方/Square
产品尺寸/Size (mm)	82*82*115H
开孔尺寸/Cutout (mm)	75*75
功率/Power (W)	15-20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
75*75





基本参数/Parameters

产品型号/Model	KX 3131 150*75-方/Square
产品尺寸/Size (mm)	82*158*115H
开孔尺寸/Cutout (mm)	150*75
功率/Power (W)	15-20W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
150*75





基本参数/Parameters

产品型号/Model	KX 3131 95-方/Square
产品尺寸/Size (mm)	102.5*102.5*146H
开孔尺寸/Cutout (mm)	95*95
功率/Power (W)	20-30W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
95*95





基本参数/Parameters

产品型号/Model	KX 3131 190*95-方/Square
产品尺寸/Size (mm)	197*5*102.5*146H
开孔尺寸/Cutout (mm)	190*95
功率/Power (W)	20-30W*2
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
190*95



i.SHA
THE ULTIMATE LIGHTING SOLUTION



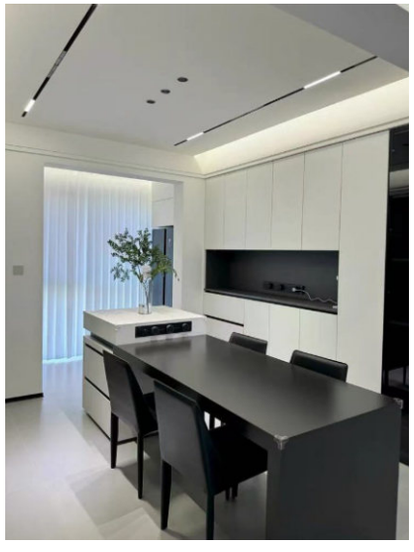

安装效果图

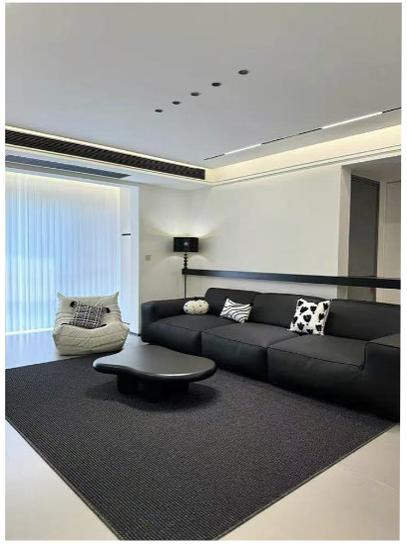



AC 9292 依萌模组系列
SPOTLIGHT

圆窄边/Round Narrow Edge
圆宽边/Round Wide Edge
圆无边/Round Boundless
圆飞机翼无边/ Round Aircraft Wing Circle Without Edges

IP65防水模组/IP65 Waterproof Module



55防水模组
55 Waterproof Module

65防水模组
65 Waterproof Module

75防水模组
75 Waterproof Module

95防水模组
95 Waterproof Module

30°可调中环/30° Adjustable Front Ring



压铸铝/
Aluminium

PC

内设调节刻度/
Internally adjustable scale

面环款式/Face Ring Style



窄边弹夹款
Narrow Edge FMagazine style

宽边弹夹款
Wide Ring Magazine style

沉台款无边框
Sink style without borders



窄边弹片款
Narrow Edge Shrapnel style

宽边弹片款
Wide Ring Shrapnel style

飞机翼圆无边
Aircraft wing circle without edges

可选防眩反光杯/Anti-glare Cup Color Options

PC款防眩杯/
PC Anti Glare Cup



枪黑
Gun Black

亮银
Bright Sliver

亚黑
Matte Black

亚白
Matte White

金色
Golden

铝合金款直面防眩杯/
Aluminum Alloy Straight Anti Glare Cup



枪黑
Gun Black

亮银
Bright Sliver

亚黑
Matte Black

亚白
Matte White

金色
Golden

铝合金款弧面防眩杯/
Aluminum Alloy Curved Anti Glare Cup



枪黑
Gun Black

亮银
Bright Sliver

亚黑
Matte Black

亚白
Matte White

金色
Golden

i.SHA
THE ULTIMATE LIGHTING SOLUTION



AC 9292 依萌系列
SPOTLIGHT

圆窄边/Round Narrow Edge
圆宽边/Round Wide Edge
圆无边/Round Boundless
圆飞机翼无边/ Round Aircraft Wing Circle Without Edges

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters	
产品型号/Model	AC 9292 55-圆/Round
产品尺寸/Size (mm)	ϕ62*85H ϕ75*85H L92.5*85H ϕ80*85H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	6-9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters	
产品型号/Model	AC 9292 65-圆/Round
产品尺寸/Size (mm)	ϕ72*89H ϕ85*89H L108*89H ϕ90*89H
开孔尺寸/Cutout (mm)	ϕ65
功率/Power (W)	7-10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters	
产品型号/Model	AC 9292 75-圆/Round
产品尺寸/Size (mm)	ϕ82*98H ϕ95*98H L120*98H ϕ100*98H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters	
产品型号/Model	AC 9292 95-圆/Round
产品尺寸/Size (mm)	ϕ108*123H ϕ120*123H L160*123H ϕ120*123H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	20-25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION

i.SHA
THE ULTIMATE LIGHTING SOLUTION

POLARIZED WALL WASH LAMP

偏光洗墙灯系列

AC 9293 光辉系列





面环款式
FACE RING STYLE


窄边弹夹款
Narrow Edge FMagazine style


窄边弹片款
Narrow Edge Shrapnel style


宽边弹夹款
Wide Ring Magazine style


宽边弹片款
Wide Ring Shrapnel style


沉台款无边框
Sink style without borders


飞机翼圆无边
Aircraft wing circle without edges


Ø55mm


Ø75mm


Ø95mm

POLARIZED WALL WASH LAMP

偏光洗墙灯系列

AC 9293 光辉系列

多样规格Diverse sizes：

天花开孔：55/75/95mm
Ceiling openings cover 55/75/95mm



产品优势
PRODUCT ADVANTAGES

低眩光高光效：
Low glare and high luminous efficiency:

特殊设计自由曲面反光杯加防眩罩，精准光路主动防眩，出光效率高
Specially designed free-form curved surface reflector cup with anti-glare cover, precise light path active anti-glare, high light output efficiency

超强混旋旋光性能：
Super strong mixing and optical rotation performance:

独特微鳞甲格纹，单色和双色温混光均匀
Unique micro-scale armor checkered pattern ensures uniform mixing of both single-color and dual-color temperatures

无暗区洗墙光斑：
No dark area wall cleaning light spot:

洗墙起始光斑与天花板顶端切齐，全广角无暗区
The starting light spot for wall cleaning is aligned with the top of the ceiling

多盏拼接洗墙佳：
Multi-lamp spliced wall cleaning excellent:

可无缝拼接洗墙，光斑均匀过渡，无亮暗条纹
It can be seamlessly spliced for wall cleaning,with uniform light spot transition and no bright or dark stripes

材料更优：
Superior materials:

高耐温材料，反光杯最高耐温140°C
High-temperature resistant materials, the reflector cup can withstand a maximum temperature of 140°C

i.SHA
THE ULTIMATE LIGHTING SOLUTION



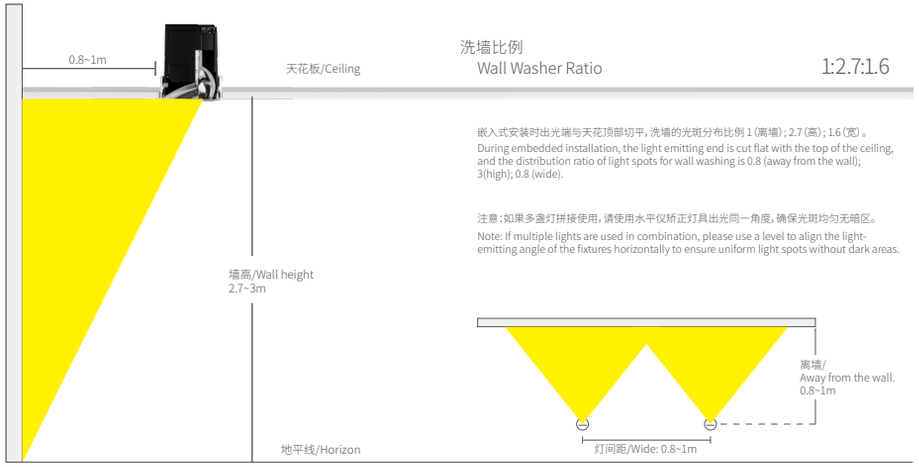

洗墙比例
Wall Washer Ratio
1:2.7:1.6

嵌入式安装时出光端与天花顶部切平，洗墙的光斑分布比例 1（离墙）: 2.7（高）: 1.6（宽）。
During embedded installation, the light emitting end is cut flat with the top of the ceiling, and the distribution ratio of light spots for wall washing is 0.8 (away from the wall); 3(high); 0.8 (wide).

注意：如果多盏灯拼接使用，请使用水平仪矫正灯具出光同一角度，确保光斑均匀无暗区。
Note: If multiple lights are used in combination, please use a level to align the light-emitting angle of the fixtures horizontally to ensure uniform light spots without dark areas.

i.SHA
THE ULTIMATE LIGHTING SOLUTION





基本参数/Parameters

产品型号/Model	AC 9293 55-圆/Round
产品尺寸/Size (mm)	φ62*78H φ75*78H L92.5*78H φ80*78H
开孔尺寸/Cutout (mm)	φ55
功率/Power (W)	6-9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	WALL WASH

产品尺寸图/Dimension (mm)







基本参数/Parameters

产品型号/Model	AC 9293 75-圆/Round
产品尺寸/Size (mm)	φ82*91H φ95*91H L130*91H φ100*91H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	12-15W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	WALL WASH



产品尺寸图/Dimension (mm)







基本参数/Parameters

产品型号/Model	AC 9292 95-圆/Round
产品尺寸/Size (mm)	φ108*103H φ120*103H L160*103H φ120*103H
开孔尺寸/Cutout (mm)	φ95
功率/Power (W)	20-25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	WALL WASH



产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION

i.SHA
THE ULTIMATE LIGHTING SOLUTION



AC 9294 雏影系列
SPOTLIGHT

圆窄边/Round Narrow Edge
圆宽边/Round Wide Edge
圆无边/Round Boundless
圆飞机翼无边/ Round Aircraft Wing Circle Without Edges

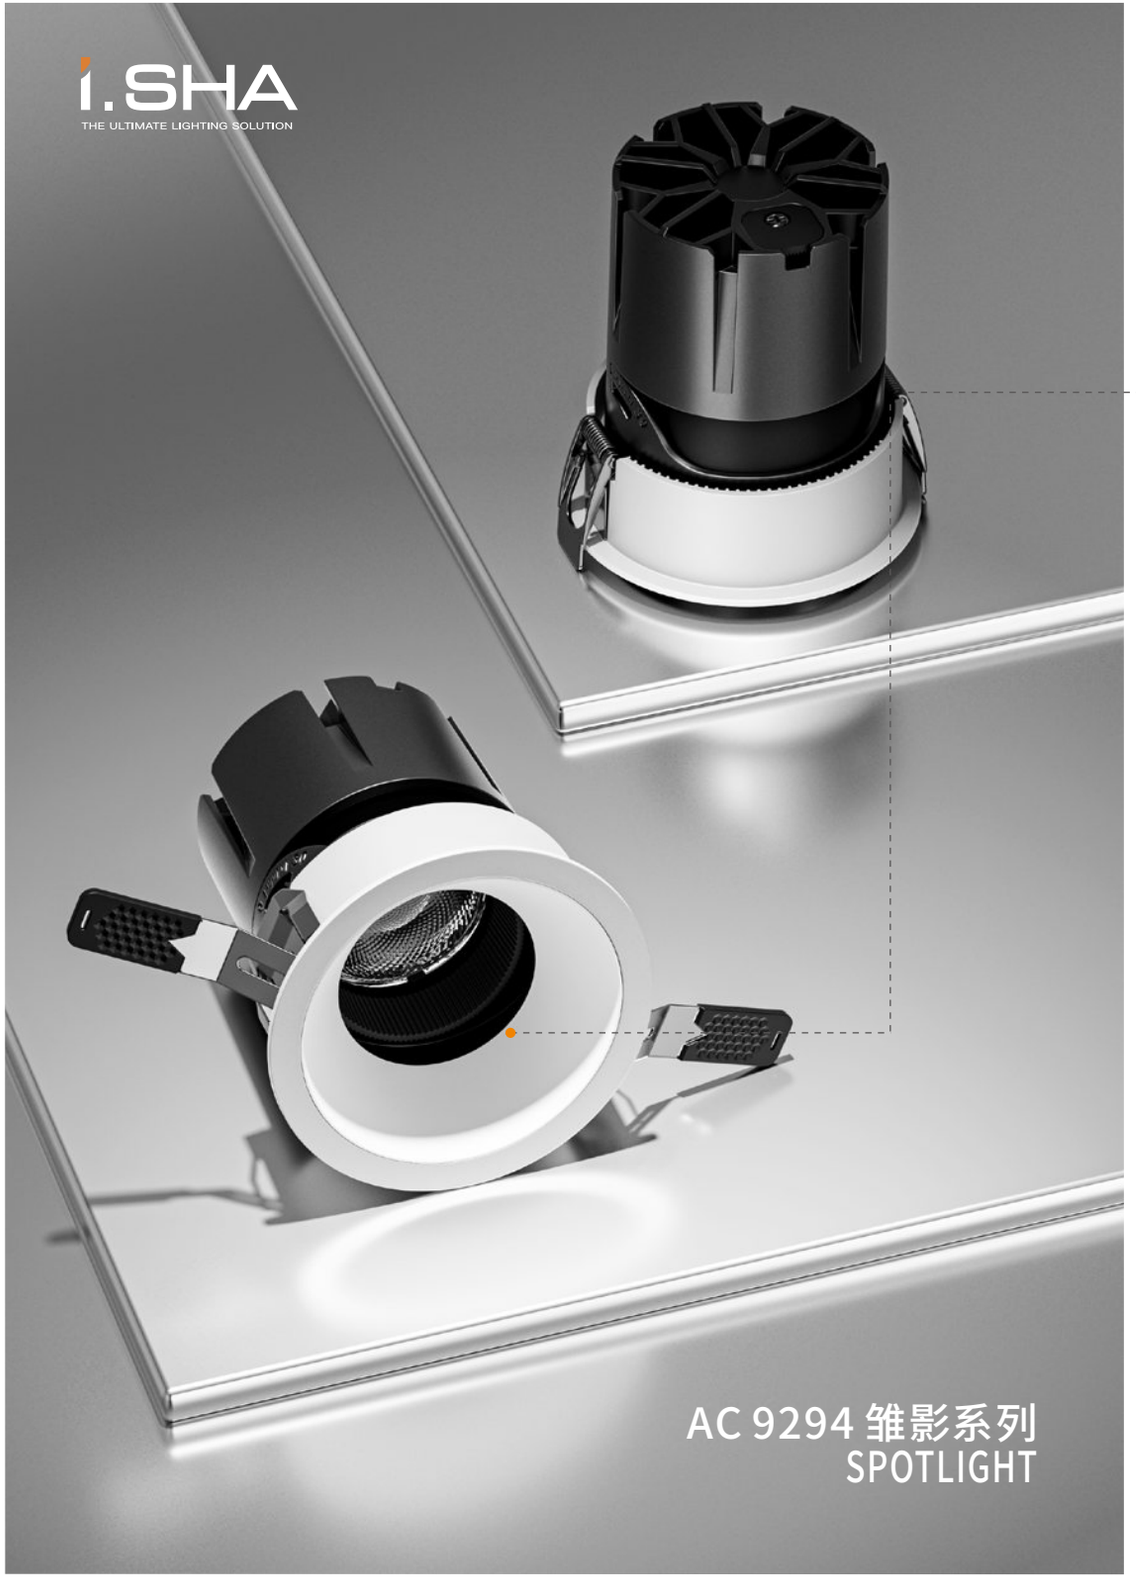



可选防眩反光杯/Anti-glare Cup Color Options

PC款防眩杯/PC Anti Glare Cup	枪黑 Gun Black	亮银 Bright Sliver	亚黑 Matte Black	亚白 Matte White	金色 Golden
铝合金款直面防眩杯 Aluminum Alloy Straight Anti Glare Cup	枪黑 Gun Black	亮银 Bright Sliver	亚黑 Matte Black	亚白 Matte White	金色 Golden
铝合金款弧面防眩杯 Aluminum Alloy Curved Anti Glare Cup	枪黑 Gun Black	亮银 Bright Sliver	亚黑 Matte Black	亚白 Matte White	金色 Golden

铝合金款弧面防眩杯/Aluminum Alloy Curved Anti Glare Cup

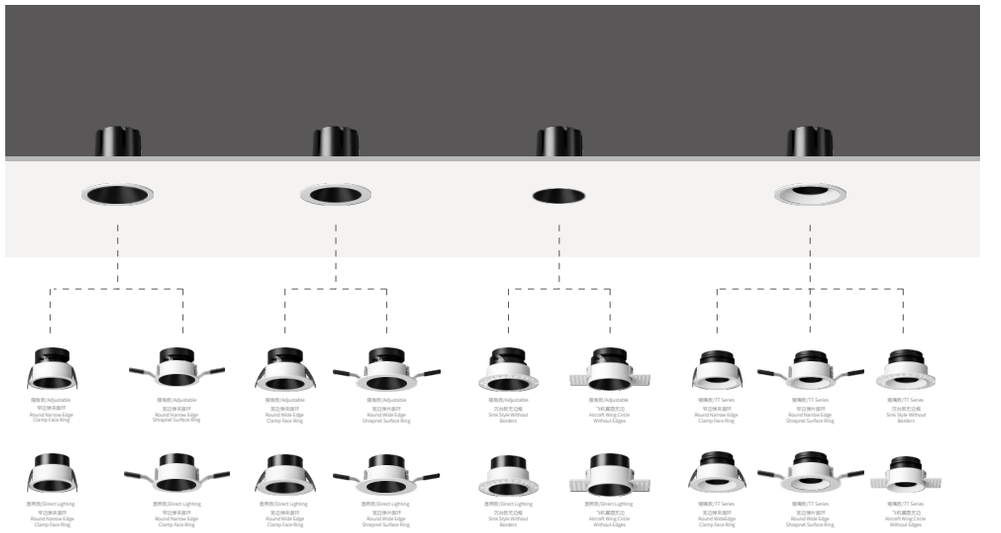





i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9294 55-圆/Round
产品尺寸/Size (mm)	ϕ62*85H ϕ75*85H L92.5*85H ϕ80*85H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	6-9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	AC 9294 55-圆/Round
产品尺寸/Size (mm)	ϕ62*100H ϕ75*100H L92.5*100H ϕ80*100H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	AC 9292 65-圆/Round
产品尺寸/Size (mm)	ϕ72*89H ϕ55*89H L108*89H ϕ90*89H
开孔尺寸/Cutout (mm)	ϕ65
功率/Power (W)	7-10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ65





基本参数/Parameters

产品型号/Model	AC 9292 75-圆/Round
产品尺寸/Size (mm)	ϕ82*90H ϕ95*90H L130*90H ϕ100*90H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75



i.SHA
THE ULTIMATE LIGHTING SOLUTION



内外设有调节刻度/
Internally And Externally Equipped With Adjustable Scales



i.SHA
THE ULTIMATE LIGHTING SOLUTION





基本参数/Parameters

产品型号/Model	AC 9294 75-圆/Round
产品尺寸/Size (mm)	φ82*120H φ95*120H L130*120H φ100*120H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	15-20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ75







基本参数/Parameters

产品型号/Model	AC 9294 95-圆/Round
产品尺寸/Size (mm)	φ82*122H φ95*122H L130*122H φ100*122H
开孔尺寸/Cutout (mm)	φ95
功率/Power (W)	20-25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ95



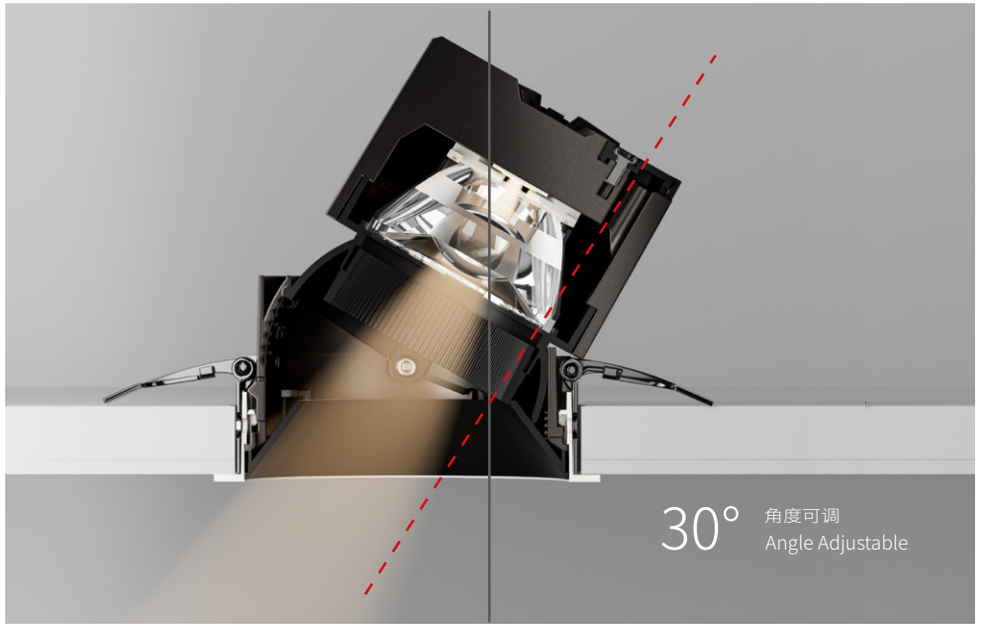



AC 9294 雏影系列
直照款/Direct Lighting

产品结构分析图
Product Structure Analysis Diagram

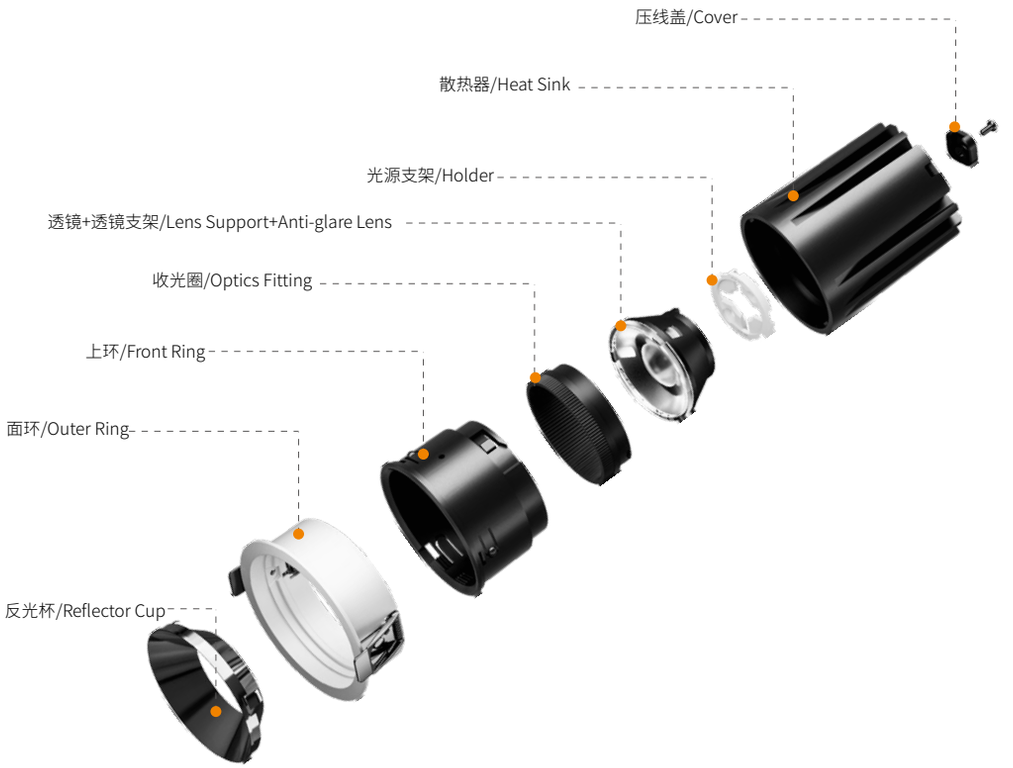

直照款/Direct Lighting



低眩光高光效：
Low glare and high luminous efficiency:

筒灯直照设计增加防眩罩，精准光路主动防眩，出光效率高
Sdirect illumination design of the downlight is enhanced with a glare shield.
The precise light path features active glare prevention, resulting in high light output efficiency

i.SHA
THE ULTIMATE LIGHTING SOLUTION





基本参数/Parameters

产品型号/Model	AC 9294 55-圆/Round
产品尺寸/Size (mm)	ϕ62*81H ϕ75*81H L92.5*81H ϕ80*81H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	6-9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	AC 9294 55-圆/Round
产品尺寸/Size (mm)	ϕ62*96H ϕ75*96H L92.5*96H ϕ80*96H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	AC 9292 65-圆/Round
产品尺寸/Size (mm)	ϕ72*82H ϕ85*82H L108*82H ϕ90*82H
开孔尺寸/Cutout (mm)	ϕ65
功率/Power (W)	7-10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ65





基本参数/Parameters

产品型号/Model	AC 9292 75-圆/Round
产品尺寸/Size (mm)	ϕ82*90H ϕ95*90H L130*90H ϕ100*90H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	AC 9294 75-圆/Round
产品尺寸/Size (mm)	ϕ82*114H ϕ95*114H L130*114H ϕ100*114H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	15-20W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	AC 9294 95-圆/Round
产品尺寸/Size (mm)	ϕ82*112H ϕ95*112H L130*112H ϕ100*112H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	20-25W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95



i.SHA
THE ULTIMATE LIGHTING SOLUTION



AC 9294 雏影系列

镜前灯/小孔出光
Mirror Headlights / Small Hole Light Output

i.SHA
THE ULTIMATE LIGHTING SOLUTION

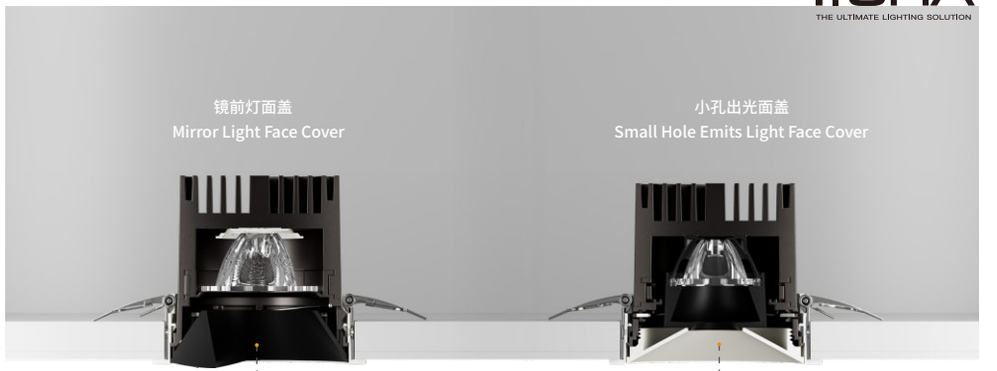



亚白 Matte White | 亚黑 Matte Black | 枪黑 Gun Black | 台阶纹哑白 Step Pattern Matte White | 亚白 Matte White





基本参数/Parameters

产品型号/Model	AC 9294 75-圆/Round
产品尺寸/Size (mm)	ϕ82*68H ϕ95*68H L130*87H ϕ100*87H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	8-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° (朝人/At People) 35° (朝镜子/At Mirror)

产品尺寸图/Dimension (mm)







基本参数/Parameters

产品型号/Model	AC 9294 75-圆/Round
产品尺寸/Size (mm)	ϕ82*84H ϕ95*84H L130*84H ϕ100*84H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 36°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION



AC 9294 雏影系列

猪嘴射灯/Pig Mouth Spotlight

i.SHA
THE ULTIMATE LIGHTING SOLUTION

产品结构分析图

Product Structure Analysis Diagram



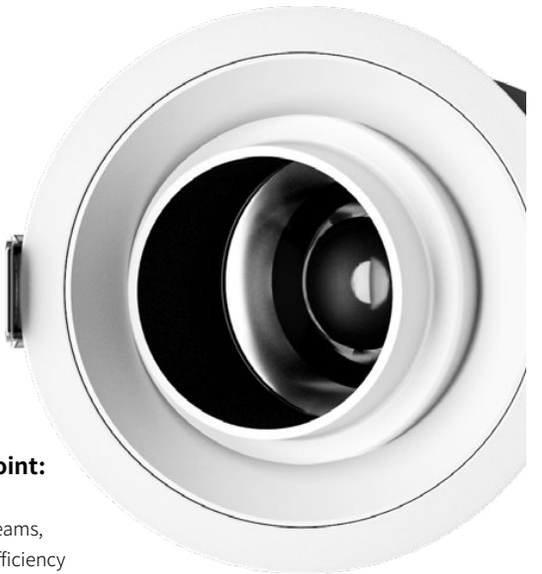

猪嘴射灯/Pig Mouth Spotlight

光到之处 尽是焦点：

Wherever the light reaches, it creates a focal point:

猪嘴设计更加聚焦，精准光束，收口防眩，出光效率高

The design of the pig's Mouth is more focused, with precise beams, a narrowing opening to prevent glare, and high light output efficiency



AC 9294 雏影系列

猪嘴射灯/Pig Mouth Spotlight

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9294 75-圆/Round
产品尺寸/Size (mm)	ϕ82*87H ϕ95*87H L130*90H ϕ100*90H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	8-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24°

产品尺寸图/Dimension (mm)









基本参数/Parameters

产品型号/Model	AC 9294 75-圆/Round
产品尺寸/Size (mm)	ϕ82*117H ϕ95*117H L130*117H ϕ100*117H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	15-20W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24°

产品尺寸图/Dimension (mm)











贴面设计



极窄边框



超宽散热面积



深防眩高光效



超大功率

i.SHA
THE ULTIMATE LIGHTING SOLUTION

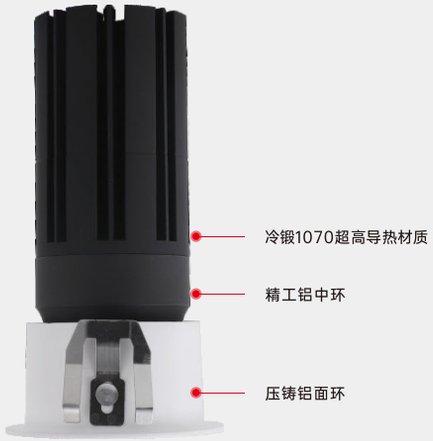







面环颜色 / Color

白(常规) White
黑(常规) Black
亮银 Silvery
枪黑 Gun black
金色 Satin Nickel

反射器可选颜色 / Reflector color optional

哑黑(常规) Black
哑白(常规) White
黑色 Black
亮银 Silvery
枪黑 Gun black

PC ELECTROPLATED VERSION

PC电镀款

KX 3106 悦系列
SPOTLIGHT

i.SHA
THE ULTIMATE LIGHTING SOLUTION

PC电镀45

功率(Power):	8W/12W
角度(beam angle):	10°/15°/24°/36°/55° (10°为光源贴片)
支架(Stents):	1304/020
备注(Remarks):	



PC电镀55

功率(Power):	10W/15W
角度(beam angle):	3°/5°/8°/15°/24°/36°/55°(3° /5°为光源贴片)
支架(Stents):	1304/1507
备注(Remarks):	



PC电镀65

功率(Power):	15W/20W
角度(beam angle):	10°/15°/24°/36°/55°
支架(Stents):	1304/1507
备注(Remarks):	



PC电镀75

功率(Power):	18W/28W
角度(beam angle):	3°/5°/8°/15°/24°/36°/55°(3° /5°为光源贴片)
支架(Stents):	1304/1507
备注(Remarks):	



PC电镀95

功率(Power):	30W/45W
角度(beam angle):	15°/24°/36°/55°
支架(Stents):	1507/1816/1919
备注(Remarks):	



PC电镀115

功率(Power):	60W/70W
角度(beam angle):	15°/24°/36°/55°
支架(Stents):	1507/1816/1919
备注(Remarks):	



i.SHA
THE ULTIMATE LIGHTING SOLUTION







面环颜色 / Color

白(常规) White
黑(常规) Black
亮银 Silvery
枪黑 Gun black
金色 Satin Nickel

DIRECT LIGHTING MODEL
直照款

KX 3106 悦系列
SPOTLIGHT

i.SHA
THE ULTIMATE LIGHTING SOLUTION

直照35

功率(Power):	5W/9W
角度(beam angle):	15°/24°/36°
支架(Stents):	1304
备注(Remarks):	



直照40

功率(Power):	8W/12W
角度(beam angle):	10° /15°/24°/36°
支架(Stents):	1304
备注(Remarks):	



直照45

功率(Power):	8W/12W
角度(beam angle):	10° /15°/24°/36°
支架(Stents):	1304
备注(Remarks):	



直照50

功率(Power):	10W/15W
角度(beam angle):	3° /5°/ 8°/10° /15°/24°/36° (3°/5°为贴片光源)
支架(Stents):	1304/1507
备注(Remarks):	



直照55

功率(Power):	10W/15W
角度(beam angle):	3° /5°/ 8°/10° /15°/24°/36° (3°/5°为贴片光源)
支架(Stents):	1304/1507
备注(Remarks):	



直照60

功率(Power):	15W/20W
角度(beam angle):	10° /15°/24°/36°
支架(Stents):	1304/1507
备注(Remarks):	



直照65

功率(Power):	15W/20W
角度(beam angle):	10° /15°/24°/36°
支架(Stents):	1304/1507
备注(Remarks):	



i.SHA
THE ULTIMATE LIGHTING SOLUTION



冷锻1070超高导热材质

精工铝中环

牛眼万向中环



高光效光学透镜



可选配德国安铝反光杯

面环颜色 / Color

白(常规) White

黑(常规) Black

亮银 Silvery

枪黑 Gun black

金色 Satin Nickel

BULL EYED CEILING LAMP

牛眼天花灯

KX 3122 悦系列
SPOTLIGHT

i.SHA
THE ULTIMATE LIGHTING SOLUTION

牛眼天花75

功率(Power):	18W / 28W
角度(beam angle):	3°/5°/8°/10°/15°/24°/36°/55°(3°/5°为光源贴片)
支架(Stents):	1507/010
备注(Remarks):	



牛眼天花95

功率(Power):	35W / 45W
角度(beam angle):	15°/24°/36°/55°
支架(Stents):	1507 / 1816 /1919
备注(Remarks):	



牛眼天花115

功率(Power):	60W / 70W
角度(beam angle):	15°/24°/36°/55°
支架(Stents):	1507 /1816 /1919
备注(Remarks):	





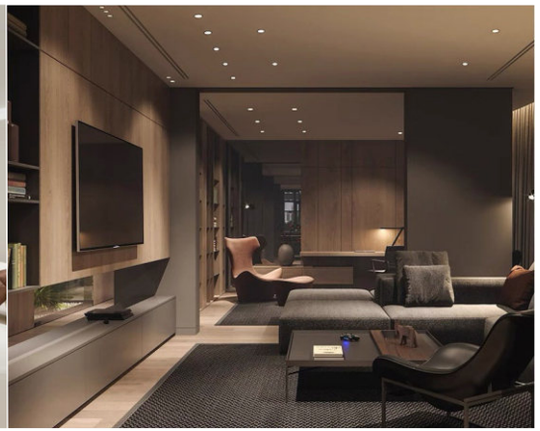

i.SHA
THE ULTIMATE LIGHTING SOLUTION



AC 9268 洛伊系列

深防眩 | 高功率 丨 防水防雾

Deep anti-glare | High power

UGR<9 IP 44



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9268 55-圆/Round
产品尺寸/Size (mm)	ϕ65*94H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	7-8W
光学配置/Holder	1304
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	AC 9268 75-圆/Round
产品尺寸/Size (mm)	ϕ85*98H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10-12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	AC 9268 75-圆/Round
产品尺寸/Size (mm)	ϕ85*98H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	15W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	AC 9268 95-圆/Round
产品尺寸/Size (mm)	ϕ1105*113H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	15-18W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 44
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95



i.SHA
THE ULTIMATE LIGHTING SOLUTION



AC 9268 洛伊系列

深防眩 | 高功率 丨 防水防雾

Deep anti-glare | High power

UGR<9 **IP 44**

i.SHA
THE ULTIMATE LIGHTING SOLUTION

Face ring 面环



圆形
round face ring



圆形预埋
round trimless face ring



方形
Square single head face ring



方形预埋
square single head trimless face ring



方形双头
square double head face ring



方形双头预埋
Square double head trimless face ring

Reflective cup 光杯



玫瑰金
Rose-gold



铬色
Chrome



枪黑
Chrome-black



雾银
Fog-silver



哑白
Matt-white



哑黑
Matt-black



椭圆
Oval Matte white



小圆孔
Round Matte white



偏光杯
Polarizing Cup

Optical Accessories 光学配件



A-蜂窝网
Honeycomb filter



B-拉伸片
Linear



C-单偏片
Single asymmetric



D-双偏片
Double asymmetric



AC 9351 SPOTLIGHT

深防眩 | 高功率 丨 小灯体大瓦数

Deep anti-glare | High power | Small lamp body with large wattage

UGR<9



ϕ55



ϕ75



ϕ95



基本参数/Parameters

产品型号/Model	AC 9351 55-圆/Round
产品尺寸/Size (mm)	ϕ62*100H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	12W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9351 75-圆/Round
产品尺寸/Size (mm)	ϕ83*105H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	18W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9351 95-圆/Round
产品尺寸/Size (mm)	ϕ105*120H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	25W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION

i.SHA
THE ULTIMATE LIGHTING SOLUTION

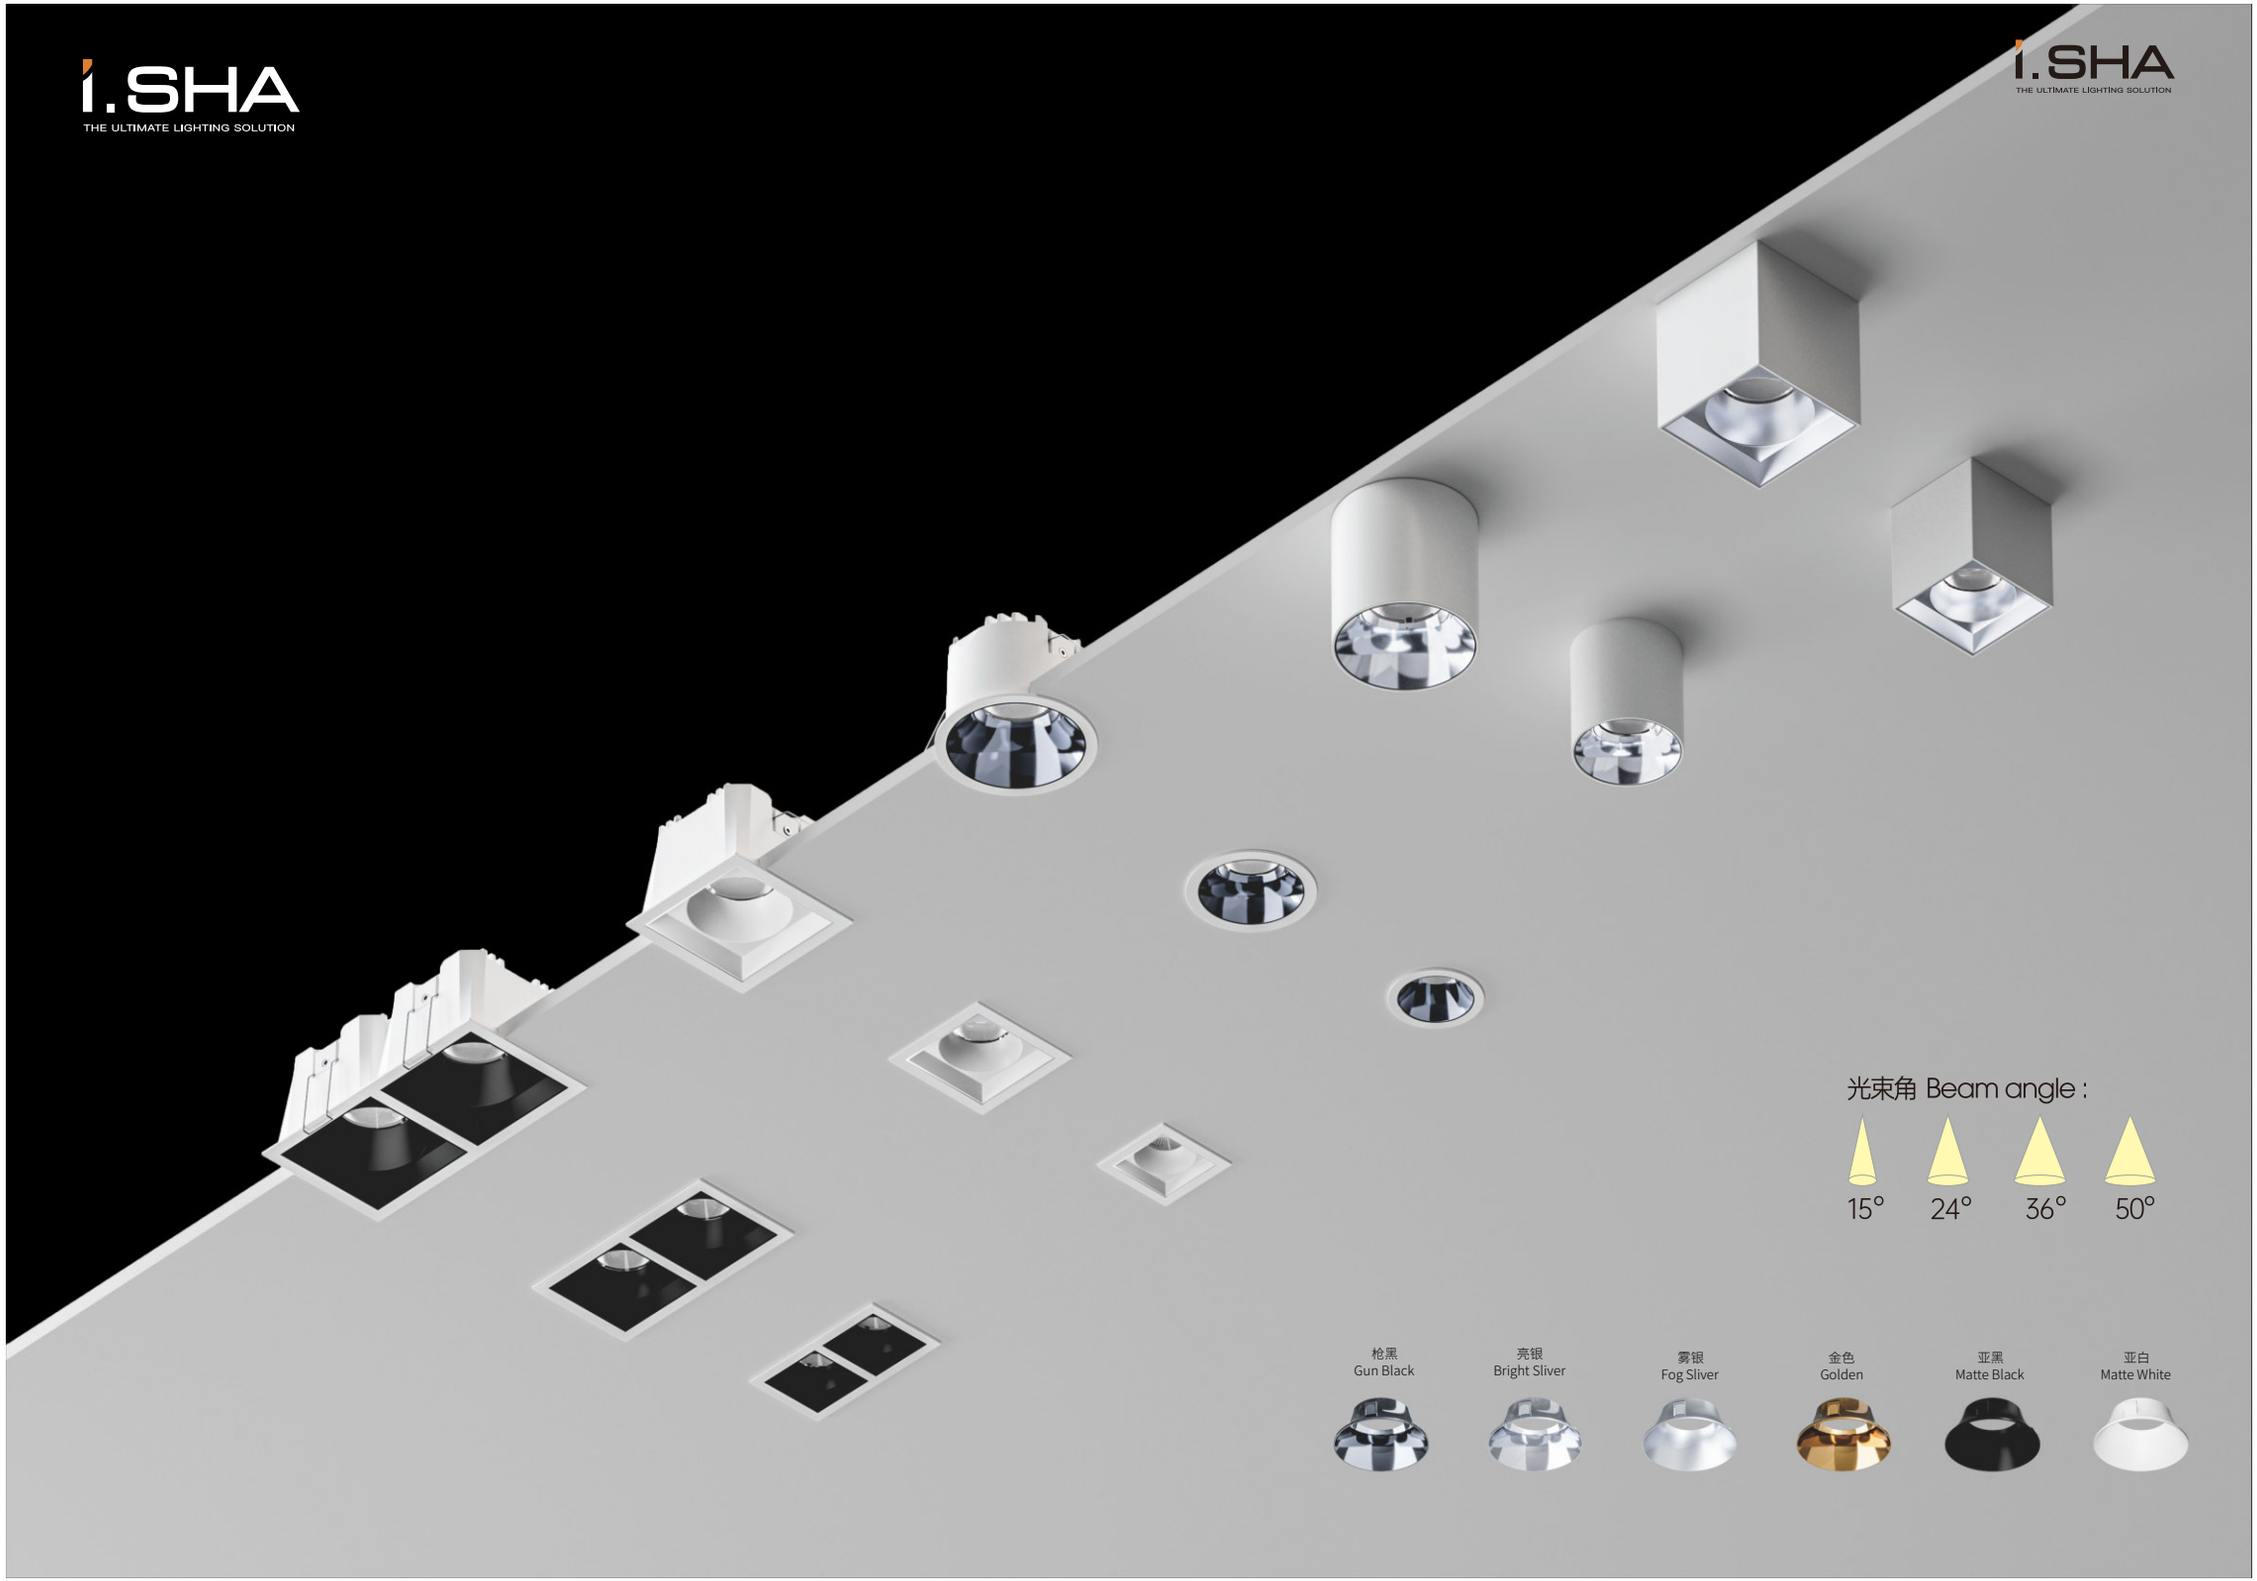



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3132 75-圆/Round & 方/Square
产品尺寸/Size (mm)	ϕ85*59H 85*85*59
开孔尺寸/Cutout (mm)	ϕ75 75*75
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD:ϕ75 SQ:75*75





基本参数/Parameters

产品型号/Model	KX 3132 75*150-方/Square
产品尺寸/Size (mm)	L162.5*85*59H
开孔尺寸/Cutout (mm)	L150*75
功率/Power (W)	12W*2
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
150*75





基本参数/Parameters

产品型号/Model	KX 3132 55-圆/Round & 方/Square
产品尺寸/Size (mm)	ϕ62.5*51H 62.5*62.5*51H
开孔尺寸/Cutout (mm)	ϕ55 55*55
功率/Power (W)	8W
光学配置/Holder	1304/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD: ϕ55 SQ:55*55





基本参数/Parameters

产品型号/Model	KX 3132 55*110-方/Square
产品尺寸/Size (mm)	L118.5*62.5*51H
开孔尺寸/Cutout (mm)	L110*55
功率/Power (W)	8W*2
光学配置/Holder	1304/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L110*55





基本参数/Parameters

产品型号/Model	KX 3132 95-圆/Round & 方/Square
产品尺寸/Size (mm)	ϕ105*73H 105*105*73H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	20W
光学配置/Holder	1507/020/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95





基本参数/Parameters

产品型号/Model	KX 3132 95*190-方/Square
产品尺寸/Size (mm)	L201.2*105*73H
开孔尺寸/Cutout (mm)	L190*95
功率/Power (W)	20W*2
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L190*95



i.SHA
THE ULTIMATE LIGHTING SOLUTION

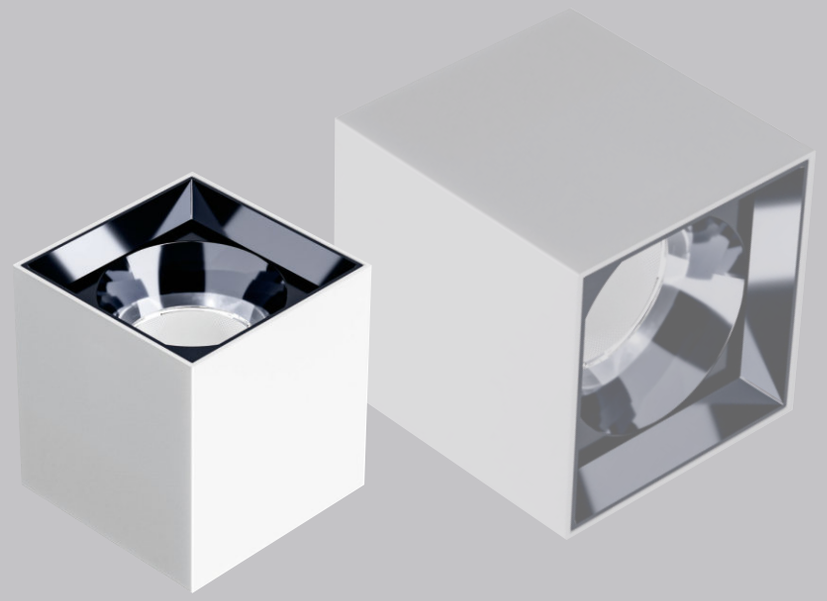

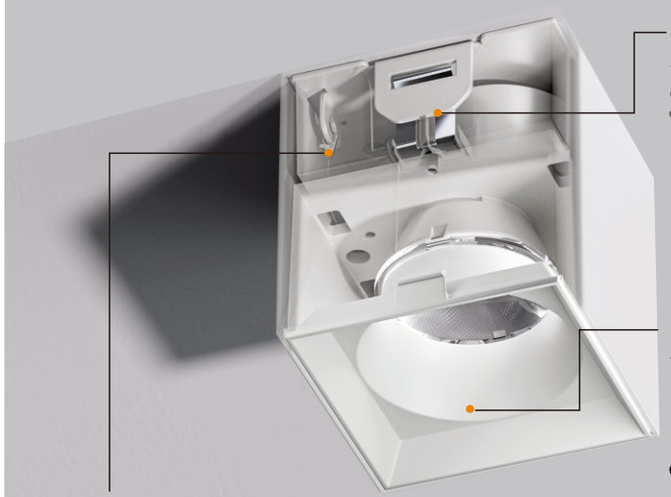

卡扣的弹片固定 高效拆装方便维修
免去拧螺丝刮伤天花板

The snap-on spring clips are fixed,which enables efficient disassembly and assembly and convenient maintenance, eliminating the need to screw in screws and scratch the ceiling.

多种不同颜色的防眩罩，根据不同场景需求匹配

Anti-glare covers of various colors, matched according to the requirements of different scenarios.

防眩罩颜色Anti-glare hood color:



枪黑 Gun Black | 亮银 Bright Sliver | 雾银 Fog Sliver | 亚黑 Matte Black | 亚白 Matte White | 金色 Golden

明装筒灯 金属保险绳 多重防护 安全有保障

Surface-mounted downlight with metal safety rope, multiple protections, and guaranteed safety

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3132 圆/Round Surface
产品尺寸/Size (mm)	ϕ72*78H
开孔尺寸/Cutout (mm)	surface
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

Surface





基本参数/Parameters

产品型号/Model	KX 3132 圆/Round Surface
产品尺寸/Size (mm)	ϕ94*95H
开孔尺寸/Cutout (mm)	Surface
功率/Power (W)	20W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

Surface





基本参数/Parameters

产品型号/Model	KX 3132 方/Square Surface
产品尺寸/Size (mm)	72*72*78*H
开孔尺寸/Cutout (mm)	Surface
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

Surface





基本参数/Parameters

产品型号/Model	KX 3132 91*91-方/Square Surface
产品尺寸/Size (mm)	91*91*95H
开孔尺寸/Cutout (mm)	Surface
功率/Power (W)	20W
光学配置/Holder	1507/020/030/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

Surface



i.SHA
THE ULTIMATE LIGHTING SOLUTION



KX 3050 i.BEI 筒灯系列

KX 3050 **i.BEI** Downlight Series

多种面环设计，满足不同场所应用需求

Multiple face ring designs are available to meet the application requirements of different places

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3050-A 75-圆/Round
产品尺寸/Size (mm)	ϕ88*55H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX 3050-B 75-圆/Round
产品尺寸/Size (mm)	ϕ88*55H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX 3050-C 75-圆/Round
产品尺寸/Size (mm)	ϕ88*55H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX 3050-D 75-圆/Round
产品尺寸/Size (mm)	ϕ88*55H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION



KX 3062 高光效筒灯系列

KX 3062 High-Efficiency Downlight Series

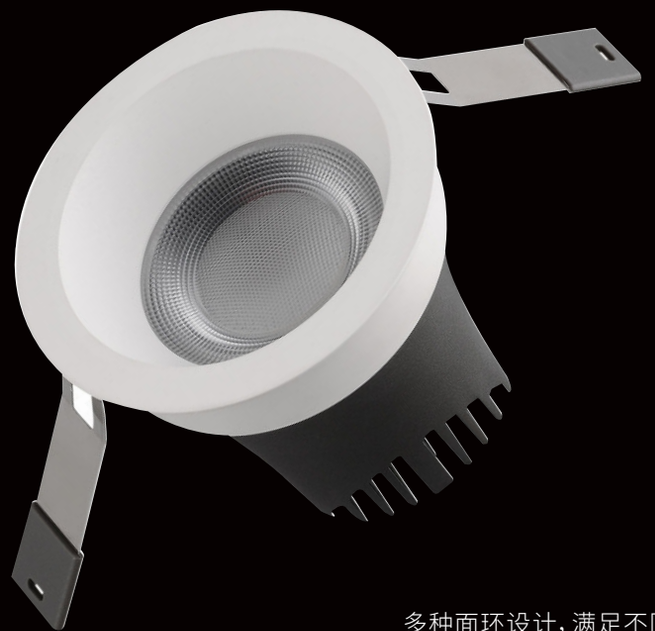

多种面环设计，满足不同场所应用需求

Multiple face ring designs are available to meet the application requirements of different places






i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3062 75-圆/Round
产品尺寸/Size (mm)	φ82*72H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX 3062 55-圆/Round
产品尺寸/Size (mm)	φ61*50H
开孔尺寸/Cutout (mm)	φ55
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX 3062 75-圆/Round
产品尺寸/Size (mm)	φ81*70H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION









基本参数/Parameters

产品型号/Model	KX 3062 55-圆/Round
产品尺寸/Size (mm)	ϕ61*50H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD: ϕ55







基本参数/Parameters

产品型号/Model	KX 3062 75-圆/Round
产品尺寸/Size (mm)	ϕ81*71H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD: ϕ75





KX 3062 高光效筒灯系列

KX 3062 High-Efficiency Downlight Series





基本参数/Parameters

产品型号/Model	KX 3062 55-圆/Round
产品尺寸/Size (mm)	ϕ61*50H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	KX 3062 75-圆/Round
产品尺寸/Size (mm)	ϕ81*71H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	KX 3062 55-圆/Round
产品尺寸/Size (mm)	ϕ61*50H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	5W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD: ϕ55





基本参数/Parameters

产品型号/Model	KX 3062 75-圆/Round
产品尺寸/Size (mm)	ϕ81*71H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	10W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD: ϕ75





Related Products

Recessed

西郎德 小圆孔透镜

Syllande Small circular hole lens

小圆孔交叉出光，光束更聚光，更有层次感

The small round holes cross out light, making the beam more focused and giving it a more layered effect



KX 3036-C series

KX 3036-A series

Related Products

Recessed

西郎德 小圆孔透镜

Syllande Small circular hole lens

小圆孔交叉出光，光束更聚光，更有层次感

The small round holes cross out light, making the beam more focused and giving it a more layered effect





基本参数/Parameters

产品型号/Model	KX 3036 45-圆/Round
产品尺寸/Size (mm)	ϕ52*40H ϕ52*52H
开孔尺寸/Cutout (mm)	ϕ45
功率/Power (W)	5W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ45







基本参数/Parameters

产品型号/Model	KX 3036 55-圆/Round
产品尺寸/Size (mm)	ϕ62*54H ϕ62*62H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	9W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55







基本参数/Parameters

产品型号/Model	KX 3036 65-圆/Round
产品尺寸/Size (mm)	ϕ73*60H ϕ73*80H
开孔尺寸/Cutout (mm)	ϕ65
功率/Power (W)	12W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ65







基本参数/Parameters

产品型号/Model	KX 3036 75-圆/Round
产品尺寸/Size (mm)	ϕ83*65H ϕ83*90H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	18W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75



i.SHA
THE ULTIMATE LIGHTING SOLUTION



携手格锐光学 深筒防眩杯

Collaborate with Grei Optics for Deep Tube Anti-glare Cup



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3036-D 45-圆/Round
产品尺寸/Size (mm)	φ52*40H
开孔尺寸/Cutout (mm)	φ45
功率/Power (W)	5W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ45





基本参数/Parameters

产品型号/Model	KX 3036-D 55-圆/Round
产品尺寸/Size (mm)	φ62*54H
开孔尺寸/Cutout (mm)	φ55
功率/Power (W)	9W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ55





基本参数/Parameters

产品型号/Model	KX 3036-D 65-圆/Round
产品尺寸/Size (mm)	φ73*60H
开孔尺寸/Cutout (mm)	φ65
功率/Power (W)	12W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ65





基本参数/Parameters

产品型号/Model	KX 3036-D 75-圆/Round
产品尺寸/Size (mm)	φ83*65H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	18W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ75



i.SHA
THE ULTIMATE LIGHTING SOLUTION



KX3036D Series



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3036-B 45-圆/Round
产品尺寸/Size (mm)	ϕ52*52H
开孔尺寸/Cutout (mm)	ϕ45
功率/Power (W)	5W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ45





基本参数/Parameters

产品型号/Model	KX 3036-B 55-圆/Round
产品尺寸/Size (mm)	ϕ62*62H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	9W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	KX 3036-B 65-圆/Round
产品尺寸/Size (mm)	ϕ73*80H
开孔尺寸/Cutout (mm)	ϕ65
功率/Power (W)	12W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ65





基本参数/Parameters

产品型号/Model	KX 3036-B 75-圆/Round
产品尺寸/Size (mm)	ϕ83*90H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	18W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75







AC 9345-A 系列

AC 9345 Downlight Series



基本参数/Parameters

产品型号/Model	AC 9345-A 35-圆/Round
产品尺寸/Size (mm)	ϕ40*47H
开孔尺寸/Cutout (mm)	ϕ35
功率/Power (W)	3W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9345-A 45-圆/Round
产品尺寸/Size (mm)	ϕ50*55H
开孔尺寸/Cutout (mm)	ϕ45
功率/Power (W)	6W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9345-A 55-圆/Round
产品尺寸/Size (mm)	ϕ60*60H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION




φ35


φ45


φ55





基本参数/Parameters

产品型号/Model	AC 9345-B 35-圆/Round
产品尺寸/Size (mm)	φ40*47H
开孔尺寸/Cutout (mm)	φ35
功率/Power (W)	3W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)







基本参数/Parameters

产品型号/Model	AC 9345-B 45-圆/Round
产品尺寸/Size (mm)	φ50*55H
开孔尺寸/Cutout (mm)	φ45
功率/Power (W)	6W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)







基本参数/Parameters

产品型号/Model	AC 9345-B 55-圆/Round
产品尺寸/Size (mm)	φ60*57H
开孔尺寸/Cutout (mm)	φ55
功率/Power (W)	9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION

AC 9345-C 系列

AC 9345-C Downlight Series

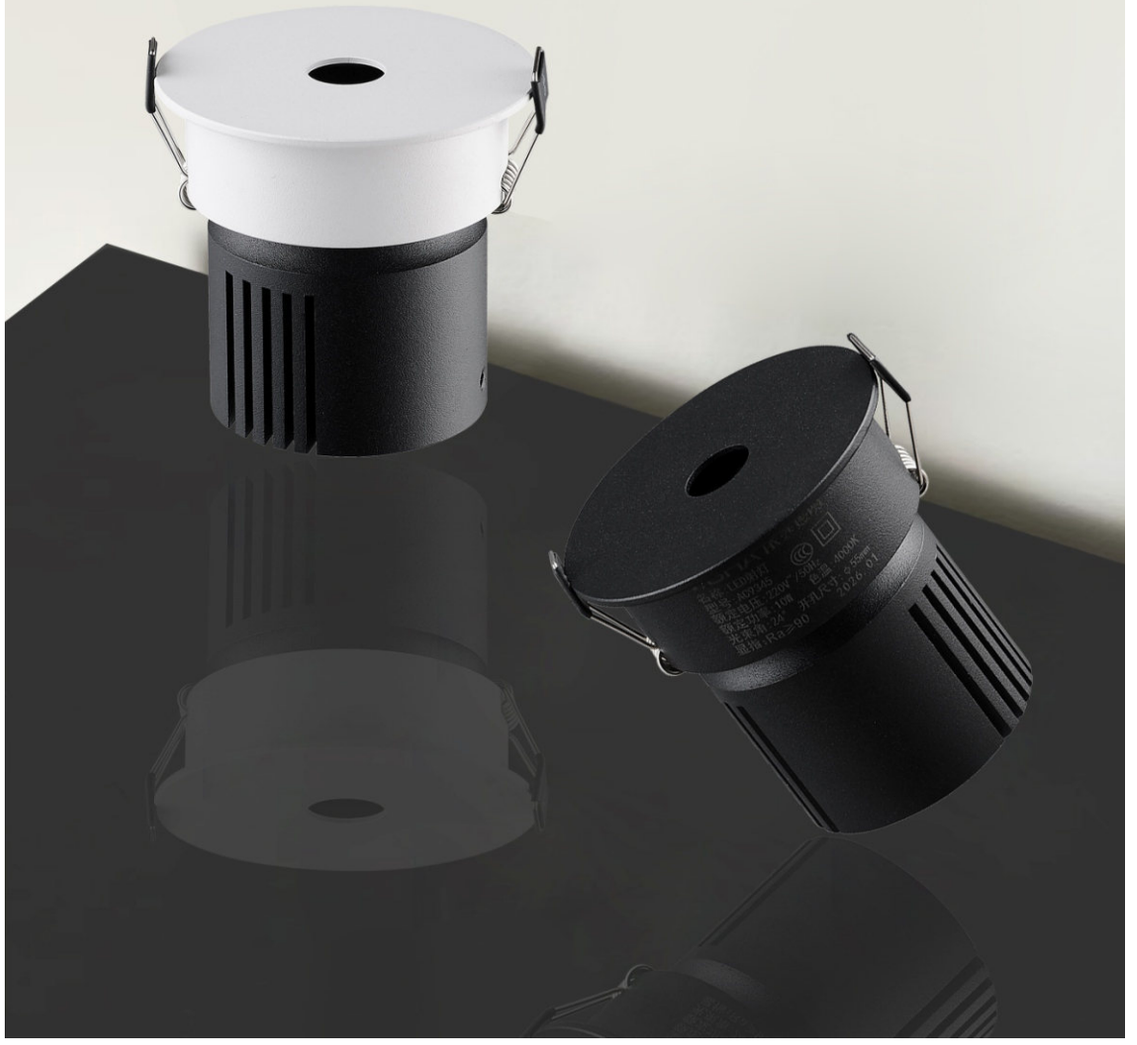

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9345-C 35-圆/Round
产品尺寸/Size (mm)	ϕ40*47H
开孔尺寸/Cutout (mm)	ϕ35
功率/Power (W)	3W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 38°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9345-C 45-圆/Round
产品尺寸/Size (mm)	ϕ50*55H
开孔尺寸/Cutout (mm)	ϕ35
功率/Power (W)	6W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 38°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9345-C 55-圆/Round
产品尺寸/Size (mm)	ϕ60*57H
开孔尺寸/Cutout (mm)	ϕ55
功率/Power (W)	9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	24° 38°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION





基本参数/Parameters

产品型号/Model	AC 9345-D 方/Square
产品尺寸/Size (mm)	54*49*52H
开孔尺寸/Cutout (mm)	45*45
功率/Power (W)	3W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
45*45





基本参数/Parameters

产品型号/Model	AC 9345-D 方/Square
产品尺寸/Size (mm)	94*49*52H
开孔尺寸/Cutout (mm)	45*90
功率/Power (W)	6W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
45*90





基本参数/Parameters

产品型号/Model	AC 9345-D 方/Square
产品尺寸/Size (mm)	134*49*52H
开孔尺寸/Cutout (mm)	45*125
功率/Power (W)	9W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°

产品尺寸图/Dimension (mm)

开孔/Cutout
45*125



i.SHA
THE ULTIMATE LIGHTING SOLUTION

AC 9345-D Series

Cut-Size(mm): 45*45 45*90 45*125

i.SHA
THE ULTIMATE LIGHTING SOLUTION

AC 9346 系列

AC 9346 Downlight Series

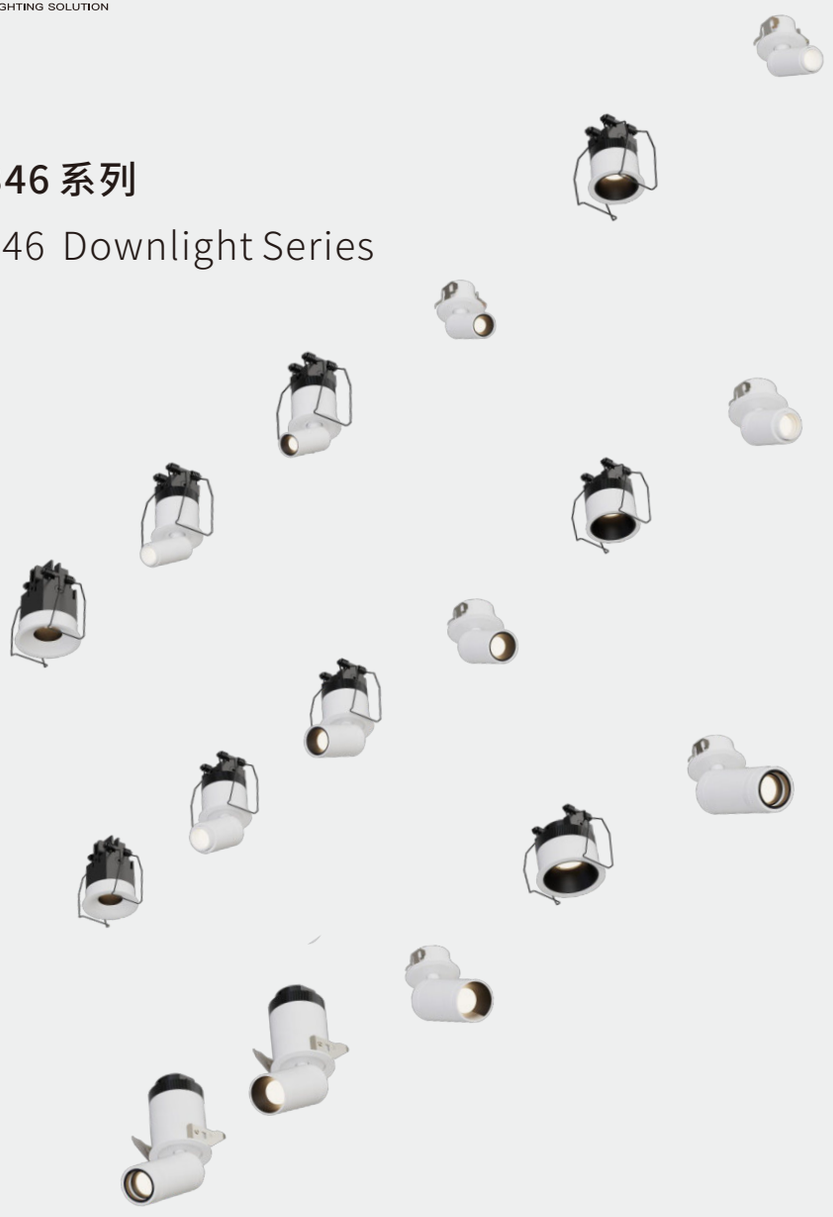

迷你小射灯设计，固定直照/嵌入式/半嵌入/调焦等，满足不同场景需求

Mini spotlight design, with fixed direct lighting, embedded, semi-embedded, and adjustable focus options, to meet the needs of various scenarios.

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters	
产品型号/Model	AC 9346 35-圆/Round
产品尺寸/Size (mm)	ϕ38*61H
开孔尺寸/Cutout (mm)	ϕ35
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ35





基本参数/Parameters	
产品型号/Model	AC 9346 25-圆/Round
产品尺寸/Size (mm)	ϕ29*48H
开孔尺寸/Cutout (mm)	ϕ25
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ25





基本参数/Parameters	
产品型号/Model	AC 9346 30-圆/Round
产品尺寸/Size (mm)	ϕ33*51H
开孔尺寸/Cutout (mm)	ϕ30
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ30





基本参数/Parameters	
产品型号/Model	AC 9346 40-圆/Round
产品尺寸/Size (mm)	ϕ43*53H
开孔尺寸/Cutout (mm)	ϕ40
功率/Power (W)	5W
光学配置/Holder	SMD 3535
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ40



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9346 25-圆/Round
产品尺寸/Size (mm)	ϕ29*60H ϕ25*H48
开孔尺寸/Cutout (mm)	ϕ25 ϕ20
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ25 & ϕ20





基本参数/Parameters

产品型号/Model	AC 9346 30-圆/Round
产品尺寸/Size (mm)	ϕ35*70H ϕ35*56
开孔尺寸/Cutout (mm)	ϕ30 ϕ30
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ30





基本参数/Parameters

产品型号/Model	AC 9346 40-圆/Round
产品尺寸/Size (mm)	ϕ43*78H ϕ35*H74
开孔尺寸/Cutout (mm)	ϕ40 ϕ30
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ40 & ϕ30



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9346 25-圆/Round
产品尺寸/Size (mm)	ϕ29*60H ϕ25*H48
开孔尺寸/Cutout (mm)	ϕ25 ϕ20
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	Focus:15°-40° 15° 40°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ25 & ϕ20





基本参数/Parameters

产品型号/Model	AC 9346 30-圆/Round
产品尺寸/Size (mm)	ϕ35*70H ϕ35*56
开孔尺寸/Cutout (mm)	ϕ30 ϕ30
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	Focus:15°-40° 15° 40°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ30





基本参数/Parameters

产品型号/Model	AC 9346 40-圆/Round
产品尺寸/Size (mm)	ϕ43*78H ϕ35*H74
开孔尺寸/Cutout (mm)	ϕ40 ϕ30
功率/Power (W)	3W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	Focus:15°-40° 15° 40°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ40 & ϕ30



光束角变化15°-40°
The beam angle changes by 15°-40° degrees.
自由变焦，既可聚光也可散光,拉长,光斑变小,缩短光斑变大
Free zooming, it can both focus and defocus. When zooming in, the light spot becomes smaller; when zooming out, the light spot becomes larger

i.SHA
THE ULTIMATE LIGHTING SOLUTION



多重防眩-专业级光学设计,让光环境更舒适

Multiple anti-glare
Professional optical design makes the light environment more comfortable







基本参数/Parameters

产品型号/Model	AC 9346 35-圆/Round
产品尺寸/Size (mm)	ϕ38*40H
开孔尺寸/Cutout (mm)	ϕ35
功率/Power (W)	3W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD: ϕ35





基本参数/Parameters

产品型号/Model	AC 9346 45-圆/Round
产品尺寸/Size (mm)	ϕ48*47H
开孔尺寸/Cutout (mm)	ϕ45
功率/Power (W)	3W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
RD: ϕ45



i.SHA
THE ULTIMATE LIGHTING SOLUTION

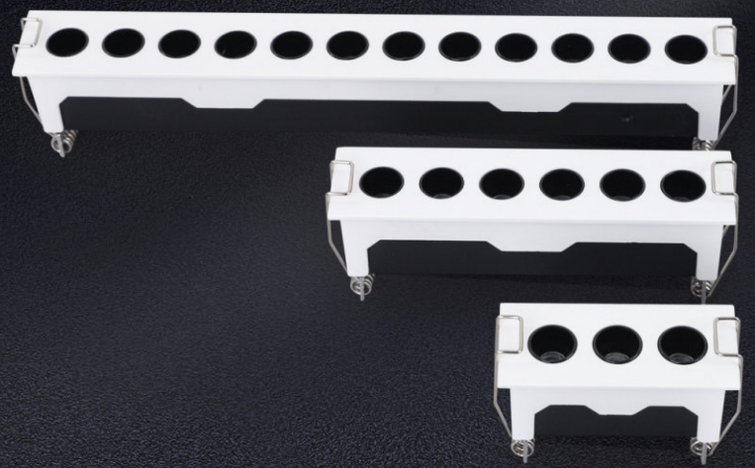



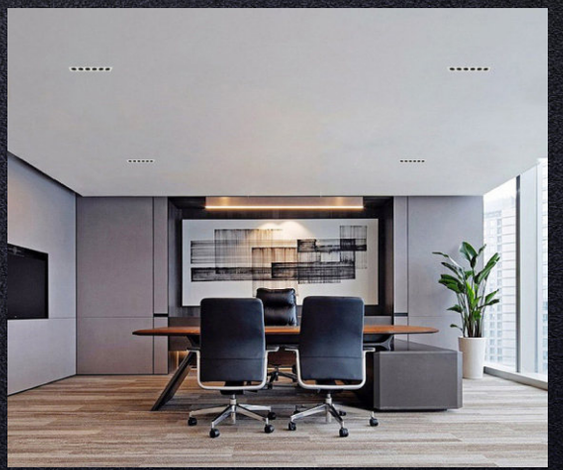

Embedded grid spotlights (linear spotlights)

Die-cast aluminum radiator 2-hole, 6-hole, 12-hole

The lamp cup is usually paired with a deep anti-glare optical structure, providing soft and non-dazzling light to enhance the comfort of the space. It can be flexibly selected according to the size of the space and the lighting requirements

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	IS 3302 方/square
产品尺寸/Size (mm)	L73*32*50H
开孔尺寸/Cutout (mm)	L68*25
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 45°

产品尺寸图/Dimension (mm)

开孔/Cutout
L68*25





基本参数/Parameters

产品型号/Model	IS 3302 方/square
产品尺寸/Size (mm)	L133*32*50H
开孔尺寸/Cutout (mm)	L128*25
功率/Power (W)	2W*6
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 45°

产品尺寸图/Dimension (mm)

开孔/Cutout
L128*25





基本参数/Parameters

产品型号/Model	IS 3302 方/square
产品尺寸/Size (mm)	L253*32*50H
开孔尺寸/Cutout (mm)	L248*25
功率/Power (W)	2W*12
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L248*25



i.SHA
THE ULTIMATE LIGHTING SOLUTION



光学透镜-透光均匀，无光斑
Optical lens - Uniform light transmission, no light spots

光源深藏设计避免光源刺眼
The design of the light source is concealed to prevent it from being too bright and causing discomfort

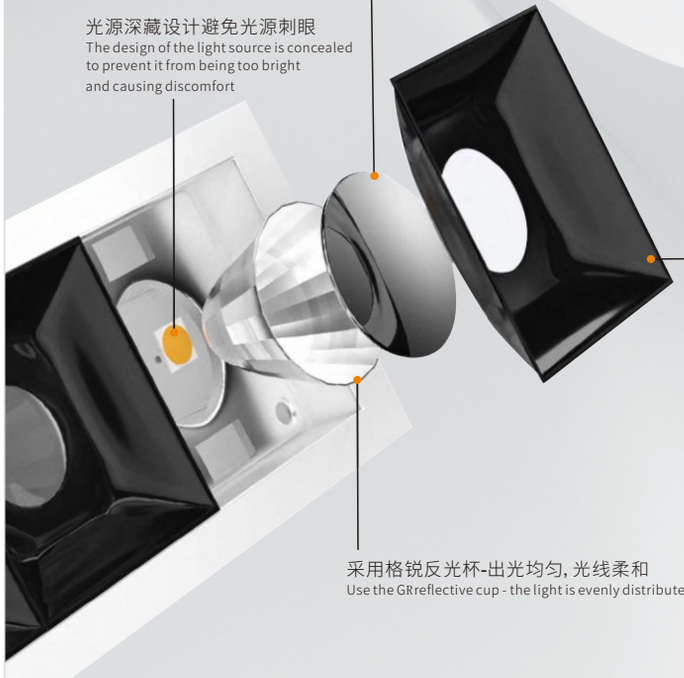

黑光防眩罩-有效的吸收杂光深藏防眩
Black light anti-glare hood - Effectively absorbs stray light and deeply conceals the anti-glare feature

采用格锐反光杯-出光均匀，光线柔和
Use the GRreflective cup - the light is evenly distributed and the illumination is soft

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L45*45*50H
开孔尺寸/Cutout (mm)	L38*38
功率/Power (W)	2W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 45°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L75*45*50H
开孔尺寸/Cutout (mm)	L68*38
功率/Power (W)	2W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 45°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L94*45*40H
开孔尺寸/Cutout (mm)	L86*38
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L148*45*50H
开孔尺寸/Cutout (mm)	L138*38
功率/Power (W)	2W*5
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION



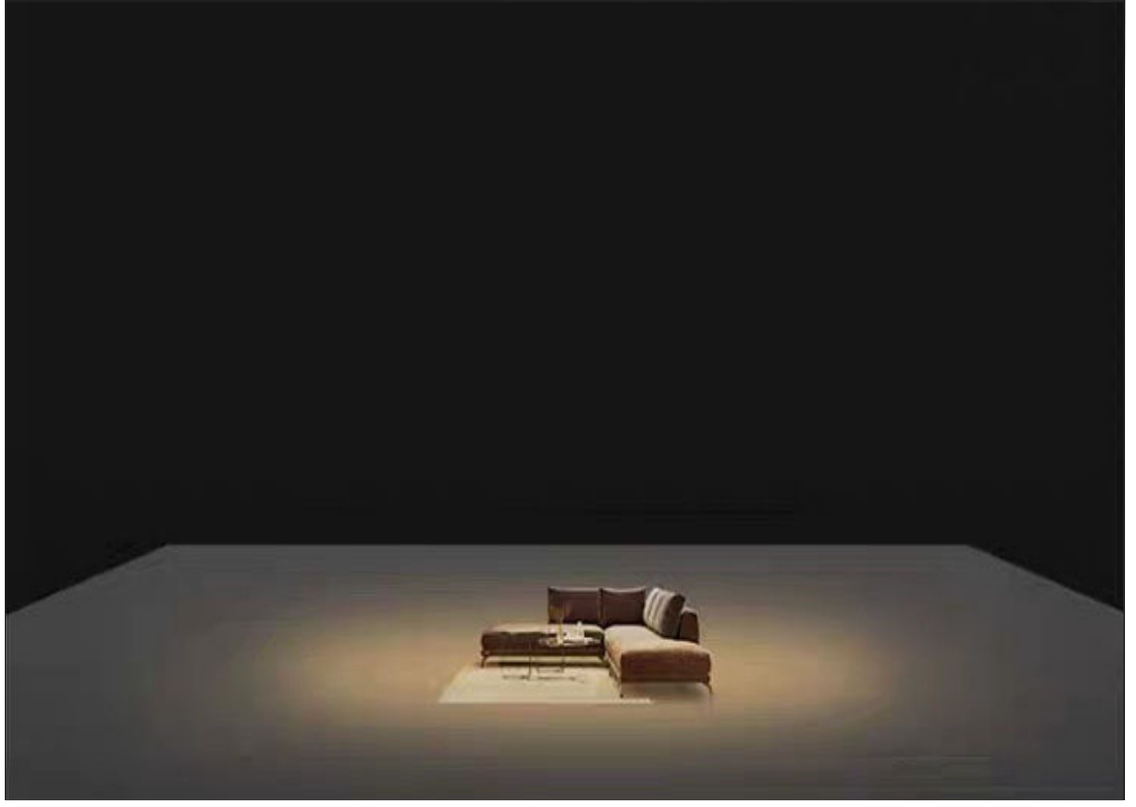

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L173*45*40H
开孔尺寸/Cutout (mm)	L162*38
功率/Power (W)	2W*6
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 45°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L279*45*50H
开孔尺寸/Cutout (mm)	L128*25
功率/Power (W)	2W*10
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 45°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L332*45*40H
开孔尺寸/Cutout (mm)	L325*38
功率/Power (W)	2W*12
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L411*45*50H
开孔尺寸/Cutout (mm)	L403*38
功率/Power (W)	2W*15
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION

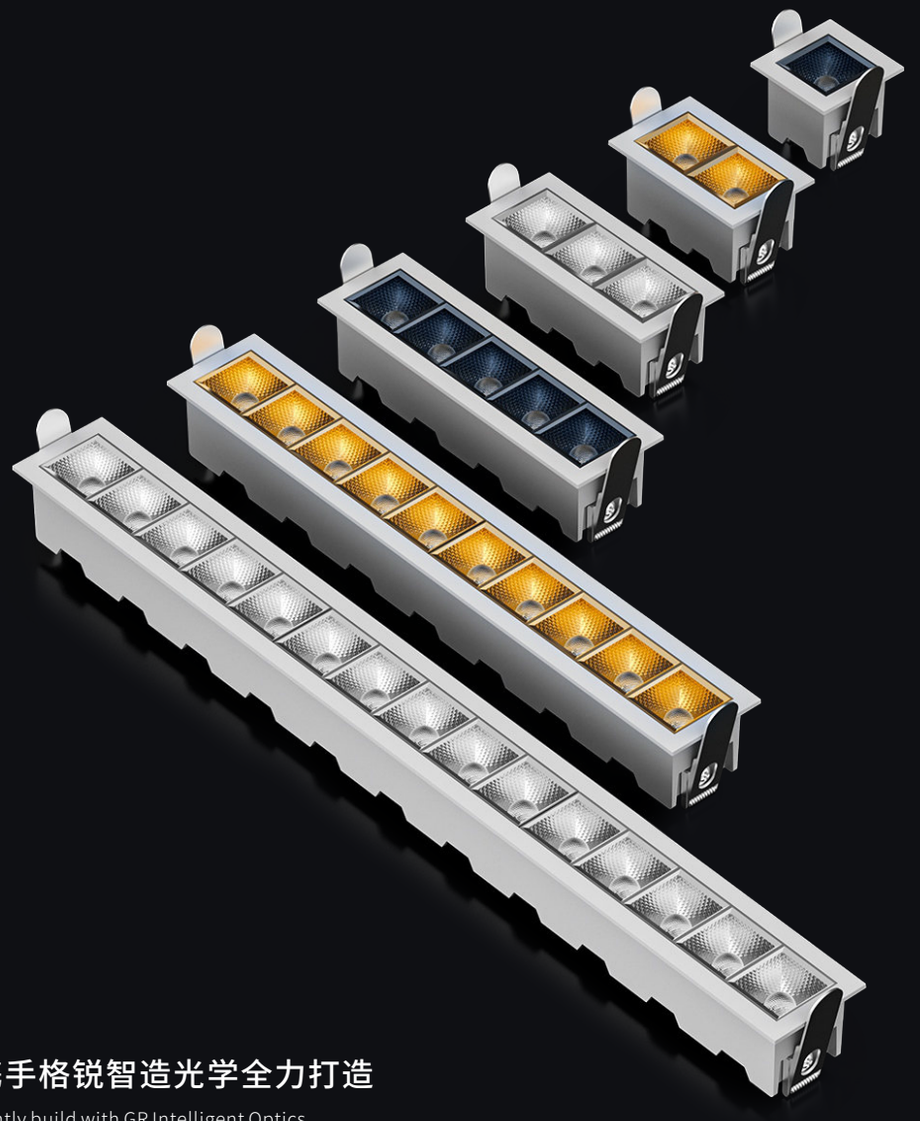

携手格锐智造光学全力打造

Jointly build with GR Intelligent Optics

50°80°大发光角度-发光效率高，每瓦可达160流明

50°, 80° - Wide viewing angle, High luminous efficiency,
with up to 160 lumens per watt

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L45*46*53H
开孔尺寸/Cutout (mm)	L35*36
功率/Power (W)	2W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	50° 80°

产品尺寸图/Dimension (mm)



基本参数/Parameters



产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L75*46*53H
开孔尺寸/Cutout (mm)	L65*36
功率/Power (W)	2W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	50° 80°

产品尺寸图/Dimension (mm)



基本参数/Parameters



产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L105*46*53H
开孔尺寸/Cutout (mm)	L95*36
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	50° 80°

产品尺寸图/Dimension (mm)



基本参数/Parameters



产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L155*46*53H
开孔尺寸/Cutout (mm)	L145*36
功率/Power (W)	2W*5
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	50° 80°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION



携手格锐智造光学全力打造
Jointly build with GR Intelligent Optics

50°80°大发光角度
50°, 80° - Wide viewing angle

发光效率高,每瓦可达160流明
High luminous efficiency, with up to 160 lumens per watt



基本参数/Parameters

产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L295*46*53H
开孔尺寸/Cutout (mm)	L128*25
功率/Power (W)	2W*10
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	50° 80°

产品尺寸图/Dimension (mm)

开孔/Cutout
L285*36





基本参数/Parameters

产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L435*46*53H
开孔尺寸/Cutout (mm)	L425*36
功率/Power (W)	2W*15
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	50° 80°

产品尺寸图/Dimension (mm)

开孔/Cutout
L425*36







基本参数/Parameters

产品型号/Model	IS 3303 方/square
产品尺寸/Size (mm)	L147*45*50H
开孔尺寸/Cutout (mm)	L138*38
功率/Power (W)	2W*5
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 54
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	38°

产品尺寸图/Dimension (mm)

开孔/Cutout
L138*38



i.SHA
THE ULTIMATE LIGHTING SOLUTION



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	IS 3306 方/square
产品尺寸/Size (mm)	L43*40*43H
开孔尺寸/Cutout (mm)	L40*35
功率/Power (W)	2W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L40*35





基本参数/Parameters

产品型号/Model	IS 3306 方/square
产品尺寸/Size (mm)	L72*40*43H
开孔尺寸/Cutout (mm)	L68*35
功率/Power (W)	2W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L68*35





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L100*40*43H
开孔尺寸/Cutout (mm)	L96*35
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L96*35





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L162*40*43H
开孔尺寸/Cutout (mm)	L156*35
功率/Power (W)	2W*5
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L156*35



i.SHA
THE ULTIMATE LIGHTING SOLUTION



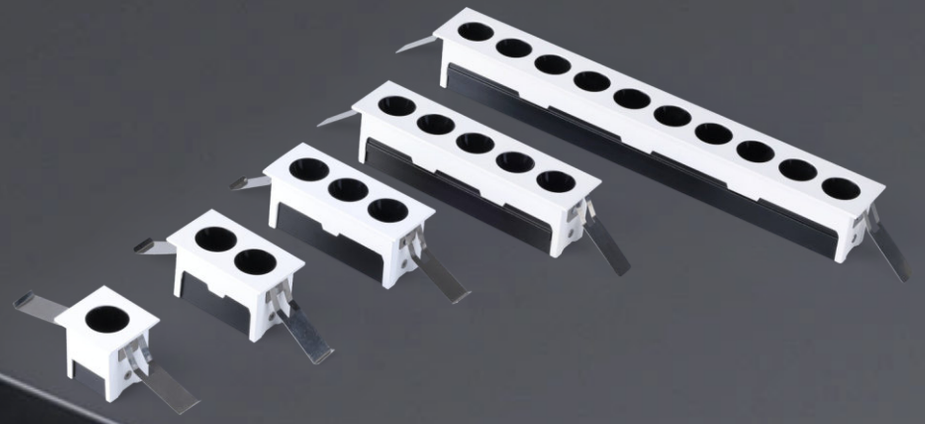

2种弹片安装
Installation of two types of shrapnel

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9178 方/square
产品尺寸/Size (mm)	L40*43*42H
开孔尺寸/Cutout (mm)	L40*35
功率/Power (W)	2W
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L40*35





基本参数/Parameters

产品型号/Model	AC 9178 方/square
产品尺寸/Size (mm)	L72*40*42H
开孔尺寸/Cutout (mm)	L70*35
功率/Power (W)	2W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L72*35





基本参数/Parameters

产品型号/Model	AC 9178 方/square
产品尺寸/Size (mm)	L100*40*42H
开孔尺寸/Cutout (mm)	L98*35
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L98*35





基本参数/Parameters

产品型号/Model	IS 3300 方/square
产品尺寸/Size (mm)	L162*40*42H
开孔尺寸/Cutout (mm)	L158*35
功率/Power (W)	2W*5
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L158*35





基本参数/Parameters

产品型号/Model	AC 9178 方/square
产品尺寸/Size (mm)	L312*40*42H
开孔尺寸/Cutout (mm)	L308*35
功率/Power (W)	2W*10
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 30° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L308*35



i.SHA
THE ULTIMATE LIGHTING SOLUTION



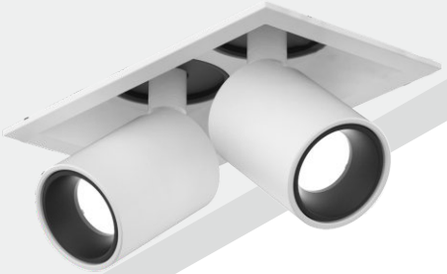

AC 9348 Grille series

Multiple combination designs, adjustable to 350° rotation and 90° irradiation



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9348 Line light 方/square
产品尺寸/Size (mm)	L70.5*32*48H
开孔尺寸/Cutout (mm)	L63*25
功率/Power (W)	2W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L63*25





基本参数/Parameters

产品型号/Model	AC 9348 Line light 方/square
产品尺寸/Size (mm)	L127.5*32*48H
开孔尺寸/Cutout (mm)	L120*25
功率/Power (W)	2W*4
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L120*25





基本参数/Parameters

产品型号/Model	AC 9348 Line light 方/square
产品尺寸/Size (mm)	L245*32*48H
开孔尺寸/Cutout (mm)	L240*25
功率/Power (W)	2W*8
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L240*25



i.SHA
THE ULTIMATE LIGHTING SOLUTION

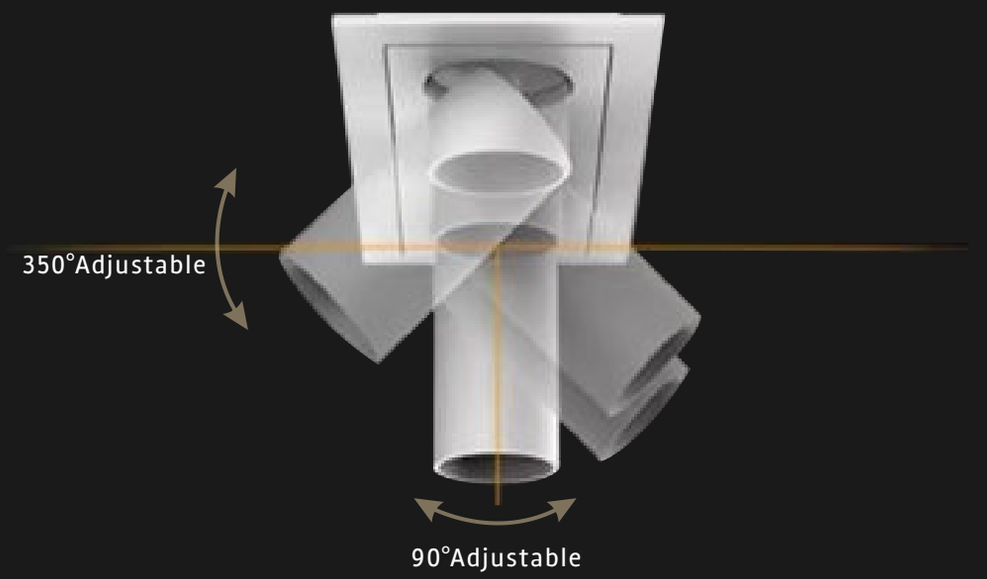





i.SHA
THE ULTIMATE LIGHTING SOLUTION





基本参数/Parameters

产品型号/Model	AC 9348 Line light 方/square
产品尺寸/Size (mm)	L85*46*63H
开孔尺寸/Cutout (mm)	L78*35
功率/Power (W)	3W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L78*38







基本参数/Parameters

产品型号/Model	AC 9348 Line light 方/square
产品尺寸/Size (mm)	L141.5*46*63H
开孔尺寸/Cutout (mm)	L135*38
功率/Power (W)	3W*4
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L135*38







基本参数/Parameters

产品型号/Model	AC 9348 Line light 方/square
产品尺寸/Size (mm)	L259*46*63H
开孔尺寸/Cutout (mm)	L252*38
功率/Power (W)	3W*8
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L252*38



i.SHA
THE ULTIMATE LIGHTING SOLUTION

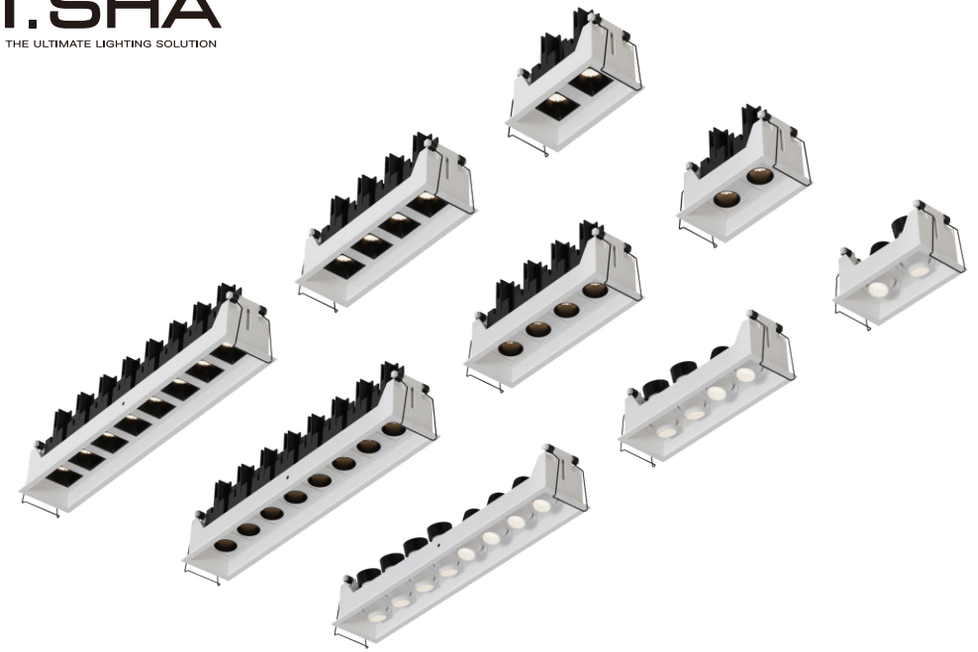

AC 9352 Grille series



square-Anti-glare cup

方形防眩光设计：黑色格栅与光学透镜组合，
可大幅减少光线直射刺眼问题，提升视觉舒适度

Square anti-glare design: A combination of black grille and optical lens can significantly reduce the problem of direct light being too bright, thereby enhancing visual comfort.



Round-Anti-glare cup

圆形防眩杯设计：黑色防眩杯配合深杯结构，
通过物理遮光和光学处理，能有效切断杂散光，
防眩效果（UGR 值）通常可低于 16，
适合对视觉舒适度要求高的空间

Circular anti-glare cup design: The black anti-glare cup is combined with a deep cup structure. Through physical shading and optical processing, it can effectively block stray light, and the anti-glare effect (UGR value) is usually below 16, suitable for spaces with high requirements for visual comfort



Round-Anti-glare bucket

360° 旋转灯头：采用深桶式遮光设计，
灯头可实现水平 360° 旋转 + 垂直角度调节，
能精准对准任意需要照明的区域，适配复杂空间
的照明需求

360° Rotating Lamp Cap: With a deep bucket-shaped light-shielding design, the lamp cap can achieve 360° horizontal rotation + vertical angle adjustment. It can precisely target any area requiring lighting and meets the lighting needs of complex spaces.

i.SHA
THE ULTIMATE LIGHTING SOLUTION

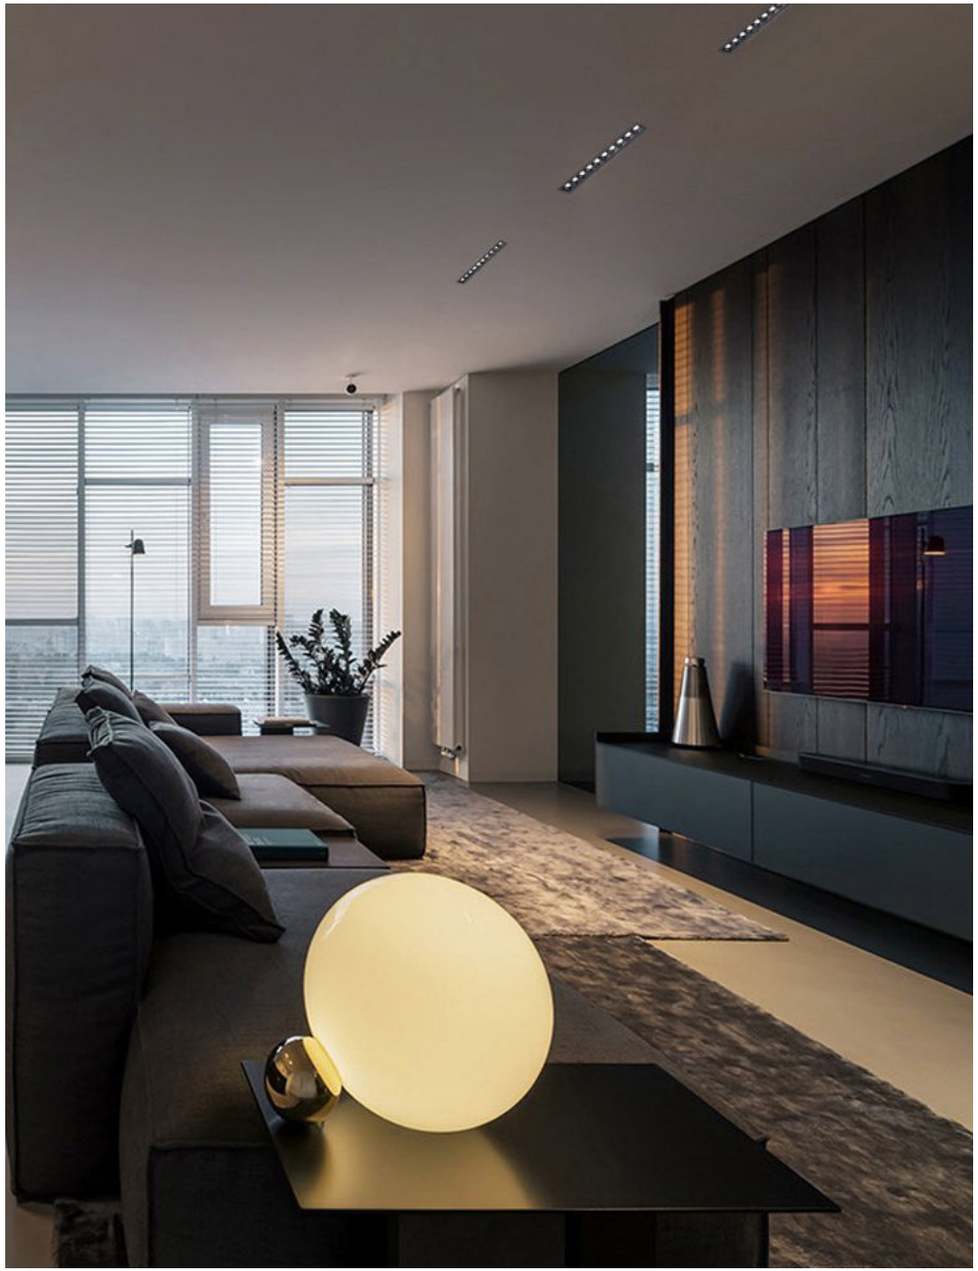

AC 9349 Grille series

i.SHA
THE ULTIMATE LIGHTING SOLUTION

AC 9352 Series

Round-Anti-glare cup

&

square-Anti-glare cup








i.SHA
THE ULTIMATE LIGHTING SOLUTION




基本参数/Parameters

产品型号/Model	AC 9352 Line light 方/square
产品尺寸/Size (mm)	L85*46*65H
开孔尺寸/Cutout (mm)	L78*38
功率/Power (W)	3W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L78*38






基本参数/Parameters

产品型号/Model	AC 9352 Line light 方/square
产品尺寸/Size (mm)	L142*46*65H
开孔尺寸/Cutout (mm)	L135*38
功率/Power (W)	3W*4
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L135*38






基本参数/Parameters

产品型号/Model	AC 9352 Line light 方/square
产品尺寸/Size (mm)	L259*46*66H
开孔尺寸/Cutout (mm)	L252*38
功率/Power (W)	3W*8
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L252*38



i.SHA
THE ULTIMATE LIGHTING SOLUTION





360°旋转灯头，灵活照明局部重点区域

360° rotatable lamp head, flexible lighting for local key areas



灯头可实现水平 360° 旋转 + 0-20°左右调节，能精准对准任意需要照明的区域，适配复杂空间的照明需求

The lamp head can rotate horizontally 360° and adjust up and down by 0-20°, precisely targeting any area that requires illumination and meeting the lighting needs of complex spaces.

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9352 Line light 方/square
产品尺寸/Size (mm)	L85*46*46H
开孔尺寸/Cutout (mm)	L78*38
功率/Power (W)	3W*2
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9352 Line light 方/square
产品尺寸/Size (mm)	L142*46*46H
开孔尺寸/Cutout (mm)	L135*38
功率/Power (W)	3W*4
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9352 Line light 方/square
产品尺寸/Size (mm)	L259*46*46H
开孔尺寸/Cutout (mm)	L252*38
功率/Power (W)	3W*8
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION





A-圆孔光学款

A - Circular Hole Optical Style



B-方孔光学款

B - Square Hole Optical Model



C-高光效光学款

C - High-efficiency Optical Model

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L31.5*31.5*H55
开孔尺寸/Cutout (mm)	L25*25
功率/Power (W)	2W
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L25*25





基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L53.5*31.5*H55
开孔尺寸/Cutout (mm)	L47*25
功率/Power (W)	2W*2
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L47*25





基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L75*31.5*H55
开孔尺寸/Cutout (mm)	L69*25
功率/Power (W)	2W*3
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L69*25





基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L96.5*31.5*H55
开孔尺寸/Cutout (mm)	L90*25
功率/Power (W)	2W*4
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L90*25



i.SHA
THE ULTIMATE LIGHTING SOLUTION

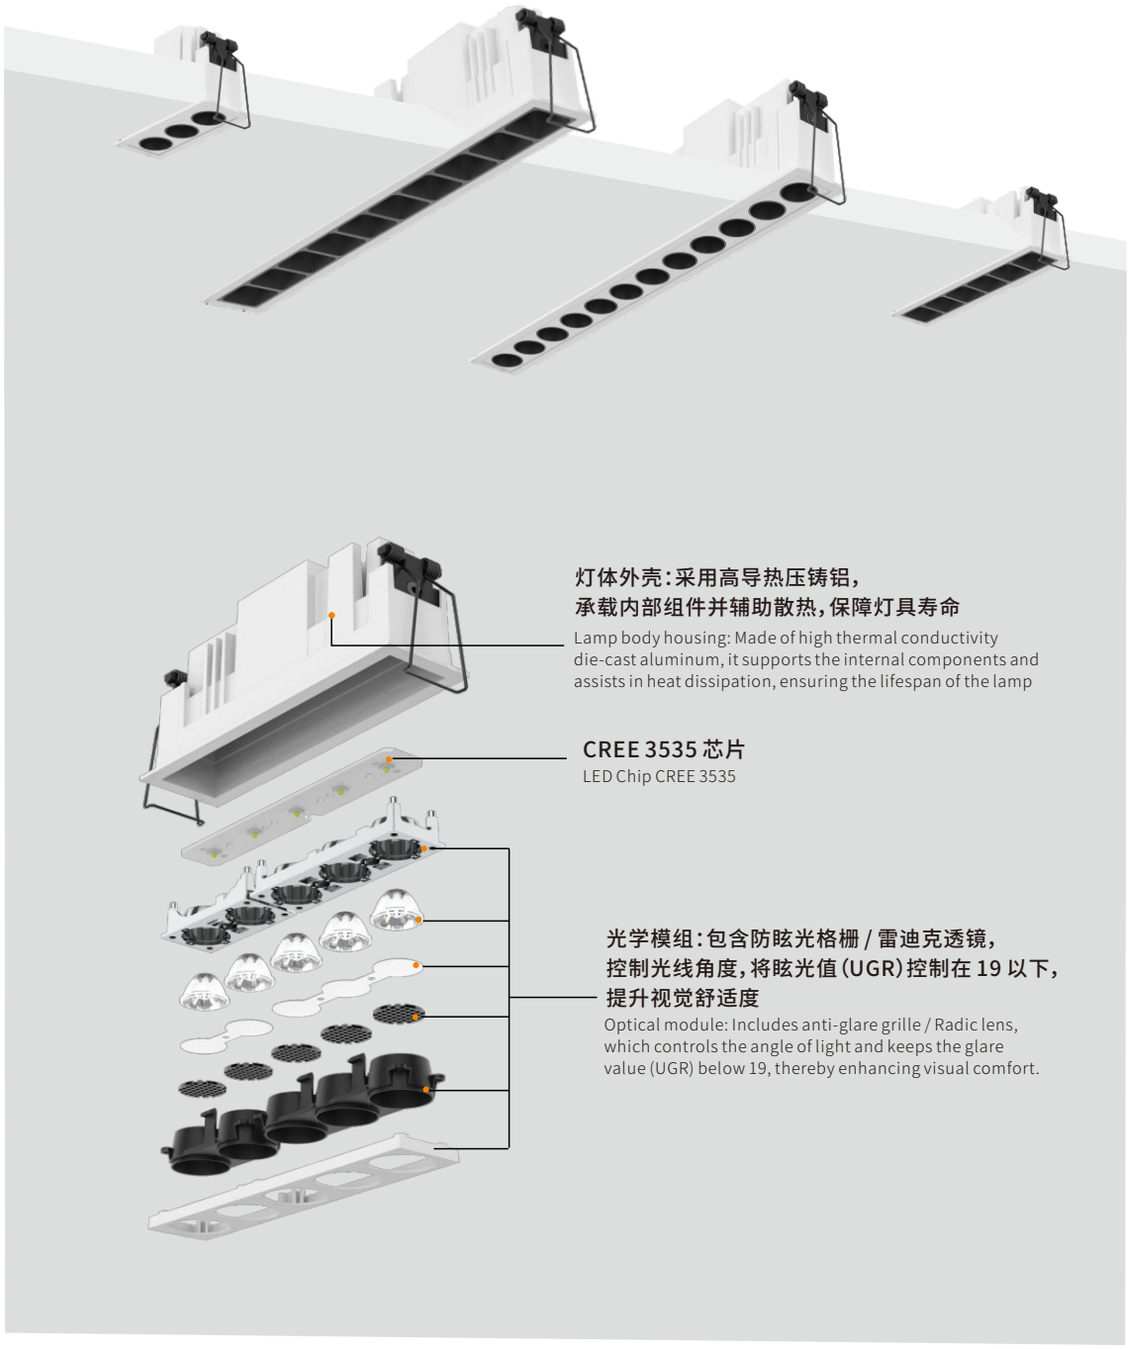

灯体外壳：采用高导热压铸铝，
承载内部组件并辅助散热，保障灯具寿命

Lamp body housing: Made of high thermal conductivity die-cast aluminum, it supports the internal components and assists in heat dissipation, ensuring the lifespan of the lamp

CREE 3535 芯片

LED Chip CREE 3535

光学模组：包含防眩光格栅 / 雷迪克透镜，
控制光线角度，将眩光值（UGR）控制在 19 以下，
提升视觉舒适度

Optical module: Includes anti-glare grille / Radic lens, which controls the angle of light and keeps the glare value (UGR) below 19, thereby enhancing visual comfort.

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters	
产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L118.5*31.5*H55
开孔尺寸/Cutout (mm)	L112*25
功率/Power (W)	2W*5
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L112*25





基本参数/Parameters	
产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L140*31.5*H55
开孔尺寸/Cutout (mm)	L133*25
功率/Power (W)	2W*6
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L133*25





基本参数/Parameters	
产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L226.5*31.5*H55
开孔尺寸/Cutout (mm)	L222*25
功率/Power (W)	2W*10
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L222*25





基本参数/Parameters	
产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L269.5*31.5*H55
开孔尺寸/Cutout (mm)	L263*25
功率/Power (W)	2W*12
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L263*25



i.SHA
THE ULTIMATE LIGHTING SOLUTION





C-高光效光学款

C - High-efficiency Optical Model

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	75*31.5*H55
开孔尺寸/Cutout (mm)	L69*25
功率/Power (W)	3W*3
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	30° 40°

产品尺寸图/Dimension (mm)

开孔/Cutout
L69*25





基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L118.5*31.5*H55
开孔尺寸/Cutout (mm)	L112*25
功率/Power (W)	3W*5
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	30° 40°

产品尺寸图/Dimension (mm)

开孔/Cutout
L112*25



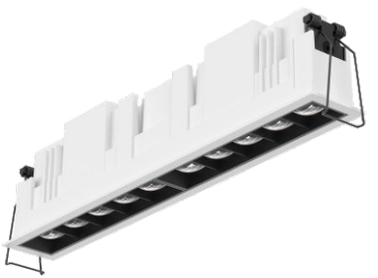

基本参数/Parameters

产品型号/Model	AC 9349 Line light 方/square
产品尺寸/Size (mm)	L226.5*31.5*H55
开孔尺寸/Cutout (mm)	L222*25
功率/Power (W)	3W*10
光学配置/Holder	CREE 3535
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	30° 40°

产品尺寸图/Dimension (mm)

开孔/Cutout
L222*25



i.SHA
THE ULTIMATE LIGHTING SOLUTION



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9347 Line light 方/square
产品尺寸/Size (mm)	L85*46*H58 L76*80*H59
开孔尺寸/Cutout (mm)	L78*38 L78*45
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L78*38 L78*45



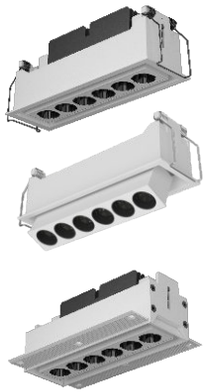

基本参数/Parameters

产品型号/Model	AC 9347 Line light 方/square
产品尺寸/Size (mm)	L142*46*H58 L133*80*H59
开孔尺寸/Cutout (mm)	L135*38 L135*45
功率/Power (W)	2W*6
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L135*38 L135*45



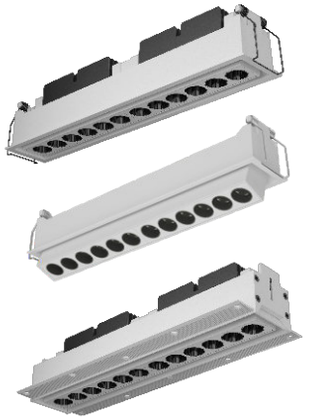

基本参数/Parameters

产品型号/Model	AC 9347 Line light 方/square
产品尺寸/Size (mm)	L259*46*H58 L251*80*H59
开孔尺寸/Cutout (mm)	L252*38 L253*45
功率/Power (W)	2W*12
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
L252*38 L253*45



i.SHA
THE ULTIMATE LIGHTING SOLUTION

AC 9347 Grille series

全面升级，功能更强大

Comprehensive upgrade, with more powerful functions

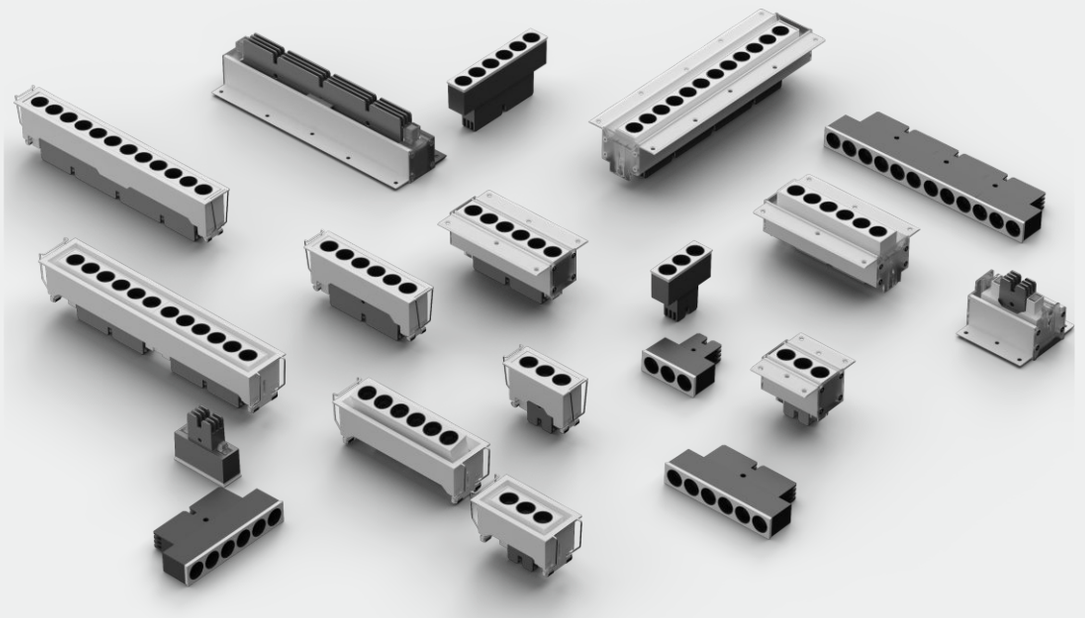

全面升级精巧体积与其灵活的模组设计与自由调节功能，有边款，无边框，灯头调节，精准满足多样化空间的照明需求

Comprehensive upgrade in terms of the exquisite size, its flexible module design and adjustable functions. With bezels, without borders, lamp head adjustment, precisely meeting the lighting needs of various spaces.

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9347 Line light 方/square
产品尺寸/Size (mm)	L70*32*H58 L65*70*H58
开孔尺寸/Cutout (mm)	L63*25 L67*35
功率/Power (W)	2W*3
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9347 Line light 方/square
产品尺寸/Size (mm)	L127*32*H58 L122*70*H58
开孔尺寸/Cutout (mm)	L120*25 L124*35
功率/Power (W)	2W*6
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)



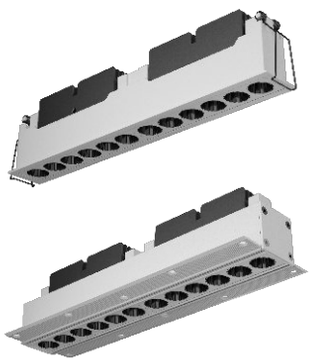

基本参数/Parameters

产品型号/Model	AC 9347 Line light 方/square
产品尺寸/Size (mm)	L245*32*H58 L239*70*H58
开孔尺寸/Cutout (mm)	L240*25 L241*35
功率/Power (W)	2W*12
光学配置/Holder	CREE XPE
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION

KX 3140 系列防水筒灯

WATERPROFOF SERIES

i.SHA
THE ULTIMATE LIGHTING SOLUTION



i.SHA
THE ULTIMATE LIGHTING SOLUTION

一体式高效散热，前置式防水设计
INTEGRATED EFFICIENT HEAT DISSIPATION,
FRONT WATERPROOF DESIGN



i.SHA
THE ULTIMATE LIGHTING SOLUTION



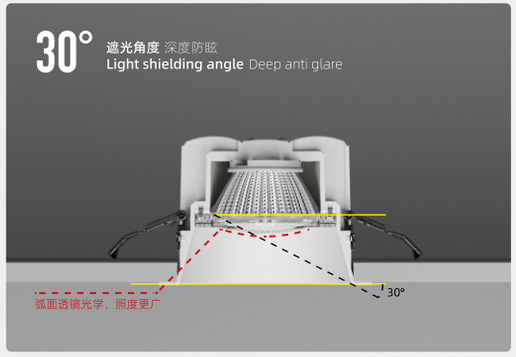

产品分解实物图
Product Breakdown Diagram



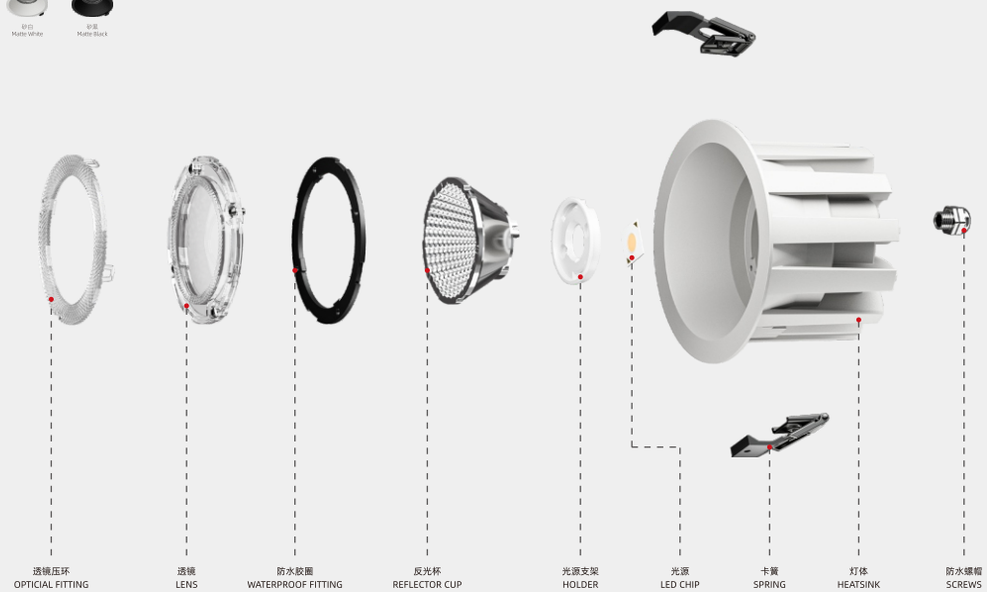

i.SHA
THE ULTIMATE LIGHTING SOLUTION

75mm



基本参数/Parameters

产品型号/Model	KX 3140 75-圆/Round
产品尺寸/Size (mm)	ф86*65H
开孔尺寸/Cutout (mm)	ф75
功率/Power (W)	12W
光学配置/Holder	1304/1507/020 /030/1816
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)



145mm



基本参数/Parameters

产品型号/Model	KX 3140 145-圆/Round
产品尺寸/Size (mm)	ф160*90H
开孔尺寸/Cutout (mm)	ф145
功率/Power (W)	35-40W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)



95mm



基本参数/Parameters

产品型号/Model	KX 3140 95-圆/Round
产品尺寸/Size (mm)	ф108*77H
开孔尺寸/Cutout (mm)	ф95
功率/Power (W)	20W
光学配置/Holder	1304/1507/020 /030/1816
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)



165mm



基本参数/Parameters

产品型号/Model	KX 3140 165-圆/Round
产品尺寸/Size (mm)	ф180*109H
开孔尺寸/Cutout (mm)	ф165
功率/Power (W)	40-45W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)



125mm



基本参数/Parameters

产品型号/Model	KX 3140 125-圆/Round
产品尺寸/Size (mm)	ф140*88H
开孔尺寸/Cutout (mm)	ф125
功率/Power (W)	30W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)



200mm



基本参数/Parameters

产品型号/Model	KX 3140 200-圆/Round
产品尺寸/Size (mm)	ф220*125.5H
开孔尺寸/Cutout (mm)	ф200
功率/Power (W)	50-55W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION



哑白　哑黑　白+黑　白+银



AC 9161 悦系列
DOWNLIGHT

高流明 | 防眩目 | 防水防雾

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9161 75-圆/Round
产品尺寸/Size (mm)	φ83*65H
开孔尺寸/Cutout (mm)	φ75
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ75





基本参数/Parameters

产品型号/Model	AC 9161 95-圆/Round
产品尺寸/Size (mm)	φ103*70H
开孔尺寸/Cutout (mm)	φ95
功率/Power (W)	20W
光学配置/Holder	1304/1507/020 /030/1816
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ95





基本参数/Parameters

产品型号/Model	AC 9161 125-圆/Round
产品尺寸/Size (mm)	φ132*75H
开孔尺寸/Cutout (mm)	φ125
功率/Power (W)	30W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ125





基本参数/Parameters

产品型号/Model	AC 9161 150-圆/Round
产品尺寸/Size (mm)	φ160*80H
开孔尺寸/Cutout (mm)	φ150
功率/Power (W)	40W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout
φ150



i.SHA
THE ULTIMATE LIGHTING SOLUTION

AC 9161 悦系列
DOWNLIGHT

高流明 | 防眩目 | 防水防雾

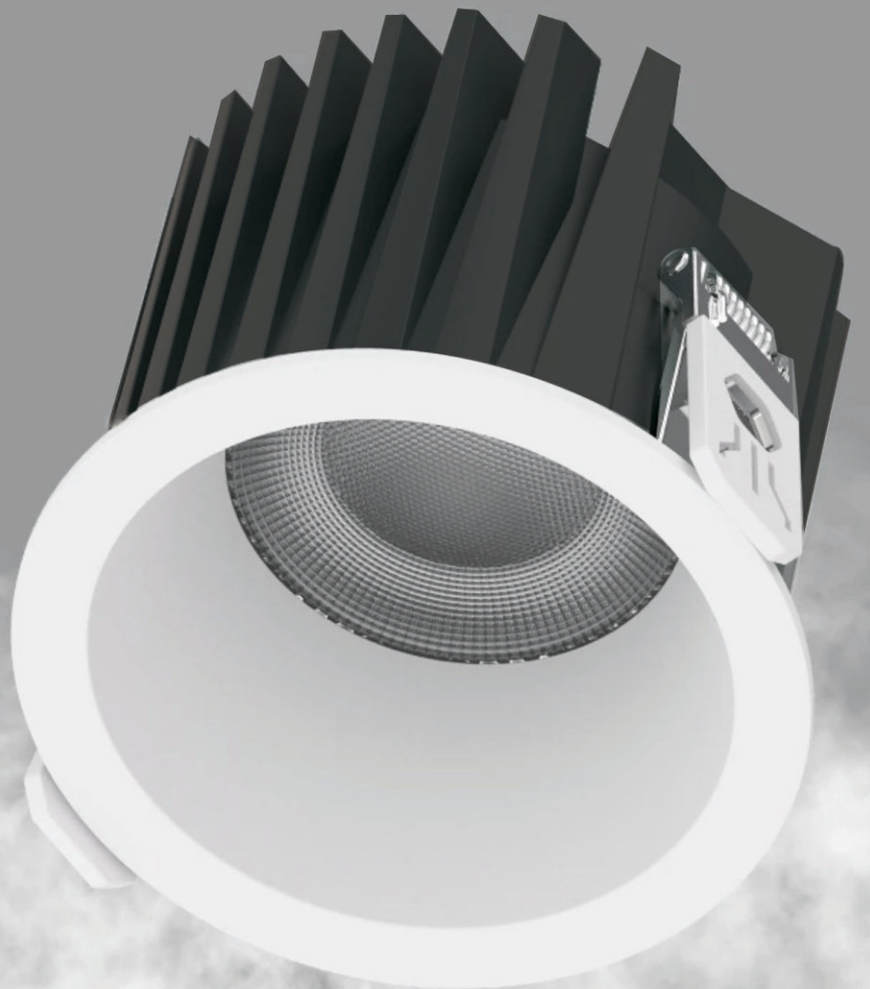

i.SHA
THE ULTIMATE LIGHTING SOLUTION





基本参数/Parameters

产品型号/Model	AC 9161 170-圆/Round
产品尺寸/Size (mm)	ϕ180*85H
开孔尺寸/Cutout (mm)	ϕ170
功率/Power (W)	40-45W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ170





基本参数/Parameters

产品型号/Model	AC 9161 170-圆/Round
产品尺寸/Size (mm)	ϕ180*85H
开孔尺寸/Cutout (mm)	ϕ170
功率/Power (W)	50W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	60°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ170



i.SHA
THE ULTIMATE LIGHTING SOLUTION

Bright moon series

KX 3085 皓月系列





90°



15°-60°



柔光



为满足更多空间对光的设计需求皓影系列

分别搭载三大光学系统自由切换

90°出光 40°截光角 + 15°~60°配光 + 超级柔光

同时可以透镜款添加蜂窝网及各种光学配件

真正满足多空间多用途应用

To meet the design requirements of more spaces for light, the Avera series

Equipped with three optical systems respectively, which can be freely switched.

90° beam angle, 40° cutoff angle + 15° to 60° distribution + super soft light

At the same time, the lens model can be equipped with cellular networks and various optical accessories.

Properly meeting the requirements for multi-space and multi-purpose applications

适用于：

酒店、商场、服装店、办公室、家居等照明场所。

Hotel, shopping mall, clothing store, office, home and other lighting venues.

i.SHA
THE ULTIMATE LIGHTING SOLUTION





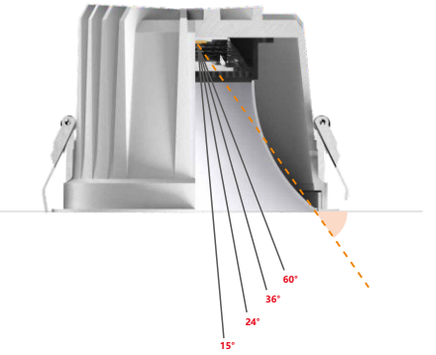

角度决定高度 The angle determines the height

专为满足层高3-12米空间高度量身定制，搭载60°36°24°15°系列光学配光

Designed specifically to meet the space height requirements of 3-12 meters, it is equipped with the 60°, 36°, 24°, and 15° series of optical distribution optics.

多种色彩防眩罩工艺定制，为空间增添更多趣味性色彩

Customized multi-color anti-glare covers are available, adding more interesting colors to the space.

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX3085-A 75-圆/Round
产品尺寸/Size (mm)	ϕ82*52.5H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	7W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX3085-A 95-圆/Round
产品尺寸/Size (mm)	ϕ101*69H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	15W
光学配置/Holder	1304/1507/020/1816/030
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX3085-A 130-圆/Round
产品尺寸/Size (mm)	ϕ137*97H
开孔尺寸/Cutout (mm)	ϕ130
功率/Power (W)	25W
光学配置/Holder	1507/020/1816/030/040
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION



超级泛光系列Super Floodlight Series

出光90° 截光角40°

Outlight 90° Cut-off angle 40°

安装灯具间距大 高度的均匀性光斑 舒适的视觉效果

Large spacing for installing lamps, uniform light spots at different heights, and comfortable visual effect

适合超高均匀度的高级空间场所应用

Suitable for advanced spatial applications with extremely high uniformity

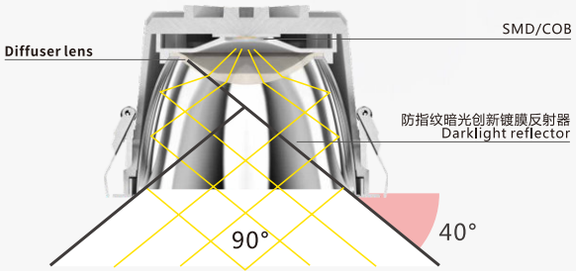

UGR <19



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX3085-A 75-圆/Round
产品尺寸/Size (mm)	ϕ82*52.5H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	7W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	90°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX3085-A 95-圆/Round
产品尺寸/Size (mm)	ϕ101*69H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	15W
光学配置/Holder	1304/1507/020/1816/030
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	90°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX3085-B 130-圆/Round
产品尺寸/Size (mm)	ϕ137*97H
开孔尺寸/Cutout (mm)	ϕ130
功率/Power (W)	25W
光学配置/Holder	1507/020/1816/030/040
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	90°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION



让灯光与空间融为一体

Let the light blend seamlessly with the space.

创新柔光光学设计，消融灯具边界设计理念，让光线真正融入天花，让空间本身更魅力

Innovative soft-light optical design, eliminating the boundary concept of lamps,
allowing the light to truly blend into the ceiling, making the space itself more captivating.

让光线真正融入天花，让空间本身更魅力，适应全色域光源色温调节变化，

光斑依然完美柔和，享受舒适生活，从这里开始...

Let the light truly blend into the ceiling, making the space even more captivating.
Adapt to the color temperature adjustment of the full-color spectrum light source.
The light spots remain perfectly soft. Enjoy a comfortable life. Start from here....



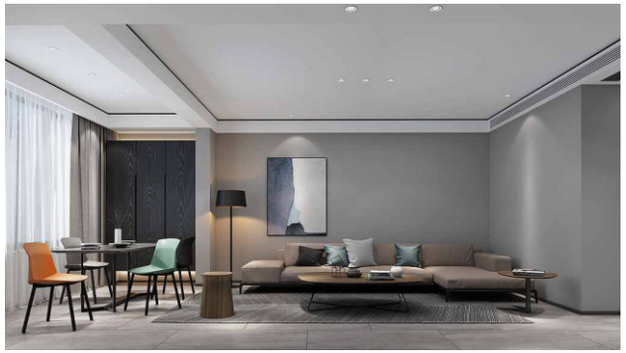

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX3085-A 75-圆/Round
产品尺寸/Size (mm)	ϕ82*52.5H
开孔尺寸/Cutout (mm)	ϕ75
功率/Power (W)	7W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	110°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX3085-A 95-圆/Round
产品尺寸/Size (mm)	ϕ101*69H
开孔尺寸/Cutout (mm)	ϕ95
功率/Power (W)	15W
光学配置/Holder	1304/1507/020/1816/030
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	110°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX3085-B 130-圆/Round
产品尺寸/Size (mm)	ϕ137*97H
开孔尺寸/Cutout (mm)	ϕ130
功率/Power (W)	25W
光学配置/Holder	1507/020/1816/030/040
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	110°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION

KX 3182 塔米系列
DOWNLIGHT

高流明 | 防眩目 | 防水防雾 | 高空筒灯

i.SHA
THE ULTIMATE LIGHTING SOLUTION





基本参数/Parameters

产品型号/Model	KX 3182 114-圆/Round
产品尺寸/Size (mm)	ϕ114*152H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	25W
光学配置/Holder	020 /030/040/1507/1816
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX 3182 138-圆/Round
产品尺寸/Size (mm)	ϕ138*163H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	30W
光学配置/Holder	020 /030/040/1507/1816
防水等级/IP Level	IP 65
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION

KX 3182 塔米系列
DOWNLIGHT

高流明 | 防眩目 | 防水防雾 | 高空筒灯



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3182 170-圆/Round
产品尺寸/Size (mm)	ϕ170*182H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	50W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX 3182 206-圆/Round
产品尺寸/Size (mm)	ϕ206*215H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	80W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	KX 3182 236-圆/Round
产品尺寸/Size (mm)	ϕ236*240H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	100W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 65
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)







i.SHA
THE ULTIMATE LIGHTING SOLUTION

Ac9197 曼迪系列
DOWNLIGHT

高流明 | 防眩目 | 高空筒灯

i.SHA
THE ULTIMATE LIGHTING SOLUTION









基本参数/Parameters

产品型号/Model	AC 9197 圆/Round
产品尺寸/Size (mm)	ϕ180*230H
	ϕ200*270H
	ϕ240*300H
功率/Power (W)	30-50W 60-80W 70-100W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)

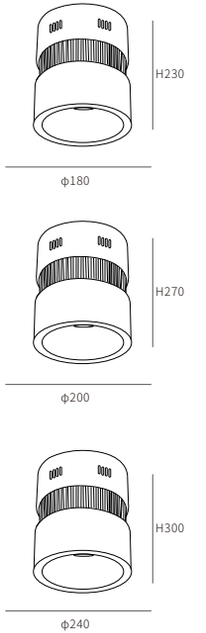

i.SHA
THE ULTIMATE LIGHTING SOLUTION

AC 9076 艾顿系列
DOWNLIGHT

高流明 | 防眩目 | 明装筒灯



i.SHA
THE ULTIMATE LIGHTING SOLUTION

产品分解实物图
Product Breakdown Diagram

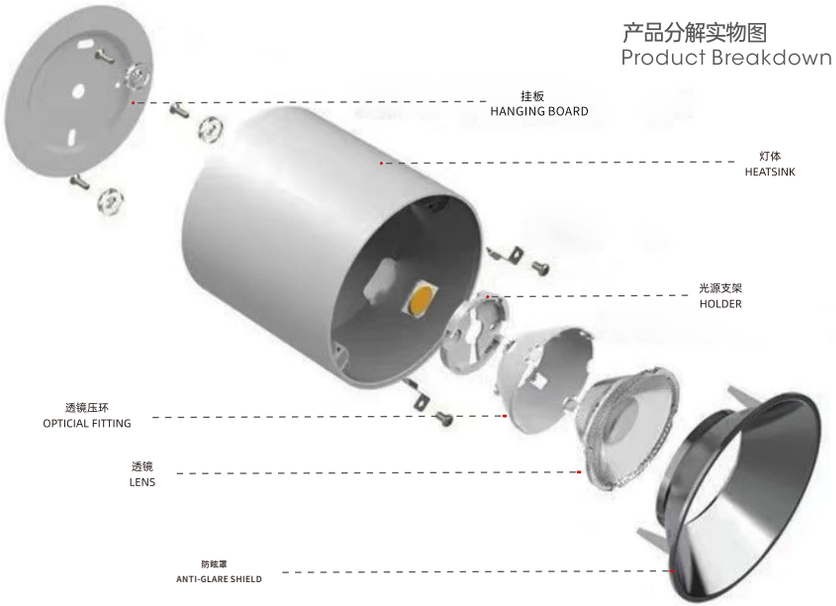



基本参数/Parameters

产品型号/Model	AC 9076 77-圆/Round
产品尺寸/Size (mm)	ϕ77*85H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	6W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9076 100-圆/Round
产品尺寸/Size (mm)	ϕ100*90H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	12W
光学配置/Holder	1304/1507/020
防水等级/IP Level	IP20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION







AC 9076 艾顿系列
DOWNLIGHT

高流明 | 防眩目 | 明装筒灯

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9076 120-圆/Round
产品尺寸/Size (mm)	ϕ120*100H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	20W
光学配置/Holder	020 /030/040/1507
防水等级/IP Level	IP20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	Ac9076 150-圆/Round
产品尺寸/Size (mm)	ϕ150*120H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	30W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	Ac9076 175-圆/Round
产品尺寸/Size (mm)	ϕ175*130H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	35W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9076 200-圆/Round
产品尺寸/Size (mm)	ϕ200*140H
开孔尺寸/Cutout (mm)	/
功率/Power (W)	40-45W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 60°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION



Adjustable focal length



KX 3090 鹰眼系列
TRACKLIGHT

调焦 | 防眩目 | 商业轨道射灯

i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3090 轨道调焦款
产品尺寸/Size (mm)	ϕ55*115H
	ϕ65*135H
	ϕ75·150H
	ϕ85·165H
功率/Power (W)	12W 18W 25W 35W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°



i.SHA
THE ULTIMATE LIGHTING SOLUTION





KX 3090 鹰眼系列
TRACKLIGHT

防眩目 | 商业轨道射灯







基本参数/Parameters

产品型号/Model	KX 3090 轨道款
产品尺寸/Size (mm)	ϕ55*115H
	ϕ65*135H
	ϕ75·150H
	ϕ85·165H
功率/Power (W)	12W 18W 25W 35W
光学配置/Holder	020 /030/040/1507/1816/2520

防水等级/IP Level	IP 20
面环颜色/Color	☐ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

i.SHA
THE ULTIMATE LIGHTING SOLUTION

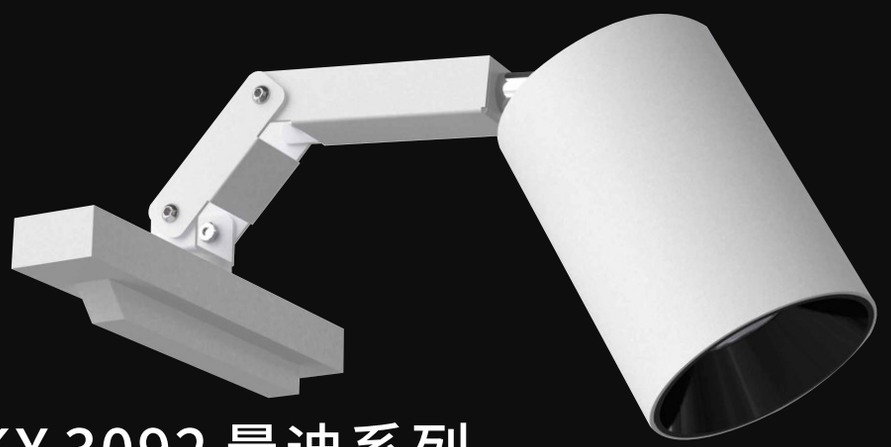

KX 3092 曼迪系列
TRACKLIGHT

防眩目 | 商业轨道射灯

光学角度/Beam







隐藏式轨道灯





i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	KX 3092 轨道款
产品尺寸/Size (mm)	ϕ54*110H
	ϕ68*130H
	ϕ85·140H
功率/Power (W)	12W 20W 30W
光学配置/Holder	020 /030/040/1507/1816/2520
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38°







i.SHA
THE ULTIMATE LIGHTING SOLUTION





AC 9279

轨道款/明装吸顶款/嵌入式款

Track type / Surface-mounted ceiling type / Recessed type

Adjustable focal length



i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9279-TR 48-圆/Round
产品尺寸/Size (mm)	φ48*105*165H
功率/Power (W)	10W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC9279-TR 55-圆/Round
产品尺寸/Size (mm)	φ55*130*180H
功率/Power (W)	15W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9279-TR 65-圆/Round
产品尺寸/Size (mm)	φ65*150*215H
功率/Power (W)	25W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9279-TR 75-圆/Round
产品尺寸/Size (mm)	φ75*150*215H
功率/Power (W)	30W
光学配置/Holder	020/030/040/1507/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9279-TR 85-圆/Round
产品尺寸/Size (mm)	φ85*175*240H
功率/Power (W)	35W
光学配置/Holder	020/030/040/1507/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)



i.SHA
THE ULTIMATE LIGHTING SOLUTION

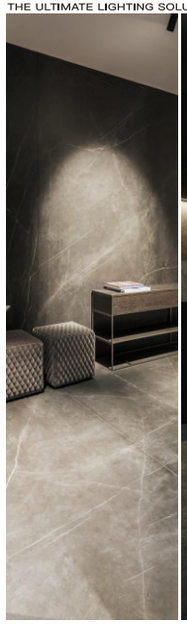





AC 9279 明装吸顶款 Surface-mounted ceiling type

Adjustable focal length





i.SHA
THE ULTIMATE LIGHTING SOLUTION



基本参数/Parameters

产品型号/Model	AC 9279-SF 48-圆/Round
产品尺寸/Size (mm)	φ48*105*149H
功率/Power (W)	10W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC9279-SF 55-圆/Round
产品尺寸/Size (mm)	φ55*130*174H
功率/Power (W)	15W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9279-SF 65-圆/Round
产品尺寸/Size (mm)	φ65*150*195H
功率/Power (W)	25W
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9279-SF 75-圆/Round
产品尺寸/Size (mm)	φ75*150*200H
功率/Power (W)	30W
光学配置/Holder	020/030/040/1507/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)





基本参数/Parameters

产品型号/Model	AC 9279-SF 85-圆/Round
产品尺寸/Size (mm)	φ85*175*225H
功率/Power (W)	35W
光学配置/Holder	020/030/040/1507/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)



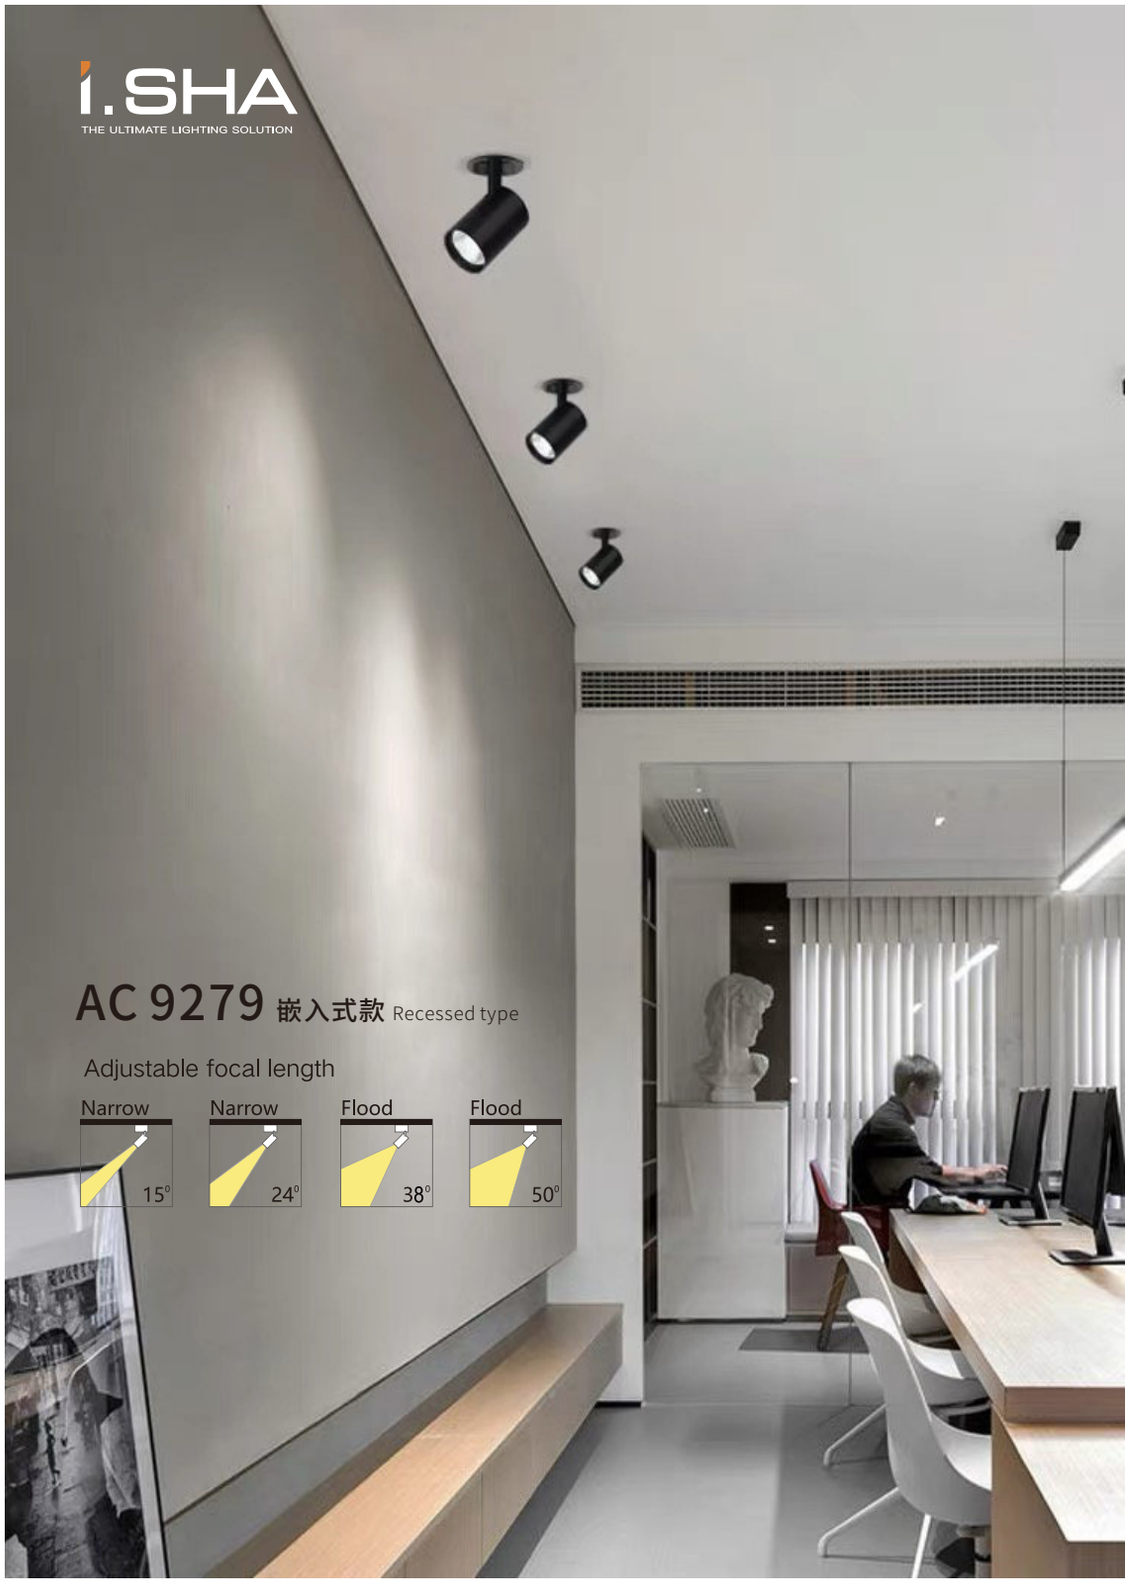



基本参数/Parameters

产品型号/Model	AC 9279-CL 48-圆/Round
产品尺寸/Size (mm)	ϕ48*105*126H
功率/Power (W)	10W
开孔尺寸/Cutout (mm)	ϕ55
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	AC 9279-CL 55-圆/Round
产品尺寸/Size (mm)	ϕ55*130*126H
功率/Power (W)	15W
开孔尺寸/Cutout (mm)	ϕ55
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ55





基本参数/Parameters

产品型号/Model	AC 9279-CL 65-圆/Round
产品尺寸/Size (mm)	ϕ65*150*171H
功率/Power (W)	25W
开孔尺寸/Cutout (mm)	ϕ75
光学配置/Holder	1304/020/1507
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	AC 9279-CL 75-圆/Round
产品尺寸/Size (mm)	ϕ75*150*171H
功率/Power (W)	30W
开孔尺寸/Cutout (mm)	ϕ75
光学配置/Holder	020/030/040/1507/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ75





基本参数/Parameters

产品型号/Model	AC 9279-CL 85-圆/Round
产品尺寸/Size (mm)	ϕ85*175*197H
功率/Power (W)	35W
开孔尺寸/Cutout (mm)	ϕ95
光学配置/Holder	020/030/040/1507/1816
防水等级/IP Level	IP 20
面环颜色/Color	□ 砂白/Matte White ■ 砂黑/Matte Black
光学角度/Beam Angle (°)	15° 24° 38° 50°

产品尺寸图/Dimension (mm)

开孔/Cutout
ϕ95



Lighting Design Customizes Art

灯光设计定制艺术

Thank you

感谢您的查阅